



CORDIS HIGH PRESSURE PROPORTIONAL PRESSURE CONTROLS



Precise, linear pressure control within a closed-loop system with high accuracy and repeatability

Medium	Clean, dry, non-corrosive gases
Wetted Material	Sensor: Stainless Steel, Manifold: Anodized Aluminum, Valves: Nickel-Plated Brass Body & Viton Core
Valve Type	Normally-Closed
Operating Pressure Range	0 to 500 psig
Max. Inlet	550 psig
Typical Response Time	<20 ms (application dependent)
Accuracy	±0.5% of Full Scale
Resolution	≤50 mV
Max. Hysteresis	≤0.25%
Linearity	≤0.2%
Port Size	1/8" NPT, G1/8
Temperature Range	32° to 180°F
Mounting Attitude	Any
Filtration	40 micron
More Details	clippard.com/link/cordis

Equipment used for test and calibration is NIST Traceable



Clippard's newly-designed high pressure electronic valves provide fast, stable control of pressure

Known for reliability, innovation and focus on miniature pneumatics, Clippard's new Cordis controls utilize the proven EV line of electronic valves allowing for steady, repeatable downstream pressure under static conditions. The result, a precise linear pressure control within a closed-loop system.

The Cordis uses a microcontroller, integrated pressure sensor, and two Clippard EV electronic valves. The inlet valve is connected to the moderately regulated supply pressure and the exhaust valve is connected to a port that vents excess pressure to atmosphere. Once a command is increased, the inlet valve opens up to allow supply pressure to pass over the sensor element which provides an active feedback for the microcontroller to satisfy the set point in the process. If at any point the sensor detects a value higher than the set point, the exhaust valve will modulate open to vent off the excess pressure to maintain a stable and accurate control pressure in the process.

The Cordis is adaptable to a variety of sensors that can close the loop around only pressure.

Consult Clippard for application specifications to confirm viability.

- Smooth linear control
- Integrated internal or external sensor feedback
- Static applications
- Customizable pressure ranges and mounting options

Voltage	15 to 24 VDC
Current Draw	<250 mA
Protection Rating	IP65
Signal/Command	Electrical: 0 to 10 VDC or 4 to 20 mA Serial: 3.3 VDC




ORDERING INFORMATION

Model	Type	Porting	Signal/Command	Calibrated Pressure Range	Min. Volume/Flow @ Max. Pressure*
CHP- Cordis Pressure Control	H Housed Unit	F 1/8" NPT G G1/8	E 0 to 10 VDC R 3.3 VDC Serial I 4 to 20 mA	-2G 0 to 200 psig -3G 0 to 300 psig -5G 0 to 500 psig -2M 0 to 13 bar -3M 0 to 20 bar -5M 0 to 34 bar	G ≥0.75 in ³ / 3.0 l/min H ≥1.00 in ³ / 6.5 l/min I ≥2.00 in ³ / 12.5 l/min
Example Part No. CHP-HFE-3GH					

Accessories

- CPCH-C1** Actuation Cable, 8-Pin, 6'
- CPCH-C2** 3.3 VDC Serial Cable, 3'
- CPCH-B2** Mounting Bracket

*All flow ranges are factory tested at 100 psig on the process side
Consult Clippard for availability of non-standard commands and other options.

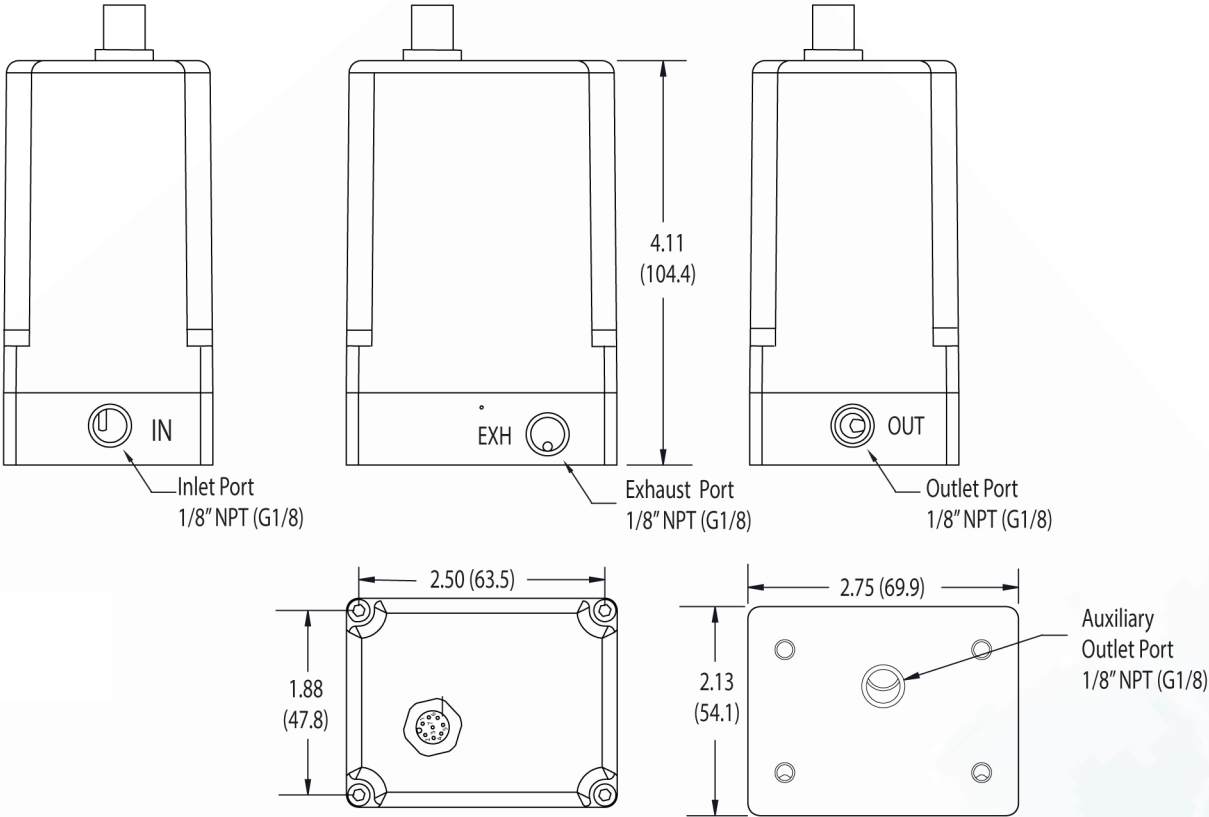

PROFESSIONALLY DISTRIBUTED BY:



SALES@AIROYAL.BIZ | AIROYALCOMPANY.NET

NEW JERSEY - 43 Newark Way, Maplewood, NJ 07040
973-761-4150 Fax 973-761-5731

PENNSYLVANIA - 610-314-5566 Toll Free: 866-247-6645

DELAWARE & MARYLAND - Toll Free: 866-247-6645 Fax 410-235-0011

NEW YORK - 306 Commack Rd. Ste. 200, Commack, NY 11725
516-248-4833 Fax 631-499-0119





AIROYAL COMPANY

AUTHORIZED

Clippard

Distributor

SALES@AIROYAL.BIZ | AIROYALCOMPANY.NET

NEW JERSEY

43 Newark Way, Maplewood, NJ 07040

973-761-4150 Fax 973-761-5731

PENNSYLVANIA

610-314-5566 Toll Free: 866-247-6645

DELAWARE & MARYLAND

Toll Free: 866-247-6645 Fax 410-235-0011

NEW YORK

306 Commack Rd. Ste. 200, Commack, NY 11725

516-248-4833 Fax 631-499-0119