



Precision Pneumatic and Electropneumatic Controls

- Current-to-Pressure (I/P) Transducers
- Voltage-to-Pressure (E/P) Transducers
- Pressure-to-Current (P/I) Transducers
- Precision Air Pressure Regulators
- Valve Positioners
- Filter Regulators
- Gas Pressure Regulators
- Volume Boosters
- Snap Acting Relays & Bias Relays
- Motorized Regulators
- Liquid Level Systems
- Friction-free Diaphragm Air Cylinders
- Custom Engineered Devices

 **ControlAir** 
PRECISION PNEUMATIC & ELECTROPNEUMATIC CONTROLS

Table of Contents

Air Pressure Regulators	4
Air Filters	10
Intrinsically Safe, I/P, E/P Transducers .	12
Explosion-Proof I/P Transducers	13
P/I Transducers	14
Integrated Process Control	14
Manifold	14
Volume Boosters	15
Air Relays	16
Logic Relays	17
Liquid Level	17
Diaphragm Air Cylinders	18
Valve Positioner	19

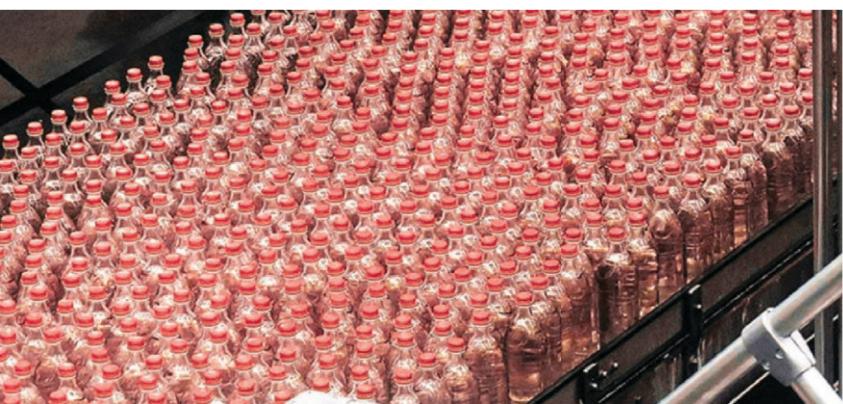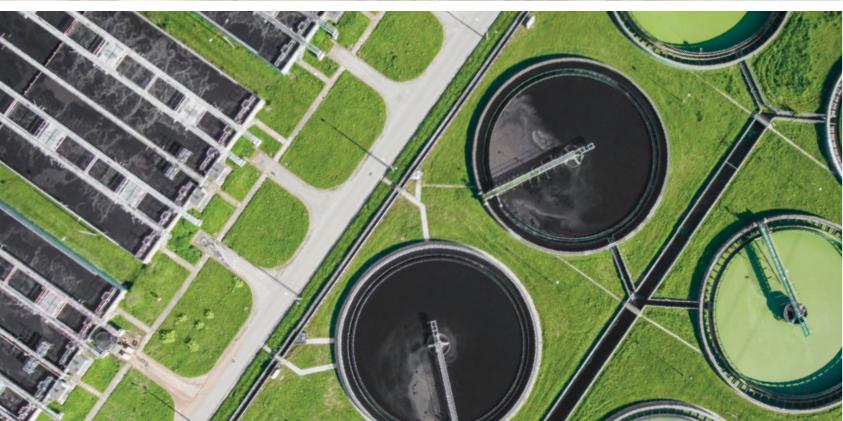

About Us

ControlAir is a worldwide leading manufacturer of precision pneumatic and electro pneumatic control products essential to automated industrial equipment, process control systems and instrumentation, laboratory research and analysis, energy management, fluid power, robotics, and valve automation applications. An ISO-9001:2015 registered quality system assures tightly controlled specifications and processes, resulting in dependable pneumatic controls.

The company has an excellent reputation for high performance, quality products. These products include current-to-pressure (I/P) transducers, voltage-to-pressure (E/P) transducers, pneumatic-to-current (P/I) transducers, precision air pressure regulators, filter regulators, volume boosters, motorized regulators, rolling diaphragm air cylinders, valve positioners and custom engineered devices. ControlAir distinguishes itself from competitors in the unique ability to adapt its products to customer-specific applications through joint development projects and strategic design partnerships.

Founded in 1987, ControlAir's dedicated effort, in combination with vast knowledge of pneumatic controls technology and its markets, has provided the company with consistent sales growth over the history of the company. Continual investment in research and development has been made in order to produce a steady stream of new products that will fuel future growth. Development of a worldwide distribution network has led to an active, international presence on every continent from North and South America to Europe, the Middle East and the Far East.

ControlAir is headquartered in a custom built engineering and production facility in Amherst, New Hampshire, USA. A technology/application center provides design capabilities for quick response to demands for product customization to fit specific application needs.

The company's capability to manufacture products to tightly controlled specifications and processes allows ControlAir to offer solutions with higher performance standards, increased dependability and tighter quality standards than might be found elsewhere in the market.



Air Pressure Regulators

Regulator Groups	Model Series	Type	Sensitivity	Port Size								Porting		Max. Supply Pressure	Max. Output Range	Max. Flow Capacity	Body Material	
				10-32	M5	1/16"	1/8"	3/8"	1/4"	1/2"	3/4"	1"	2"	NPT	BSP			
Precision	90	Sensitive	1/4" in. (6.4 mm)			X							X	X	150 psig (10 bar)	1.4-120 psig (0.1-8 bar)	14 SCFM (396 NL/min)	Aluminum Alloy
Precision	100	Sensitive	1/8 in. (3.2 mm)			X	X	X					X	X	150 psig (10.5 bar)	2-120 psig (0.14-8 bar)	14 SCFM at 100 psig supply -20 psig outlet (420 NL/min at 6.8 bar supply; 1.4 bar outlet)	Zinc Alloy
Precision	700	Sensitive	1/8" in. (3.2 mm)			X	X	X					X	X	250 psig (17 bar)	0-150 psig (0-10 bar)	80 SCFM (2,265 NL/min)	Aluminum Alloy
Precision	7000	Sensitive, High Flow	1/2" in. (12.7 mm)				X	X	X				X		250 psig (17 bar)	0-200 psig (0-14 bar)	250 SCFM (7,079 NL/min)	Aluminum Alloy
Precision	7100	Sensitive, High Flow	1/4" in. (6.35 mm)				X	X	X				X		250 psig (17 bar)	2-120 psig (0.14-8 bar)	250 SCFM (7,079 NL/min)	Aluminum Alloy
Precision	800	Sensitive	1/2" (12.7mm) water	X	X	X									250 psig (17 bar)	0-100 psig (0-7bar)	5 SCFM (150 NL/min)	Anodized Aluminum
Precision	100M	Sensitive, Motorized				X	X	X					X		150 psig (10 bar)	2-120 psig (0.14-8 bar)	14 SCFM at 100 psig 20 psig outlet (396 NL/min at 7 bar supply; 1.4 bar outlet)	
Filter	300	General Service						X					X		250 psig (17 bar)	0-120 psig (0-8 bar)	22 SCFM at 100 psig 20 psig outlet (623 NL/min at 7 bar supply; 1.4 bar outlet)	Aluminum Alloy
Filter	310	NACE						X					X		250 psig (17 bar)	0-100 psig (0-7 bar)	20 SCFM at 100 psig 20 psig outlet (566 NL/min at 7 bar supply; 1.4 bar outlet)	Aluminum Alloy
Filter	330	General Purpose					X	X					X		150 psig (10 bar), 250 psig (17 bar)	0-120 psig (0-8 bar)	33 SCFM (934 NL/min), 150 SCFM (4,247 NL/min)	Aluminum Alloy
Filter	335	NACE						X					X		250 psig (17 bar)	0-100 psig (0-7 bar)	33 SCFM (934 NL/min)	Aluminum Alloy
Filter	FA12	Coalescing Filter Regulator			X	X							X		0-150 psig (0-10 bar)	7-140 psig (0.5-10 bar)	Reg. 46 SCFM (1,300 nl/m)	Aluminum
Stainless Steel Filter	350	NACE					X	X					X		150 psig (10 bar), 290 psig (20 bar)	0-150 psig (0-10 bar)	160 SCFM (4530 NL/min)	316 Stainless Steel
Stainless Steel Filter	380	High Flow						X	X				X		150 psig (10 bar), 290 psig (20 bar)	0-200 psig (0-14 bar)	425 SCFM (12,034 NL/min)	316 Stainless Steel
Stainless Steel	360	NACE					X	X					X		290 psig (20 bar)	0-150 psig (0-10 bar)	160 SCFM (4530 NL/min)	316 Stainless Steel
Stainless Steel	390	High Flow						X	X				X		150 psig (10 bar), 290 psig (20 bar)	0-200 psig (0-14 bar)	425 SCFM (12,034 NL/min)	316 Stainless Steel
Stainless Steel	3600	High Pressure, NACE					X						X		6000 psig (413 bar)	0-225 psig (0-15.5 bar)	4500 SCFH	316 Stainless Steel
Pressure	340	General Service					X	X					X		250 psig (17 bar)	0-120 psig (0-8 bar)	33 SCFM (934 NL/min), 150 SCFM (4,247 NL/min)	Aluminum Alloy
Pressure	400	General Service						X					X		250 psig (17 bar)	0-120 psig (0-8 bar)	20 SCFM (570 NL/min)	Aluminum Alloy
Pressure	850	Miniature, Air	1/4" in. (6.4 mm)	X	X			X	X				X		150 psig (10 bar)	1.4-120 psig (0.1-8 bar)	14 SCFM (396 NL/min)	Zinc Alloy
Pressure	860	Miniature, Water	1/4" in. (6.4 mm)	X	X			X	X				X		150 psig (10 bar)	1.4-120 psig (0.1-8 bar)	14 SCFM (396 NL/min)	Electroless Nickel Plated Zinc
Pressure	870	Miniature, Potable	1/4" in. (6.4 mm)		X	X							X	X	150 psig (10 bar)	1.4-120 psig (0.1-8 bar)	14 SCFM (396 NL/min)	NSF Electrodeposited Chromium Plated Zinc
Pressure	3500	High Pressure					X						X		6000 psig (413 bar)	0-225 psig (0-15.5 bar)	4500 SCFH	Brass
Pressure	1227	Gas, High Flow, NACE							X	X	X		Sales Sheet Table 1		5-150 psig (0.4-10.3 bar)	Sales Sheet Table 2	LCC Steel	
Pressure	1230	Gas, Pressure Reducing, NACE								X	X	X	Sales Sheet Table 1		27-500 psig (1.9-34.5 bar)	Sales Sheet Table 4	LCC Steel	
Back Pressure	710	Sensitive, High Flow				X	X	X				X	X	250 psig (17 bar)	0-150 psig (0-10 bar)	50 SCFM (1,415 NL/min)	Aluminum Alloy	
Back Pressure	7200	Sensitive, High Flow						X	X	X			X				350 SCFM (9,905 NL/min)	Aluminum Alloy
Vacuum	480	Compact, Full Vacuum				X							N/A		0 to 30 inHg (-100 to -1.3 kPa)	1.67 SCFM (47 NL/min)		

Air Pressure Regulators

Type 90

Miniature Precision Air Pressure Regulator

Compact, lightweight, precise regulation



Ex RoHS

- High resolution set pressure adjustment
- Highly accurate air pressure regulation in a small package
- Pressure ranges up to 120 psig (8 bar)
- Compact and lightweight
- Available in NPT and BSP porting
- Two gauge ports and reversible bracket allow front or back mounting

Flow capacity SCFM (NL/min)	14 (420)
Exhaust Capacity SCFM (NL/min)	7 (210)
Sensitivity Inch wc (mm)	.25 (6.4)
Supply Pressure max. psig (bar)	150 (10)
Approximate Size (inches)	1.38x1.38x3.88
Approximate Size (mm)	35.1x35.1x98.5

Range psig (bar)	Port Size NPT/BSP	Model# NPT/BSP*
0.70-30 (0.05-2)	1/8"	90-AA
1.4-60 (0.1-4)	1/8"	90-AB
1.4-120 (0.1-8)	1/8"	90-AC
0.70-30 (0.05-2)	Manifold	90-XA
1.4-60 (0.1-4.0)	Manifold	90-XB
1.40-120 (0.1-8)	Manifold	90-XC

*For BSP porting add "U" to end of Model#

Type 100

Precision Air Pressure Regulator

Dependable, highly accurate pressure regulation to 0.1%



Ex RoHS

- Accurate pressure regulation
- Stable output
- Dependable startup
- High relief capacity
- Temperature stability
- Locking capability

Models

Type 100	Standard
Type 100HR	High Relief
Type 100EHR	Extra High Relief
Type 100LR	Low Range
Type 100PL	Plunger
Type 100B	Bottom Ported

Port Sizes NPT/BSP 1/8", 1/4", 3/8"

Output Ranges 0.5-25 psig (0.03-1.7 bar),
2-120 psig (0.14-8 bar),
2-40 psig (0.14-2.7 bar),
2-60 psig (0.14-4 bar)

Flow Capacity SCFM (NL/min) 14 (420)

Exhaust Capacity SCFM (NL/min) Type 100: 3 (90)
Type 100HR: 11 (330)
Type 100EHR: 15 (450)

Sensitivity Inch wc (mm) 0.125 (3.2)

Supply Pressure max. psig (bar) 150 (10)

Approximate Size (inches)

2.0 x 2.06 x 4.26

Approximate Size (mm)

52 x 52 x 108

Range psig (bar)	Port Size NPT/BSP	Model# NPT/BSP*
2-40 (0.14-2.7)	1/8"	100-AA
0.5-25 (0.03-1.7)	1/4"	120-BA
2-40 (0.14-2.7)	1/8"	100-AA
	1/4"	100-BA
	3/8"	100-CA
2-60 (0.14-4)	1/8"	100-AB
	1/4"	100-BB
	3/8"	100-CB
2-120 (0.14-8)	1/8"	100-AC
	1/4"	100-BC
	3/8"	100-CC

*For BSP porting add "U" to end of Model#

Type 100M

Motorized Precision Air Pressure Regulator

Precise pneumatic control by use of an electronic signal



RoHS

- Maintains settings during power failure
- Low power consumption
- No pre-regulation of supply pressure
- Mountable at any angle
- Adjustable mechanical stop limits
- Maximum output pressure
- Flexible range options
- Compact size

Models

100-MLR	Low Range
100-MHR	High Relief Capacity

Flow Capacity SCFM (NL/min)

14 (396)

Exhaust Capacity SCFM (NL/min)

Up to 10 (283)

Total Air Consumption SCFM (NL/min)

0.10 (2.83)

Supply Pressure max. psig (bar)

150 (10)

Motor Type: Reversible, synchronous motor with gear drive and slip clutch

Range psig (bar)	Approx. Time to Cover Full Range (seconds)	
	2RPM	6RPM
2-40 (0.14-2.8)	120	40
2-60 (0.14-4)	90	30
2-120 (0.14-8.3)	150	50
0.5-25 (0.03-1.7) L.R.		

Type 300

Air Filter Regulator

Clean, accurate instrument air pressure



Ex RoHS

- Provides clean, accurate air pressure
- Epoxy paint finish standard
- Stable output and repeatability
- High capacity, long lasting depth filter
- Low droop
- Low temperature option
- Filter only unit available

Filter	40 micron (5 micron option)
Flow Capacity SCFM (NL/min)	22 (660)
Exhaust Capacity SCFM (NL/min)	0.1 (3)
Sensitivity Inch wc (mm)	1.0 (25.0)
Supply Pressure max. psig (bar)	250 (17)

Range psig (bar)	Port Size NPT	Model#
0-10 (0-0.7)	1/4"	300-BD
0-30 (0-2)	1/4"	300-BA
0-60 (0-4)	1/4"	300-BB
0-120 (0-8)	1/4"	300-BC

Air Pressure Regulators

Type 310

NACE Air Pressure Filter Regulator

Instrument Air Filter Regulator



- Provides clean, accurate air pressure
- Epoxy paint finish standard
- Stable output and repeatability
- High capacity, long lasting depth filter
- Low droop
- Meets NACE MR-0175 requirements
- Low temperature option
- Filter only unit available



Flow Capacity SCFM (NL/min)	22 (660)
Exhaust Capacity SCFM (NL/min)	0.1 (3)
Sensitivity Inch wc (mm)	1.0 (25.0)
Supply Pressure max. psig (bar)	250 (17)

Range psig (bar)	Port Size NPT	Model#
0-10 (0-0.7)	1/4"	300-BD
0-30 (0-2)	1/4"	300-BA/310-BA
0-60 (0-4)	1/4"	300-BB/310-BB
0-100 (0-6.8)	1/4"	310-BC
N/A Filter only	1/4"	320-BX

Type 330/335/340

Instrument Air Filter Regulator & Regulator

Type 330 Filter Regulator | Type 335 NACE Filter Regulator | Type 340 Regulator



- Lightweight compact housing with epoxy paint withstands harsh environments
- 1/4", 1/2" NPT porting
- High flow capacity
- Direct, pipe or bracket mounting
- Tapped exhaust and panel mount options
- Second gauge port
- Low temperature option
- Automatic drain option
- Type 335 meets NACE MR-0175 requirements (available in 1/4" only)

Exhaust Capacity SCFM (NL/min)	0.1 (3)
Sensitivity Inch wc (mm)	1.0 (25.0)
Supply Pressure max. psig (bar)	250 (17)
Auto Drain: Supply Pressure max. psig (bar)	150 psig (10)
Cv Values:	1/4"NPT 0.5 at 150 psig supply and 80 psig setpoint 1/2"NPT 2.5 at 150 psig supply and 80 psig setpoint

Range psig (bar)	Port Size NPT	Filter Regulator Model #	NACE Filter Regulator Model #	Regulator Model #
0-30 (0-2)	1/4" 1/2"	330-BAB, 330-DAB	335-BAB	340-BA 340-DA
0-60 (0-4)	1/4" 1/2"	330-BBB, 330-DBB	335-BBB	340-BB 340-DB
0-100 (0-7)	1/4"		335-BCB	
0-120 (0-8)	1/4" 1/2"	330-BCB, 330-DCB		340-BC 340-DC



Type 350/360/370

Stainless Steel Regulators & Filter

350SS Stainless Steel Filter Regulator | 360SS Stainless Steel Regulator | 370SS Stainless Steel Filter



- Provides clean, accurate air pressure
 - Epoxy paint finish standard
 - Stable output and repeatability
 - High capacity, long lasting depth filter
 - Low droop
 - meets NACE MR-0175 requirements
 - Low temperature option
 - Filter only unit available
- Maximum Flow Capacity SCFM (NL/min)
 1/4" NPT 20 (600)
 1/2" NPT 160 (4,800)
- Exhaust Capacity SCFM (NL/min) 1.0 (30)
 Sensitivity Inch wc (mm) 1.0 (25.0)
 Supply Pressure max. psig (bar) 290 (20)



Type 350SS Stainless Steel Filter Regulator

Model	Part Number	Port Size (NPT)	Output Range psi bar
350-SS	350-BA	1/4"	0-30 0-2.1
350-SS	350-BB	1/4"	0-60 0-4.1
350-SS	350-BC	1/4"	0-100 0-6.9
350-SS	350-BD	1/4"	0-150 0-10.3
350-SS	350-DA	1/2"	0-30 0-2.1
350-SS	350-DB	1/2"	0-60 0-4.1
350-SS	350-DC	1/2"	0-100 0-6.9
350-SS	350-DD	1/2"	0-150 0-10.3

Type 360SS Stainless Steel Regulator

Model	Part Number	Port Size (NPT)	Output Range psi bar
360-SS	360-BA	1/4"	0-30 0-2.1
360-SS	360-BB	1/4"	0-60 0-4.1
360-SS	360-BC	1/4"	0-100 0-6.9
360-SS	360-BD	1/4"	0-150 0-10.3
360-SS	360-DA	1/2"	0-30 0-2.1
360-SS	360-DB	1/2"	0-60 0-4.1
360-SS	360-DC	1/2"	0-100 0-6.9
360-SS	360-DD	1/2"	0-150 0-10.3

Type 370SS Stainless Steel Filter

Model	Part Number	Port Size (NPT)
370-SS	370-BX	1/4"
370-SS	370-DX	1/2"

Type 380/390



RoHS

Stainless Steel Filter Regulator & Regulator

380 Large Flow Capacity Stainless Steel Filter Regulator | 390 Large Flow Capacity Stainless Steel Regulator

• All 316 stainless steel construction	• High flow capacity
• 3/4" & 1" NPT/BSP ported version	• NACE approved
Maximum Flow Coefficients (Cv)	• Autodrain option
3/4" NPT 6.0 1" NPT 7.0	• Tapped exhaust
Maximum Flow Capacity SCFM (NL/min)	
3/4" NPT 350 (9,905) 1" NPT 400 (11,320)	
Supply Pressure max.	290 psig (20 bar)
Operating Temperature	-40° to 200°F (-40° to 93°C)
Filter	25 micron or 5 micron filter
Weight Type 380	15 lbs (6.80 kg)
Type 390	13 lbs (5.90 kg)

Type 380 Stainless Steel Filter Regulator

Range psig (bar)	Port Size NPT	Model#
0-30 (0-2)	3/4", 1"	380-EA, 380-FA
0-60 (0-4)	3/4", 1"	380-EB, 380-FB
0-100 (0-7)	3/4", 1"	380-EC, 380-FC
0-150 (0-10)	3/4", 1"	380-ED, 380-FD
0-200 (0-14)	3/4", 1"	380-EE, 380-FE

Type 390 Stainless Steel Regulator

Range psig (bar)	Port Size NPT	Model#
0-30 (0-2)	3/4", 1"	390-EA, 390-FA
0-60 (0-4)	3/4", 1"	390-EB, 390-FB
0-100 (0-7)	3/4", 1"	390-EC, 390-FC
0-150 (0-10)	3/4", 1"	390-ED, 390-FD
0-200 (0-14)	3/4", 1"	390-EE, 390-FE

Type 3500/3600 Accurate and Reliable First-Cut Pressure Regulator

3500 High Pressure Regulator in Brass | 3600 High Pressure Regulator in 316 Stainless Steel



RoHS

- 6000 psi max. supply
- Repeatable pressure output
- Corrosion-resistant construction
- Supply Pressure max. psig (bar) 6000 (413)
- Temperature Range -70° to 225°F

- Low cost makes this unit ideal for high volume OEM applications

Range psig (bar)	Port Size NPT	Adjustment	Model#
0-125 (0-9)	1/4"	socket	3500-BC, 3600-BC
0-150 (0-10)	1/4"	socket	3500-BD, 3600-BD
0-225 (0-16)	1/4"	socket	3500-BE, 3600-BE
0-125 (0-9)	1/4"	Tee Handle	3500-CC, 3600-CC
0-150 (0-10)	1/4"	Tee Handle	3500-CD, 3600-CD
0-225 (0-16)	1/4"	Tee Handle	3500-CE, 3600-CE

Type 400

General Service Regulator

Low cost, high quality, corrosion resistant and compact pressure regulation



- 1/4" NPT porting
- Stable output and reliability
- Corrosion resistant
- Low droop at high flow levels

- High quality level
- Low cost makes this unit ideal for high volume OEM applications

Range psig (bar)	Port Size NPT	Model#
0-10 (0-0.7)	1/4"	400-BD
0-30 (0-2)	1/4"	400-BA
0-60 (0-4)	1/4"	400-BB
0-120 (0-8)	1/4"	400-BC

Flow Capacity SCFM (NL/min)	20 (600)
Exhaust Capacity SCFM (NL/min)	0.1 (3)
Sensitivity Inch wc (mm)	1.0 (25.0)
Supply Pressure max. psig (bar)	250 (17)

RoHS

Air Pressure Regulators

Type 480

Precision Vacuum Regulator

High quality, corrosion resistant and compact pressure regulation



- Compact size and low weight allow for in-line pipe mounting
- Soft valve design provides tight shut off and eliminates leakage in steady state operation
- Versatile full vacuum control
- Easy installation with multiple mounting options

Regulating Range	0 to 30 in.Hg (-1 to -0.013 bar)
Atmospheric Intake	.04 SCFM (1.1 NL/min)
Sensitivity	.5 in w.c. (0.0013 bar)
Ambient Temperature	32° to 140°F (0° to 60°C)
Weight	.93 lbs (.42 kg)
Port size (In and Out)	1/4 NPT
Port size (Gauge)	1/8 BSPT (Rc1/8)
Flow rate (max.)	3.5 SCFM (100 NL/min)

Range in.Hg (bar)	Port Size NPT	Model#
0-30 (-1 to -0.013)	1/4"	480V-BA

Type 700

Precision Pressure Regulator

High flow capacity and accurate pressure control



- Accurate pressure control
- 1/4", 3/8", 1/2" NPT/BSP porting
- Allows flow capacity up to 80 SCFM
- Dampening action of aspirator tube provides stability under varying flow conditions
- Sensitive to minute changes in downstream pressure



Flow Capacity SCFM (NL/min)	80 (2,400)
Exhaust Capacity SCFM (NL/min)	4 (120)
Sensitivity Inch wc (mm)	0.25 (6.4)
Supply Pressure max. psig (bar)	250 (17)
Approx. Size inches (mm)	DIA 3.0 (76) H 6.0 (152)

Range psig (bar)	Port Size NPT/BSP	Model# NPT/BSP*
0-2 (0-0.14)	1/4", 3/8", 1/2"	700-BA, 700-CA, 700-DA
0-15 (0-1)	1/4", 3/8", 1/2"	700-BC, 700-CC, 700-DC
0-30 (0-2)	1/4", 3/8", 1/2"	700-BD, 700-CD, 700-DD
0-60 (0-4)	1/4", 3/8", 1/2"	700-BE, 700-CE, 700-DE
0-150 (0-10)	1/4", 3/8", 1/2"	700-BF, 700-CF, 700-DF

*For BSP porting add "U" to end of Model#

Type 700BP

Precision Back Pressure Regulator

Reliable safety relief valve against over pressurization



- Sensitive protection against over pressurization in the downstream portion of a pneumatic system
- Operates as a high precision relief valve with an adjustable set point
- 1/4", 3/8", 1/2" NPT (1/4", 1/2" BSP) porting



Flow Capacity SCFM (NL/min)	50 (1,500)
Exhaust Capacity SCFM (NL/min)	4 (120)
Sensitivity Inch wc (mm)	0.25 (6.4)
Supply Pressure max. psig (bar)	250 (17)

Range psig (bar)	Port Size NPT/BSP	Model# NPT/BSP*
0-2 (0-0.14)	1/4", 3/8", 1/2"	710-BA, 710-CA, 710-DA
0-15 (0-1)	1/4", 3/8", 1/2"	710-BC, 710-CC, 710-DC
0-30 (0-2)	1/4", 3/8", 1/2"	710-BD, 710-CD, 710-DD
0-60 (0-4)	1/4", 3/8", 1/2"	710-BE, 710-CE, 710-DE
0-150 (0-10)	1/4", 3/8", 1/2"	710-BF, 710-CF, 710-DF

*For BSP porting add "U" to end of Model#. BSP porting for 1/4" and 1/2" only.

Air Pressure Regulators

Type 7000

Precision Air Pressure Regulator

For applications that require high flow capacity



Ex EAC RoHS

- 1/4", 1/2", 3/4" NPT porting
- Two 1/4" NPT gauge ports
- High forward and exhaust flow
- Low droop and precise adjustment
- Multiple port options
- Balanced supply valve

Maximum Flow Coefficients (Cv)	Port NPT	Forward	Exhaust
3/4"	5.0	3.5	
1/2"	4.5	3.5	
1/4"	2.0	2.5	
Exhaust Capacity SCFM (NL/min)	3/4"	80 (2,264)	
	1/2"	75 (2,123)	
	1/4"	35 (991)	
Sensitivity Inch wc (mm)	0.25 (6.4)		
Effect of Supply Pressure Variation on Output	<0.3 psi (.007 bar) for 100 psi (6.7 bar) change		
Air Consumption	<12 SCFH at 200 psig output		
Supply Pressure max.	250 psig (17.5bar)		

Range psig (bar)	Port Size NPT	Model#
0-2 (0-0.15)	1/4", 1/2", 3/4"	7000-BA, 7000-DA, 7000-EA
0-10 (0-0.69)	1/4", 1/2", 3/4"	7000-BB, 7000-DB, 7000-EB
0-30 (0-2.0)	1/4", 1/2", 3/4"	7000-BC, 7000-DC, 7000-EC
0-60 (0-4.0)	1/4", 1/2", 3/4"	7000-BD, 7000-DD, 7000-ED
0-100 (0-7)	1/4", 1/2", 3/4"	7000-BE, 7000-DE, 7000-EE
0-100 (0-7)	1/4", 1/2", 3/4"	7000-BF, 7000-DF, 7000-FF
0-150 (0-10)	1/4", 1/2", 3/4"	7000-BG, 7000-DG, 7000-EG
0-200 (0-13.8)	1/4", 1/2", 3/4"	7000-BH, 7000-DH, 7000-EG

Type 7100

Precision Air Pressure Regulator

Superior accuracy and stability with high forward and reverse flow capacity



- 1/4", 1/2", or 3/4" NPT porting
- High flow forward allows flows up to 250 SCFM
- High exhaust capacity allows relief flow up to 80 SCFM
- Balanced supply valve virtually eliminates changes to supply pressure variation
- Sensitivity to within 1/4" water column pressure
- Stable output - isolated control chamber prevents output variation under varying conditions of flow, supply pressure, and temperature
- Two 1/4" NPT gauge ports

Ex EAC RoHS

Supply Pressure max.	250 psi (17 bar)		
Air Consumption max.	6 SCFH (3 NL/min)		
Port	Forward	Exhaust	
Maximum Flow Coefficients (Cv)	3/4"	5.0	3.5
	1/2"	4.5	3.5
	1/4"	2.0	2.5
Exhaust Capacity SCFM (NL/min)	3/4"	80 (2,264)	
	1/2"	75 (2,123)	
	1/4"	35 (991)	
Range psig (bar)	Port Size NPT	Model#	
2-40 (0.14-2.7)	1/4", 1/2", 3/4"	7100-BA, 7100-DA, 7100-EA	
2-60 (0.14-4.1)	1/4", 1/2", 3/4"	7100-BB, 7100-DB, 7100-EB	
2-120 (0.14-8.2)	1/4", 1/2", 3/4"	7100-BC, 7100-DC, 7100-EC	

Type 7200BP Precision Back Pressure Regulator

For applications that require high relief capacity



- 1/4", 1/2", or 3/4" NPT porting
- Two 1/4" NPT gauge ports
- Large relief valve allows flows up to 350 SCFM.
- Sensitive - reacts to pressure deviations to within 1/2" water column pressure.
- Stable performance - isolated control chamber prevents hunting and vibration during flow conditions

Ex EAC RoHS

Supply Pressure max.	250 psi (17 bar)		
Air Consumption max.	6 SCFH (3 NL/min)		
Port	Forward	Exhaust	
Maximum Flow Coefficients (Cv)	3/4"	5.0	3.5
	1/2"	4.5	3.5
	1/4"	2.0	2.5
Exhaust Capacity SCFM (NL/min)	3/4"	80 (2,264)	
	1/2"	75 (2,123)	
	1/4"	35 (991)	
Range psig (bar)	Port Size NPT	Model#	
0-2 (0-0.15)	1/4", 1/2", 3/4"	7200-BA, 7200-DA, 7200-EA	
0-10 (0-0.69)	1/4", 1/2", 3/4"	7200-BB, 7200-DB, 7200-EB	
0-30 (0-2.0)	1/4", 1/2", 3/4"	7200-BC, 7200-DC, 7200-EC	
0-60 (0-4.0)	1/4", 1/2", 3/4"	7200-BD, 7200-DD, 7200-ED	
0-100 (0-7)	1/4", 1/2", 3/4"	7200-BE, 7200-DE, 7200-EE	
0-100 (0-7)	1/4", 1/2", 3/4"	7200-BF, 7200-DF, 7200-FF	

Type 800

Subminiature Precision Pressure Regulator

Precise air pressure regulation for application where space is limited



- Compact unit
- Flow capacity up to 5 SCFM
- Stable/repeatable
- Lightweight construction
- Available with threaded post/manifold mounting

Ex EAC RoHS

Flow Capacity SCFM (NL/min)	5 (150)
Exhaust Capacity SCFM (NL/min)	0.4 (12)
Supply Pressure max. psig (bar)	250 (17)
Approx. Size inches (mm)	DIA 1.0 (24.5) H 3.4 (86.4)

Range psig (bar)	1/16 NPT	Port Size 10-32	M5
0-5 (0-0.4)	800-AA	800-CA	800-BA
0-15 (0-1)	800-AB	800-CB	800-BB
0-30 (0-2)	800-AC	800-CC	800-BC
0-60 (0-4)	800-AD	800-CD	800-BD
0-100 (0-7)	800-AE	800-CE	800-BE

Air Pressure Regulators

Type 850/860/870

Minature Air/Water/Potable Water Pressure Regulator

850 Air Pressure Regulator | 860 Water Pressure Regulator | 870 Potable Water Pressure Regulator



- Stable (air/water/potable water) pressure
- Small, economical package.
- Relieving and non-relieving models
- Non-rising adjustment knob with locking capability
- Lightweight construction
- OEM friendly cost
- 1/8" and 1/4" NPT/BSP porting
- Food grade compliant (870 only)

Flow Capacity SCFM (NL/min)	5 (150)
Exhaust Capacity SCFM (NL/min)	0.4 (12)
Supply Pressure max. psig (bar)	250 (17)
Approx. Size inches (mm)	DIA 1.0 (24.5) H 3.4 (86.4)

Range psig (bar)	Port Size		
	1/16 NPT	10-32	M5
0-5 (0-0.4)	800-AA	800-CA	800-BA
0-15 (0-1)	800-AB	800-CB	800-BB
0-30 (0-2)	800-AC	800-CC	800-BC
0-60 (0-4)	800-AD	800-CD	800-BD
0-100 (0-7)	800-AE	800-CE	800-BE

Type FA12

Filter Regulator/Coalescing Filter Combo

Oil-free air for critical applications



- 1/8" or 1/4" NPT porting
- Compact combo design
- Provides oil free air for critical applications
- Integral mounting bracket and set-point locking knob
- Clear bowl for at a glance monitoring
- Field replaceable filters
- Manual or automatic drain

Operating Pressure	7-140 psig (0.5-10 bar)
Supply Pressure	150 psig (10.5 bar)
Temperature Limits	23° to 140°F (-5° to 60°C) (Non-freezing)
Flow Capacities	1/8" Port - Reg. 35 SCFM (1,000 nl/m) 1/4" Port - Reg. 46 SCFM (1,300 nl/m)
Drain Capacities	1/8" Port - 0.51 oz (15 cm³) 1/4" Port - 1.28 oz (38 cm³)
Filtration (micron)	Regulator: 5 Filter: 0.3 or 0.01
Mounting	Bracket (Integral)
Supply/Output Port	1/8 or 1/4" NPT
Gauge Port	1/8" NPT
Weight	0.80 oz (0.36kg)

Port Size (NPT)	Filter	Model#
1/8"	5 micron/0.3 micron	FA12-AB
1/8"	5 micron/0.01 micron	FA12-AC
1/4"	5 micron/0.3 micron	FA12-BB
1/4"	5 micron/0.01 micron	FA12-BC

Type 1227

High Flow Gas Pressure Regulator

Reliable pressure control for the oil and gas industry



- Wide range of orifice sizes
- 1" or 2" body size
- Tamper-proof cap
- Trim can be replaced without disconnecting regulator from the system
- Multiple orientations
- Superior sensitivity
- NACE MR0175 construction available
- Assembled and tested in the USA

Body Sizes	1" or 2" NPT
Output Ranges psi (bar)	5-20 (0.4-1.4), 15-40 (1.0-2.8), 10-95 (0.7-6.4), 35-80 (2.4-5.5), 70-150 (4.8-10.3)
Body Inlet Pressure Rating	LCC Steel - 2,000 psi (138 bar)

Spring Range psig (bar)	3/32"	1/8"	3/16"	1/4"	3/8"	1/2"
5-20 (0.3-1.4)	1227X-X*CA	1227X-X*CB	1227X-X*CC	1227X-X*CD	1227X-X*CE	1227X-X*CF
15-40 (1.2-8)	1227X-X*DA	1227X-X*DB	1227X-X*DC	1227X-X*DD	1227X-X*DE	1227X-X*DF
35-80 (2.4)	1227X-X*EA	1227X-X*EB	1227X-X*EC	1227X-X*ED	1227X-X*EE	1227X-X*EF
10-95 (0.7-6.4)	1227X-X*FA	1227X-X*FB	1227X-X*FC	1227X-X*FD	1227X-X*FE	1227X-X*FF
70-150 (4.8-10.3)	1227X-X*GA	1227X-X*GB	1227X-X*GC	1227X-X*GD	1227X-X*GE	1227X-X*GF

X-X* See catalog to select Versions and Port Sizes

Type 1230

High Flow Gas Pressure Regulator

Reliable pressure control with wide pressure ranges and valve disk material



- Wide range of orifice sizes
- 1" or 2" body size
- Remote sensing
- Tamper-proof cap
- Trim can be replaced without disconnecting regulator from the system
- Multiple orientations
- Internal relief option
- NACE MR0175 construction available
- Assembled and tested in the USA

Body Sizes	1" or 2" NPT
Vent Size	1/4" NPT
Output Ranges psi (bar)	27-50 (1.9-3.5), 46-95 (3.2-6.6), 90-150 (6.2-10.3), 150-200 (10.3-13.8), 200-275 (13.8-19), 275-500 (19-34.5)

Spring Range psig (bar)	1/8"	3/16"	1/4"	3/8"	1/2"
27-50 (1.9-3.5)	1230X-X*DB	1230X-X*DC	1230X-X*DD	1230X-X*DE	1230X-X*DF
46-95 (3.2-6.6)	1230X-X*EB	1230X-X*EC	1230X-X*ED	1230X-X*EE	1230X-X*EF
90-150 (6.2-10.3)	1230X-X*FB	1230X-X*FC	1230X-X*FD	1230X-X*FE	1230X-X*FF
150-200 (10.3-13.8)	1230X-X*GB	1230X-X*GC	1230X-X*GD	1230X-X*GE	1230X-X*GF
200-275 (13.8-19)	1230X-X*HB	1230X-X*HC	1230X-X*HD	1230X-X*HE	1230X-X*HF
275-500 (19-34.5)	1230X-X*IB	1230X-X*IC	1230X-X*ID	1230X-X*IE	1230X-X*IF

X-X* See catalog to select Versions and Port Sizes

Type 320

Air Filter

40-micron depth filter that removes dirt, moisture and other particles from air and gas lines



RoHS

- 1/4" ports
- 5 micron filter option
- Stainless steel trim option

Port Size NPT

1/4"

Model#

320-BX

Port Size	1/4" NPT
Flow Capacity (at 100 psig; 20 psig outlet)	20 SCFM (566 NL/min)
Max. Supply Pressure	250 psig (17 bar)
Ambient Temperature Limits	-20° to 160°F (-29° to 71°C), -62° to 194°F (-52° to 90°C)
Cv	0.4
Mounting	Pipe, Through Body, Bracker
Filter	40 micron, 5 micron
Weight	1.3 lb (0.59 kg)

Type 345

Air Filter

Rugged and reliable instrument air filtration



RoHS

- 1/4" and 1/2" port sizes
- 40 or 5 micron filter
- Autodrain capabilities
- Low temperature option: down to -62°F

Port Size NPT

1/4"

Model#

345-BX

1/2"

345-DX

Port Size	1/2" NPT, 1/4" NPT
Max. Supply Pressure	150 psig (10 bar), 250 psig (17 bar)
Max. Flow Capacity- 1/2" Ports	200 SCFM (5, 660 NL/min)
Max. Flow Capacity- 1/4" Ports	80 SCFM (2, 264 NL/min)
Ambient Temperature Limits	-62° to 194°F (-52° to 90°C), 0° to 160°F (-18° to 71°C), 32° to 160°F (0° to 71°C)
Filter	5 micron, 40 micron
Cv Value	0.5, 2.5
Mounting	Pipe, Bracket, Through Body
Operating Media	Air, Inert Gas, Sweet Natural Gas
Weight	1.0 lb (0.4 kg), 1.5 lbs (0.68 kg)

Type 370

Stainless Steel Filter

Provides clean and reliable air flow under severe conditions



- 1/4" and 1/2" ports
- Autodrain option
- Low temperature option: down to -61°F (-52 °C)
- High flow capacity: up to 150 SCFM

Port Size NPT

1/4"

Model#

370-BX

1/2"

370-DX

RoHS

Port Size	1/2" NPT, 1/4" NPT
Max. Supply Pressure	150 psig (10 bar)
Max. Flow Capacity- 1/2" Ports	150 SCFM (4, 247 NL/min)
Max. Flow Capacity- 1/4" Ports	50 SCFM (1415 NL/min)
Filter	5 micron, 25 micron
Ambient Temperature Limits	-20° to 185°F (-29° to 85°C), 32° to 160°F (0° to 71°C), -61° to 194°F (-52° to 90°C)
Cv Value 1/4", 1/2"	1.2, 3.3
Mounting	Pipe
Operating Media	Air, Inert Gas, Sweet Natural Gas, Sour Gases
Weight	2.1 lbs (0.95 kg), 2.5 lbs (1.14 kg)

Type FA10

Coalescing Filter

Superior filtration with high flow and minimal pressure drop



- 1/8", 1/4" or 1/2" NPT porting
- Removes liquid aerosols and sub-micron particles - liquids gravitate to the bottom of the element and will not re-enter the airstream
- Oil-free air for critical applications, such as air gauging and pneumatic instrumentation and controls.
- Low pressure drop
- Manual or automatic drain
- Clear or metal bowl

Port Size (NPT)

1/8" 0.3 micron

Model#

FA10-AB

1/8" 0.01 micron

FA10-AC

1/4" 0.3 micron

FA10-BB

1/4" 0.01 micron

FA10-BC

1/2" 0.3 micron

FA10-DB

1/2" 0.01 micron

FA10-DC

Operating Pressure Max.	150 psig (10 bar)
Proof Pressure	200 psig (15 bar)
Port Sizes	1/8" NPT, 1/4" NPT, 1/2" NPT
Flow Capacities	1/8" - 7 SCFM (200 l/m), 1/4" - 16 SCFM (450 l/m), 1/2" - 39 SCFM (1100 l/m)
Drain Capacities	1/8" - 0.51 oz (15 cm³), 1/4" - 1.28 oz (39 cm³), 1/2" 1.89 oz (56 cm³)
Filtration	0.03 micron, 0.01 micron
Mounting	in-line, bracket
Weight	1/8" - 0.31 oz (0.14 kg), 1/4" - 0.53 oz (0.24 kg), 1/2" - 1.1 oz (0.5 kg)



Transducers

Transducer Groups	Model Series	Explosion-Proof	Intrinsically Safe	Input mA	Input Vdc	Agency	Input Ranges	Min. Output Range	Max. Output Range	Max. Supply Pressure	Max. Flow Capacity	Port Size			
												3/16" NPT	1/8" NPT	1/4" NPT	1/2" Electric Manifold
I/P; E/P	Type 500		X	X	X	FM	0-10Vdc, 0-5Vdc, 0-60mA, 1-9Vdc, 10-50mA, 4-20mA	1-17 psig (0.1-1.2 bar)	1-4-120 psig (0.1-8 bar)	150 psig (10 bar)	14 SCFM (396 NL/min)		X	X	
I/P; E/P	Type 550			X	X	FM/CSA/ATEX	0-10Vdc, 0-5Vdc, 1-5Vdc, 1-9Vdc, 4-20mA	0-30 psig (0-2 bar)	0-120 psig (0-8 bar)	150 psig (10 bar)	20 SCFM (566 NL/min)		X	X	
I/P; E/P	Type 900	X	X			FM/CSA/ATEX	0-10Vdc, 0-5Vdc, 1-5Vdc, 1-9Vdc, 4-20mA	0-15 psig (0-1 bar)	2-100 psig (0.14-6.9 bar)	105-130 psig (7.2-9 bar)	20 SCFM (566 NL/min)		X	X	
I/P	Type 590		X	X		FM/CSA/ATEX	4-20mA	3-15 psig (0.20-1.0 bar)	6-30 psig (0.40-2.0 bar)	42 psig (2.8 bar)	2.4 SCFM (67.92 NL/min)		X		
I/P	Type 590M		X	X		FM/CSA/ATEX	4-20mA	3-15 psig (0.20-1.0 bar)	6-30 psig (0.40-2.0 bar)	150 psig (10 bar)	8.36 SCFH (4.18 NL/min)				X
I/P	Type 595	X	X	X		FM/CSA/ATEX	4-20mA	3-15 psig (0.20-1.0 bar)	6-30 psig (0.40-2.0 bar)	150 psig (10 bar)	2.4 SCFM (67.92 NL/min)		X	X	
I/P	Type 950	X	X	X		FM/CSA/ATEX	4-20mA	3-15 psig (0.20-1.0 bar)	0-33 psig (0-2.2 bar)	100 psig (7 bar)	12 SCFM (340 NL/min)		X	X	X
I/P	I/PAC	X	X	X	X	FM/CSA/ATEX	4-20mA	3-15 psig (0.20-1.0 bar)	0-33 psig (0-2.2 bar)	100 psig (7 bar)	12 SCFM (340 NL/min)		X		

Intrinsically Safe I/P, E/P Transducers

Type 500

Electropneumatic I/P Transducer (I/P, E/P)

Economical and reliable electrical conversion to pressure



- Output pressure from 3-15 psig to 3-120 psig
- NEMA-4X (IP65) enclosure (optional)
- Integral volume booster
- Agency approvals
- Field reversible
- Easy span and zero adjustment

	Standard Pressure	High Pressure
Flow Capacity SCFM (NL/min)	12.0 (360)	20 (600)
Terminal Based Linearity (% of span)	±0.75	±1.5
Repeatability (% of span)	<0.5	
Supply Pressure max. psig (bar)	100 (7)	150 (10)
Port Size (Pneumatic)	1/4 NPT, 1/4 BSP	
Port Size (Electric)	1/2 NPT	
Approx. Size (inches)	2.18 x 2.18 x 4.24	
Approx. Size (mm)	55.4 x 55.4 x 107.7	

Input Signal	Output Range PSI (bar)	Model# NPT/BSP*
4-20 mA	3-15 (0.2-1)	500-AC
4-20 mA	3-27 (0.2-1.8)	500-AD
4-20 mA	6-30 (0.4-2)	500-AE
4-20 mA	1-17 (0.07-1.2)	500-AF
10-50 mA	3-15 (0.2-1)	500-BC
10-50 mA	3-27 (0.2-1.8)	500-BD
10-50 mA	6-30 (0.4-2)	500-BE
0-5 Vdc	3-15 (0.2-1)	500-CC
0-5 Vdc	3-27 (0.2-1.8)	500-CD
0-5 Vdc	6-30 (0.4-2)	500-CE
1-9 Vdc	3-15 (0.2-1)	500-DC
1-9 Vdc	3-27 (0.2-1.8)	500-DD
1-9 Vdc	6-30 (0.4-2)	500-DE
4-20 mA	2-60 (0.14-4)	500-AG
4-20 mA	3-120 (0.2-8)	500-AH
0-60 mA	2-120 (0.14-8)	500-BF
0-5 V	2-60 (0.14-4)	500-CF
0-10 V	3-120 (0.2-8)	500-EH

*For BSP porting add "U" to end of Model#

Type 550X I/P, E/P Transducer

Accurate and economical miniature electronic pressure regulator



- Compact size, accessible porting and easy adjustments for limited spaces
- DIN 43650, M12, terminal block or conduit electrical connections
- DIN rail, manifold, pipe, wall or panel mounting available
- NEMA-4X(IP65) housing
- Zero based and high pressure versions
- Intrinsically safe certifications

	High Pressure	Zero Based
Inputs	4-20 mA, 0-5 Vdc, 0-10 Vdc, 1-9 Vdc	
Flow Capacity SCFM (NL/min)	12.0 (360)	20 (600)
Linearity (Independent) % of span	<±0.5	<±1.0
Repeatability % of span	<0.5	<1.0
Supply Pressure max. psig (bar)	100 (7)	150 (1050)
Port Size (Pneumatic)	1/4 NPT, 1/4 BSP	
Approx. Size (inches)	1.5 x 2.2 x 3.7	1.5 x 2.2 x 5.1
Approx. Size (mm)	38.1x 55.4x93.7	1.5 x 2.2 x 5.1

Input Signal	Output Range PSI (bar)	Model# NPT/BSP*
4-20 mA	3-15 (0.2-1)	550-ACA
4-20 mA	3-27 (0.2-1.8)	550-ADA
4-20 mA	6-30 (0.4-2)	550-AEA
4-20 mA	2-60 (0)	550-AGA
4-20 mA	3-120 (0)	550-AHA
0-10 Vdc	2-60 (0)	550-EGA
010 Vdc	3-120 (0)	550-EHA
4-20 mA	0-30 (0)	550-AIA
4-20 mA	0-60 (0)	550-AJA
4-20 mA	0-120 (0)	550-AKA
0-10 Vdc	0-30 (0)	550-EIA
010 Vdc	0-60 (0)	550-EJA
010 Vdc	0-120 (0)	550-EKA

*For BSP porting add "U" to end of Model#

Type 590X I/P Transducer

Compact size, vibration-insensitive, electronic, pressure regulator



- Accurate pressure control at an economical cost
- Vibration and position insensitive
- Din rail and manifold mounting
- Manifold or 1/8" NPT porting available
- Wide operating temperature limits
- Worldwide safety approvals



Terminal Based Linearity (% of span)	±0.5
Supply Pressure max. psig (bar)	Manifold (M) 1/8" NPT (P) 3-15: 22 (1.5) 3-27, 6-30: 42 (2.8)

Approx. Size (inches)	3.3 x 1.4 x 2.0
Approx. Size (mm)	84.9 x 36.1 x 53.1

Input Signal	Output Range PSI (bar)	Connection	Model#
4-20 mA	3-15 (0.2-1)	Manifold	590-ACM
4-20 mA	3-27 (0.2-1.8)	Manifold	590-ADM
4-20 mA	6-30 (0.4-2)	Manifold	590-AEM
4-20 mA	3-15 (0.2-1)	1/8" NPT	590-ACP
4-20 mA	3-27 (0.2-1.8)	1/8" NPT	590-ADP
4-20 mA	6-30 (0.4-2)	1/8" NPT	590-AEP

Explosion-Proof Transducers

Type 900X

Miniature I/P, E/P Transducer

Compact electronic pressure regulator self corrects to maintain precise control



- Shock, vibration and position insensitive
- High accuracy
- Noninteractive zero and span
- Wall, panel, pipe, DIN rail (optional) or manifold mounting
- DIN 43650, terminal block or conduit electrical connections
- NEMA-4X(IP65) Enclosure
- Supply pressures up to 130 psig
- Built-in volume booster
- Direct / reverse acting, full/split range

Inputs	4-20 mA, 0-5 Vdc, 1-9 Vdc, 0-10 Vdc, 1-5 Vdc
Flow Capacity SCFM (NL/min)	12.0 (360)
Terminal Based Linearity (% of span)	±0.10
Repeatability (% of span)	<0.10
Supply Pressure max. psig (bar)	100 (7)
Port Size (Pneumatic)	1/4 NPT, 1/4 BSP
Port Size (Electric)	1/2 NPT
Approx. Size (inches)	1.5 x 2.2 x 3.7
Approx. Size (mm)	38.1 x 55.9 x 93.7



Input Signal	Output Range PSI (bar)	Model# NPT/BSP*
4-20 mA	3-15 (0.20-1.00)	900-ACA
4-20 mA	3-27 (0.2-1.9)	900-ADA
4-20 mA	6-30 (0.4-2.1)	900-AEA
4-20 mA	1-17 (0.07-1.2)	900-AFA
0-10 Vdc	3-15 (0.20-1.00)	900-ECA
0-10 Vdc	3-27 (0.2-1.9)	900-EDA
0-10 Vdc	6-30 (0.4-2.1)	900-EEA
0-10 Vdc	1-17 (0.07-1.2)	900-EFA

Also Available	High Output	Zero Based
Inputs	4-20 mA, 0-10 Vdc, 1-9 Vdc, 0-5 Vdc, 1-5 Vdc	4-20 mA, 0-10 Vdc, 0-5 Vdc, 1-5 Vdc, 1-5 Vdc
Outputs psig (bar)	2-60 (0.14-4), 2-100 (0.14-6.9)	0-15 (0-1.0), 0-30 (0-2.1), 0-60 (0-4.1)
Supply Pressure psig (bar)	65-130 (4.5-9), 105-130 (7.2-9)	25-65 (1.7-4.5), 40-70 (2.75-4.8), 70-80 (4.8-5.5)
Air Consumption at mid range typical	4.5 SCFH (2.25 NL/min)	1.5 SCFH (0.75 NL/min) 4.5 SCFH (2.25 NL/min)
Flow Capacity at 130 psig (9.0 bar) supply	20 SCFM (566 NL/min)	4.5 SCFM (127 NL/min) 20 SCFM (566 NL/min)

Input Signal	Output Range PSI (bar)	Model# NPT/BSP*
4-20 mA	2-60 (0.14-4)	900-AGA
4-20 mA	2-100 (0.14-7)	900-AHA
0-10 Vdc	2-60 (0.14-4)	900-EGA
0-10 Vdc	2-100 (0.14-7)	900-EHA
4-20 mA	0-15 (0-1)	900-ALA
4-20 mA	0-30 (0-2.1)	900-AIA
4-20 mA	0-60 (0-4.1)	900-AJA
0-10 Vdc	0-15 (0-1)	900-ELA
0-10 Vdc	0-30 (0-2.1)	900-EIA
0-10 Vdc	0-60 (0-4.1)	900-EJA

*For BSP porting add "U" to end of Model#

Type 595XP

Explosion-Proof I/P Transducer

High level of regulation accuracy and repeatability for the operation of actuated valves



- Compact design
- Worldwide safety approvals
- Vibration and position insensitive
- Low power consumption

Input Signal	Output Range PSI (bar)	Model# NPT/BSP
4-20 mA	3-15 (0.2-1)	595-AC
4-20 mA	3-27 (0.2-1.8)	595-AD
4-20 mA	6-30 (0.4-2)	595-AC

Flow Capacity SCFM (NL/min)	2.4 (72)
Terminal Based Linearity (% of span)	±0.5
Repeatability (% of span)	<0.3
Supply Pressure max. psig (bar)	42 (2.8)
Port Size (Pneumatic)	1/4 NPT
Port Size (Electric)	1/2 NPT
Approx. Size (inches)	DIA 2.90 H 5.16
Approx. Size (mm)	DIA 73.7 H 131.0



Type 950XP

Explosion-Proof I/P Transducer

Process reliable and field rugged electronic pressure regulator



- Compact design
- Explosion-proof NEMA-4X (IP65) enclosure
- RFI, EMI protected
- Shock, vibration and position insensitive.
- Field-selectable outputs (optional)
- Highly tolerant of impure air
- Optional tapped exhaust and conduit seal required for FM/CSA approval when using natural gas (sweet) or methane



Flow Capacity SCFM (NL/min)	12.0 (360)
Terminal Based Linearity (% of span)	±0.10
Repeatability (% of span)	<0.10
Supply Pressure max. psig (bar)	100 (7)
Port Size (Pneumatic)	1/4 NPT
Port Size (Electric)	1/2 NPT
Approximate Size (inches)	DIA 3.50 H 4.60
Approximate Size (mm)	DIA 88.9 H 116.6

Input Signal	Output Range PSI (bar)	Model# NPT
4-20 mA	3-15 (0.2-1)	950-AC
4-20 mA	3-27 (0.2-1.8)	950-AD
4-20 mA	6-30 (0.4-2)	950-AE
4-20 mA	0-33 (0-2.2)	950-AF
4-20 mA	Field Selectable	950-ACA



P/I Transducers

P200/P290

Pneumatic-to-Current P/I Transducer

Explosion-proof housing allows it to stand up to the most hazardous and demanding applications



RoHS

- ±0.10%accuracy
- Non-interactive calibration
- Transient, over-current and reverse polarity protection
- RFI immune

Input Signal PSI (bar)	Output Range	Model#
3-15 (0.2-1)	4-20 mA	P200 + P11
3-27 (0.2-1.8)	4-20 mA	P200 + P12
6-30 (0.4-2)	4-20 mA	P200 + P13
3-15 (0.2-1)	4-20 mA	P290M + P11
3-27 (0.2-1.8)	4-20 mA	P290M + P12
6-30 (0.4-2)	4-20 mA	P290M + P13

Inputs	3-15 psig (0.2-1.0 bar), 3-27 psig (0.2-1.8 bar) 6-30 psig (0.4-2.0 bar)
Maximum Input	3 times full scale without recalibration 4 times full scale without failure
Outputs	P200: 2 wire: 4-20 mA and 10-50 mA P290M: 2 wire: 4-20 mA, with over-current limit with over-current limit
Allowable Loads	P200: 700 Ω P290M: 700 Ω, standard (24 VDC Power)
Accuracy	± 0.15% of span guaranteed; ± 0.10% of span typical
Response Time	10 m Sec to 99% of step change
Temperature Stability	Span and Zero: ± 0.007% of span per °F maximum deviation from 77°F calibration
Power Supply Stability	Less than 0.005% of span change in output per volt change at the input terminals
RFI/EMI Effect	Meets or exceeds SAMA PMC 33.1, 1978, 2-abc: 0.1% of span at 10 volts/meter
Operating Temperature Range	-40°F to 161°F (-40°C to 72°C) -40°F to 167°F (-40°C to 75°C)
Storage Temperature Range	-60°F to 161°F (-51°C to 72°C) -60°F to 185°F (-51°C to 85°C)
In-process Output Monitoring	Current: For accurate reading, ammeter must have less than 20 Ω input resistance on 4-20 mA output (0.40 VDC drop)
Connections	P290: Signal Air - 1/4" NPT female Electrical Wiring - 1/2" NPT female to barrier terminal strip P290M: Signal Air - 1/8" NPT female Electrical Wiring - Miniature terminal block accepts solid or stranded wire up to 14 AWG

Integrated Process Control

I/PAC

Integrated Process Air Control

Pre-Assembled Explosion-Proof I/P Transducer with filter regulator and pressure gauge



RoHS

- Seamless replacements for existing automated control valves in the field
- Convenient bracketing allows direct or 2" pipe mounting



- Units come preassembled with filter regulator and pressure gauge.
- Explosion-proof and intrinsically safe approvals from FM, CSA and ATEX

Input	4-20 mA
Output Range	0-33 psig (0-2.2 bar), 3-15 psig (0.2-1 bar), 3-27 psig (0.2-1.8 bar), 6-30 psig (0.4-2 bar)
Max. Supply Pressure	100 psig (7 bar)
Air Consumption	3.0 SCFH (1.5 NL/min)
Flow Capacity	12 SCFM (340 NL/min)
Housing	NEMA 4X (IP 65)
Media	Clean, dry, oil-free, instrument air, filtered to 40 micron
Input Signal	Output Range PSI (bar)
4-20 mA	3-15 (0.2-1)
4-20 mA	3-27 (0.2-1.8)
4-20 mA	6-30 (0.4-2)
4-20 mA	3-15 (0.2-1)
4-20 mA	3-27 (0.2-1.8)
4-20 mA	6-30 (0.4-2)

Manifold

Type 925

Multi-function Supply Manifold

A common supply port with individual shut-off valves



- Common supply port for the Type 550 or Type 900X I/P, E/P
- One supply line for multiple outlets
- Patented individual shut-off valve
- DIN rail mountable
- Adaptable to provide common output for solenoid valves

Connections - Supply Port	1/2 NPT
Connections - Input Stations	1/4" NPT
Number of Mountable Units	3, 5, 10, 15
Temperature Range	-4° to 190°F (-20° to 90°C)
Max. Supply Pressure	250 psig (16 bar)
Description	Model#
3 Unit Manifold Kit	438-544-005
5 Unit Manifold Kit	438-544-006
10 Unit Manifold Kit	438-544-007
15 Unit Manifold Kit	438-544-008

Kit includes manifold, mounting brackets (2), end cap, 1/2" NPT inlet fitting

Volume Boosters

Type 600

Volume Booster

Ratio relay flow booster



RoHS

- Signal pressure produces an output pressure with high flow capacity
- 1/4", 3/8", 1/2" NPT/BST porting
- Flow capacity to 50 SCFM
- Available with 1:1, 1:2, 1:3 or 1:6 signal to output ratio
- High relief capacity
- Negative bias option available

Flow Capacity SCFM (NL/min)	50 (1,500)	
Exhaust Capacity SCFM (NL/min)	15.0 (450)	
Sensitivity Inch wc (mm)	0.25 (6.4)	
Supply Pressure max. psig (bar)	250 (17)	
Output Pressure Range psig (bar)	0-150 (0-10)	
Approximate Size (inches)	DIA 3.0 H 3.5	
Approximate Size (mm)	DIA 76 H 85	
Port Size NPT/BSP	Signal/Output Ratio	Model# NPT/BSP*
1/4", 3/8", 1/2"	1:1	600-BA, 600-CA, 600-DA
1/4", 3/8", 1/2"	1:2	600-BB, 600-CB, 600-DB
1/4", 3/8", 1/2"	1:3	600-BC, 600-CC, 600-DC
1/4", 3/8", 1/2"	1:6	600-BD, 600-CD, 600-DD

*For BSP porting add "U" to end of Model#

Type 6000

High Flow Capacity Volume Booster

High flow capacity in a rugged casing



RoHS

- 1:1 signal to output relay
- High air volume for rapid actuator stroking
- Adjustable bypass valve eliminates actuator overshoot or overdamping
- Soft seat sealing for tight shutoff
- Available in aluminum or 316 stainless steel construction
- EPDM or silicone elastomer options

Supply & Signal Pressure	150 psig (10 bar) max.	
Max Flow Coefficients (Cv)	Supply 3.0 / Exhaust 3.0	
Flow Capacity	115 SCFM (3,450 NL/min)	
Deadband	Under 0.25 psig (0.017 bar)	
Signal to Output Ratio	1:1 ± 5%	
Temperature Limits	-40° to 160°F (-40° to 71°C)	
EPDM Option "R"	-40° to 230°F (-40° to 110°C)	
Silicone	-60° to 230°F (-51° to 110°C)	
Signal Port	1/4" NPT	
Supply/Output Port	1/2" or 3/4" NPT	
In/Out Port	Construction	Model #
1/2" NPT	Aluminum	6000-DA
3/4" NPT	Aluminum	6000-EA
1/2" NPT	Stainless Steel	6000-DS
3/4" NPT	Stainless Steel	6000-ES

Type 6100/6200

High Flow Capacity Volume Booster

Rapid stroke capability in a rugged aluminum or stainless steel casing



RoHS

- 1/4", 1/2", 3/4" NPT porting
- Aluminum or 316 stainless steel
- Integral adjustable bypass valve
- High flow capacity
- Soft valve seat design
- High temperature operation
- Two high output exhaust vents
- Two 1/4" NPT gauge ports

In/Out Port	Construction	Model #
1/4" NPT	Aluminum	6100-BA
1/2" NPT	Aluminum	6100-DA
3/4" NPT	Aluminum	6100-EA
1/4" NPT	Stainless Steel	6200-BS
1/2" NPT	Stainless Steel	6200-DS
3/4" NPT	Stainless Steel	6200-ES

Signal/Output Ratio	1:1
Supply Pressure	250 psig (17.0 bar) max.
Signal Pressure	150 psig (10.0 bar) max.
Maximum Flow Coefficients	3/4"- Forward: 5.0; 6100 Exhaust 3.5; 6200 Exhaust 4.0 1/2"- Forward: 4.5; 6100 Exhaust 3.5; 6200 Exhaust 4.0 1/4"- Forward: 2.0; 6100 Exhaust 2.5; 6200 Exhaust 3.0
Exhaust Capacity SCFM (NL/min)	3/4"-80 (2,264 NL/min), 1/2"-75 (2,123 NL/min) 1/4"-35 (991 NL/min)
Output Accuracy	1.0% of 100 psi output span
Sensitivity Inch wc (cm)	1" (2.54)
Supply Pressure Effect	0.1 psig (0.007 bar) for a 25 psig (1.7 bar) change
Signal Port	1/4" NPT
Supply/Output Port	1/4", 1/2", or 3/4" NPT
Exhaust Port	Type 6100: Ø7/16" or 1/4" NPT option Type 6200: 1/2" NPT
Gauge Port (2)	1/4" NPT

Type 6500/6600

Large Flow Capacity Volume Booster

Rapid stroke capability in a rugged aluminum or stainless steel casing



RoHS

- 1:1 signal to output relays utilized in high flow applications
- Aluminum or 316 stainless steel
- 3/4" or 1" NPT porting
- SIL3 certifications
- Integral adjustable bypass valve

In/Out Port	Construction	Model #
3/4" NPT	Aluminum	6500-EA
1" NPT	Aluminum	6500-FA
3/4" NPT	Stainless Steel	6600-ES
1" NPT	Stainless Steel	6600-FS

Signal/Output Ratio	1:1
Supply Pressure	250 psig (17.0 bar) Maximum
Signal Pressure	150 psig (10.0 bar) Maximum
Maximum Flow Coefficients	3/4"-Forward: 6.0; Exhaust 5.0 1"-Forward: 7.0; Exhaust 5.0
Flow Capacity SCFM (NL/min)	3/4"-350 (9,905); 1"-400 (11,320) 100 psig (7 bar) supply, 20 psig (1.4 bar) output
Signal to Output Ratio Accuracy:	2.0% (% of 100 psi output span) 1.5% (% of 15 psi output span)
Temperature Limits	-40 to 200°F (-40 to 93°C)
Low Temperature Limits	-62 to 194°F (-52 to 90°C)
Deadband	Under 0.2 psig (.01 bar)
Supply Pressure Effect	0.3 psig (.02 bar)
Exhaust Port	Ø7/16" or 1/4" NPT option
Gauge Port (2)	1/4" NPT

Air Relays

Type 200



RoHS

Precision Air Relay

Pilot operated, multi-stage 1:1 relay

• Highly Accurate	• External bias adjustment
• Positive and negative bias capability	• High relief capacity
• Internal bias adjustment	• Stable output
Flow Capacity SCFM (NL/min)	14 (420)
Exhaust Capacity SCFM (NL/min)	
Standard Relief	2.0 (60)
High Relief Capacity	10 (300)
Sensitivity Inch wc (mm)	0.125 (3.2)
Supply Pressure max. psig (bar)	150 (10)
Output Pressure Range psig (bar)	2-120 (0.14-8)
Approximate Size (inches)	2.06 x 2.06 x 2.88
Approximate Size (mm)	52 x 52 x 73

Port Size NPT/BSP psig (bar)	Max. Output Pressure	Model # NPT/BSP
Standard Relief		
1/4"	2-120 (0.14-8)	200-BC/200-BCU
3/8"	2-120 (0.14-8)	200-CC/200-CCU
High Relief Capacity		
1/4"	2-120 (0.14-8)	210-BC/210-BCU
3/8"	2-120 (0.14-8)	210-CC/210-CCU

*For BSP porting add "U" to end of Model#

Type 250



RoHS

Lock-up Air Relay

Reliable for fail in place applications

- Captures downstream pressure when the supply pressure falls below a set value
- Two pressure ranges 15-60 psig (1-4 bar) or 30-120 psig (2-8 bar)
- Manual relief valve
- Corrosion-resistance construction
- Aluminum or stainless steel material option
- No leakage in lock-up position

Cut-off Pressure Range psig (bar)	15-60 (1-4)
Supply Pressure max. psig (bar)	125 (8.35)
Temperature Limits:	0° to 160°F (-18° to 71°C)
Port Size NPT	1/4"
Set Point Range psig (bar)	
15-60 (1-4)	Aluminum
30-120 (2-8)	Aluminum
15-60 (1-4)	Stainless Steel
30-120 (2-8)	Stainless Steel

Type 650



Positive Bias Relay

Increases flow capacity plus adds an adjustable bias pressure

- High flow capacity - allows flows up to 50 SCFM
- Four bias ranges - from 0-15 psi to 2-150 psi
- High relief capacity - large relief valve provides 15 SCFM relief capacity
- Balanced supply valve - rolling diaphragm design makes unit insensitive to supply pressure variation
- Accurate pressure conversion - high sensitivity achieves accurate conversion of signal to output with no lag

RoHS

Flow Capacity SCFM (NL/min)	50 (1,500)
Exhaust Capacity SCFM (NL/min)	15.0 (450)
Sensitivity Inch wc (mm)	0.25 (6.4)
Supply Pressure max. psig (bar)	250 (17)
Output Pressure Range psig (bar)	0-150 (0-10)
Approximate Size (inches)	DIA 3.0 H 3.5
Approximate Size (mm)	DIA 76 H 85

Port Size NPT/BSP	Bias Range PSI (bar)	Model# NPT/BSP*
1/4", 1/2"	0-2 (0-0.14)	650-BA, 650-DA
1/4", 3/8", 1/2"	0-15 (0-1)	650-BC, 650-CC, 650-DC
1/4", 3/8", 1/2"	0-30 (0-2)	650-BD, 650-CD, 650-DD
1/4", 3/8", 1/2"	0-60 (0-4)	650-BE, 650-CE, 650-DE
1/4", 3/8", 1/2"	0-150 (0-10)	650-BF, 650-CF, 650-DF

*For BSP porting add "U" to end of Model#

Type 7150

Precision Air Relay

Superior accuracy and stability with high forward and reverse flow capacity



- 1/4", 1/2" or 3/4" NPT Porting
- High flow capacity
- High relief capacity allows relief flow up to 80 SCFM.
- Superior sensitivity senses output pressure deviations to within 1/4 inch water column pressure.
- Stable output - isolated control chamber prevents output variation and vibration during flow conditions.
- Balanced supply valve - virtually eliminates output pressure changes due to supply pressure variations.
- Positive and negative biasing capability
- Two 1/4" NPT gauge ports

Port Size (NPT)	Range psi (bar)	Model#
1/4"	2-120 (0.14-8.2)	7150-BC
1/2"	2-120 (0.14-8.2)	7150-DC
3/4"	2-120 (0.14-8.2)	7150-EC

Supply Pressure	250 psig (17.0 bar) maximum
Signal Pressure	120 psig (8 bar) maximum
Air Consumption	6 SCFH (3 NL/min) maximum
Temperature Limits	-20 to 160°F (-29 to 71°C)
Maximum Flow Coefficients	3/4"-Forward: 5.0; Exhaust 3.5 1/2"-Forward: 4.5; Exhaust 3.5 1/4"-Forward: 2.0; Exhaust 2.5
Exhaust Capacity SCFM (NL/min)	3/4"-80 (2,264), 1/2"-75 (2,123) 1/4"-35 (991)
Bleed Rate	Less than 0.08 SCFM (2.3 NL/min)
Sensitivity	Less than 1/4 inch (6.3 mm) water
Bias Range	-30 psig (-2 bar) to +100 psig (6.7 bar) Max output 120 psig (8 bar)
Effect of Supply Pressure Variation on Output	.05 psig (3.4 mbar) for a 100 psig (6.9 bar) change
Mounting	Pipe, panel or bracket
Supply/Output Port	1/4", 1/2", or 3/4" NPT
Signal Port	1/4" NPT
Exhaust Port (2)	ø7/16" or 1/4" NPT option
Gauge Port (2)	1/4" NPT
Weight	2.5 lbs (1.13 kg)

Logic Relays

Mite

Mite Series 70/73/74/85 Snap-acting, Pneumatic Relays

Decision making air switches



- Snap-acting design automatically trips on either an increasing or decreasing signal
- Rugged, compact units engineered for high density applications

Pressure Rating 100 psig max.

Temperature Limits -40°F to +180°F

Port Sizes Tapped for 1/4" NPT with 1/8" internal ports

Materials Aluminum, plated steel, neoprene, brass and stainless steel

Description

Snap-acting control relay with manual reset. Will either lock-up or vent control pressure to a valve when tripped

Model#

Mite 70

Snap-acting air signal monitor. Accepts up to four inputs and can be reset automatically

Model#

Mite 73

Snap-acting control relay with integral 3-way or 2-way valve. Combines a Mite 70 with a precision 3-way or 2-way valve

Model#

Mite 74

Snap-acting 3-way valve with two trip points. Automatically activates back up controller if primary fails

Model#

Mite 85

Super Mite

71L/71H High Pass or Low Pass Pneumatic Selecting Relay

Reliable instantaneous selection



- Automatically selects the higher or lower of two pneumatic inputs and passes it downstream while blocking the other

Pressure Rating

100 psig max.

Temperature Limits

-40°F to +180°F

Port Sizes

Tapped for 1/4" NPT with 1/8" internal ports

Materials

Aluminum, plated steel, neoprene, brass and stainless steel

Description

High pass or low pass pneumatic selecting relay.

Automatically selects the higher or lower of two input signals

Model#

Mite 71L/71H

Liquid Level Measuring System

Type L100

Bubble Tube Liquid Level System

Precision transmission of liquid level in open tanks



- Requires only connections to air or gas supply, dip tube and electrical power source
- High accuracy and stability
- Visual purge rate indication
- Blow-down capability
- Excellent for hazardous, high-temp., corrosive or waste water
- NEMA 4X enclosures available

Description

Model#

Basic System

L100

Remote Sensing

L100R

Automatic Blow-Down

L100A

Remote Sensing & Automatic Blow-Down

L100AR

Diaphragm Air Cylinders

Rolling Diaphragm Cylinders

Friction-free conversion of pneumatic pressure to linear force




A rolling diaphragm provides a low-friction dynamic seal. This design provides virtually frictionless conversion of fluid pressure to linear force.

- Low hysteresis
- No blow-by leakage
- Foot & clevis mounts
- Single acting & double acting optional
- Ultra cylinders available with linear ball bearings
- Standard units are easily modified to meet individual customer requirements

Pressure Rating	145 psig (10 bar)
Ambient Temperature Limits	-40° to 222°F (-40° to 106°C)
Bore Sizes	2.3", 2.8", 3.4", 3.9", 4.5"
Stroke	Up to 4.2" (107 mm)
Diaphragm Material	Neoprene Rubber with Dacron Fabric
Other Materials	Aluminum body, chrome plated Steel rod
Bearing Options	Bronze, Ball Bearing, or no bearing (floating)

Mounting Options

ControlAir Cylinders use 4 different main cylinder mounting styles: Universal Mount, Clevis Bracket Mount, Foot Mount and Rod Clevis Mount. Based on the intended function and system requirements, the correct mounting accessories can be selected.

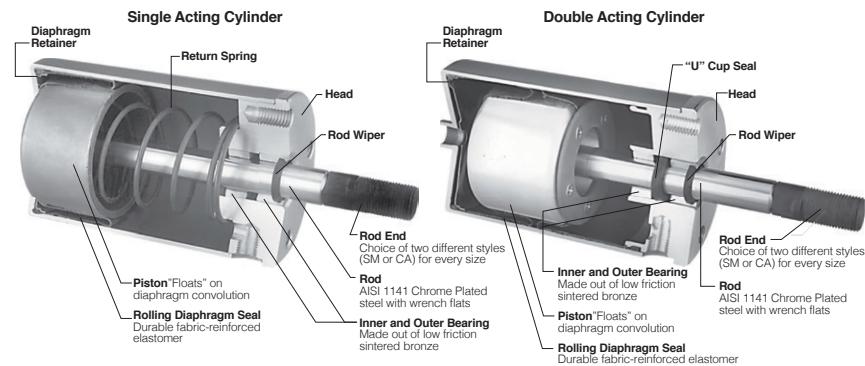

Mini Might Cylinders

Highly sensitive, low hysteresis, friction-free performance



The Mini Might offers the same friction free performance as ControlAir's larger sized diaphragm air cylinders. Mini Might are based on the unique rolling diaphragm principle that virtually eliminates friction. The fact that there is no stick or blow-by of any kind permits uncompromising accuracy and repeatability.

- Highly sensitive
- Low hysteresis
- No blow-by leakage

Pressure Rating	125 psig (8.6 bar)
Bore Sizes MM-1 and MM-2	0.7"
Stroke MM-1 or MM-2	0.7" (18mm)
Bore Sizes 1.7" diameter	1.7"
Stroke 1.7" diameter cylinder	up to 1.75"
Diaphragm Material	Reinforced Nitrile
Other Materials	Aluminium body, chrome plated steel rod, sintered bronze bearing

Compact Cylinders

Compact cylinders are ideal for space-constrained applications or anywhere high force and shorter stroke are required.



Specifications	Part No. 139-190-002	Part No. 139-190-001
Stroke	1"	1 3/4"
Effective Pressure Area	1.7 in.2	1.7 in.2
Dimension A	2 2932"	3 21/32"
Bore Equivalent	1.5"	1.5"
Spring Load ("0" Stroke)	4 lbs	4 lbs.
Spring Load (Max Stroke)	8 lbs.	11 lbs.
Max Operating Pressure	125 psi	125 psi
Mounting Hole Sizes	1/4"-20 UNC	1/4"-20 UNC

Valve Positioner

Type 2000

Pneumatic and Electro-Pneumatic Valve Positioner

Stable and accurate positioning of rotary and linear valves



- Modular construction - base pneumatic unit can be quickly field converted to a fully optioned electro-pneumatic unit
- Rotary and linear, single and double acting
- External and zero adjustment for easy calibration
- Compact design - small size and low weight
- Vibration, position and shock insensitive
- Namur rotary mounting kits
- Linear mounting kits for most valves
- Stainless steel spool valve - long operating life
- High gain pilot valve - Provides quick and accurate valve/actuator response
- Standard pointed indicator (rotary), standard blank cover (linear) and optional raised beacon
- High maximum supply pressure - 145 psig (10 Bar)
- FM, CSA & ATEX approvals - for Intrinsically Safe (CA2010/CA2011) and Explosion-proof (CA2020/CA2021) operation
- Optional mechanical switches and 4-20mA position feedback

	Pneumatic (CA2000)	Electro-Pneumatic (CA2005/CA2010/CA2011/CA2020/CA2021)	(CA2022/CA2023)
Input Signal	3-15 PSI (0.2-1.0 Bar)	4-20 mA (Ri<250 ohms)	4-20 mA (Ri<500 ohms)
Supply Pressure	<145 PSI (<10 Bar)	21.8-145 PSI (1.5-10 Bar)	21.8-100 PSI (1.5-7 Bar)
Linearity Error	<0.7 % f.s.	<1.0% f.s.	<0.8% f.s.
Hysteresis	<0.4% f.s.	<0.6% f.s.	<0.5% f.s.
Repeatability	<0.3% f.s.	<0.5% f.s.	<0.4% f.s.
Flow Capacity @29 PSI (2.0 Bar)	SCFM NL/min 9.5 268.9	SCFM NL/min 9.5 268.9	
@87 PSI (6.0 Bar)	28.3 800.1	28.3 800.1	
@145 PSI (10 Bar)	47.1 1333	47.1 1333	
Air Consumption @29 PSI (2.0 Bar)	SCFM NL/min 0.18 5.09	SCFM NL/min 0.2 5.7	
@87 PSI (6.0 Bar)	0.53 424.5	0.6 17.0	
@145 PSI (10 Bar)	0.88 707.5	1.0 28.3	
Impedance		260 Ohms @ 70°F	500 Ohms @ 70°F
Loop Load		5.2 Volts @ 20 mA	9.5 Vdc @ 20 mA
Temperature Range	-40° to 185° F (-40° to 85° C)		-40° to 158° F (-40° to 70° C)
Port Sizes	Pneumatic: 1/4" NPT; Gauge Ports - 1/8" NPT Electric: 1/2" NPT; M20-1.5 (ATEX)		
Media	Clean, dry, oil-free instrument air, filtered to 40 micron		Sweet natural gas or methane
Enclosure	Nema 4X / IP66 aluminum with polyester epoxy finish		
Weight	3.5 lbs (1.6 kg) 5.1 lbs (2.3 kg)	3.8 lbs (1.7 kg) CA2005/CA2010/CA2011 5.4 lbs (2.5 kg) CA2005 with feedback 4.8 lbs (2.2 kg) CA2020/CA2011 6.0 lbs (2.7 kg) CA2022/CA2023	


Mechanical Switches

(S & FS Option)

Input Signal	Honeywell V15S05-CZ100 A05-01
Switch Type	SPDT
Loop Load	5A 125/ 250 VAC/ 0.1A 48 Vdc
Operating Force	100gf
Position Feedback	<0.3% f.s.

(F & FS Option)

Voltage	Supply 12-30 Vdc
Output	2 Wire; 4-20 mA DC
Loop Impedance	Max. 700Ω @ 24 Vdc
Linearity Error	<1.5% FS.
Hysteresis Error	<0.5% FS.

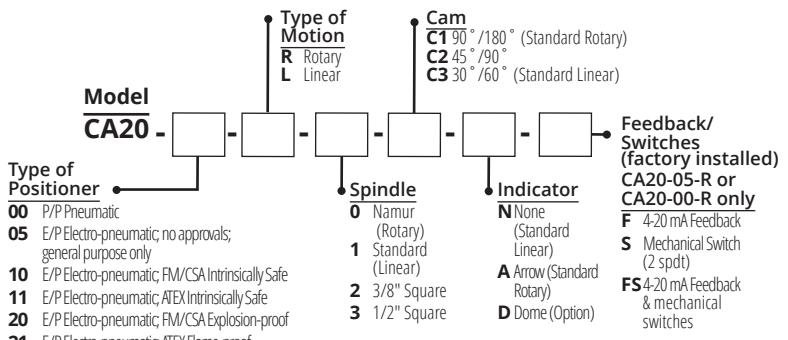



AIROYAL COMPANY

AUTHORIZED



Distributor

SALES@AIROYAL.BIZ | AIROYALCOMPANY.NET

NEW JERSEY

43 Newark Way, Maplewood, NJ 07040

973-761-4150 Fax 973-761-5731

PENNSYLVANIA

610-314-5566 Toll Free: 866-247-6645

DELAWARE & MARYLAND

Toll Free: 866-247-6645 Fax 410-235-0011

NEW YORK

306 Commack Rd. Ste. 200, Commack, NY 11725

516-248-4833 Fax 631-499-0119