

CUSTOM ENGINEERED SWITCHES

Engineered Solutions
for The Most Severe
Pressure, Vacuum and
Temperature Applications

NASON
NEW THINKING

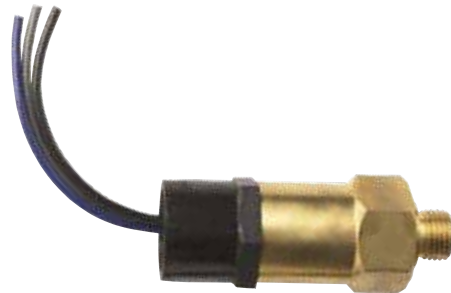


TABLE OF CONTENTS

8

PRESSURE SWITCHES



| | | |
|----|-----------|--|
| 9 | SQ | Low Pressure Switch |
| 10 | SM | Low Pressure Switch |
| 11 | MM | Low Pressure Switch |
| 12 | LM | Low Pressure Switch |
| 13 | CJ | Low Pressure Switch |
| 14 | XM | High Pressure Switch |
| 15 | WX | High Pressure Switch |
| 16 | CD | High Pressure Switch |
| 17 | CF | High Pressure Switch (Fixed Set Point) |

18

VACUUM SWITCHES



| | | |
|----|-----------|--|
| 19 | VM | Vacuum Switch |
| 20 | NV | Vacuum Switch |
| 21 | VP | Vacuum Switch |
| 22 | | Pressure / Vacuum Switch Optional Configurations |
| 23 | | Pressure / Vacuum Switch Media Connection Designations |
| 25 | | Pressure / Vacuum Switch Application Worksheet |

26

TEMPERATURE SWITCHES



| | | |
|----|-----------|--|
| 27 | TT | Temperature Switch |
| 28 | TD | Temperature Switch |
| 29 | TM | Temperature Switch |
| 30 | HT | Temperature Switch |
| 31 | TW | Temperature Switch |
| 32 | | Temperature Switch Media Connection Designations |
| 34 | | Temperature Switch Optional Configurations |
| 35 | | Temperature Switch Application Worksheet |

TRANSDUCERS



| | | |
|----|----------------|--|
| 38 | NT25 | Transducer |
| 40 | NT40 | Transducer |
| 42 | NT41 | Transducer |
| 44 | NT100 | Transducer |
| 46 | NT110 | Transducer |
| 48 | NES | Electronic Pressure Switch w/Relay Output |
| 50 | NESD | Pressure Switch/Transducer |
| 52 | NTBT | Pressure Transducer with Wireless Bluetooth |
| 54 | NTBT-DL | Pressure Transducer with Wireless Bluetooth & Data Logging |
| 56 | | Wiring Diagrams |
| 57 | | Cable Assemblies |

RESOURCES

| | |
|----|-------------------------------------|
| 7 | Basic Electrical Connection Options |
| 58 | Diaphragm Compatibility |
| 59 | Conversion Tables |
| 60 | Glossary of Terms |


NEW THINKING

FOR BETTER SOLUTIONS

After more than seventy years of producing quality electrical, hydraulic, and pneumatic components for use in military and industrial applications, we've established ourselves as industry leaders in efficiency, flexibility, and customer service. Our line of custom engineered switches offers proven reliability and unmatched customization.

Parts made by Nason are used around the globe in the harshest of environments, where engineers and users depend on the precision and reliability we promise to each of our clients. Our switches undergo rigid testing to ensure reliable service. We leave nothing to chance, crafting and assembling all parts within our own plant in the United States.

Our offering of options in ratings, connections, and mounting is unmatched in the industry. Besides our extensive stock of legacy switches, we keep an incredibly diverse supply of optional media and electrical connections to match our clients' varied design specifications. Whatever your challenge, our technical support is available to you before and after the sale.

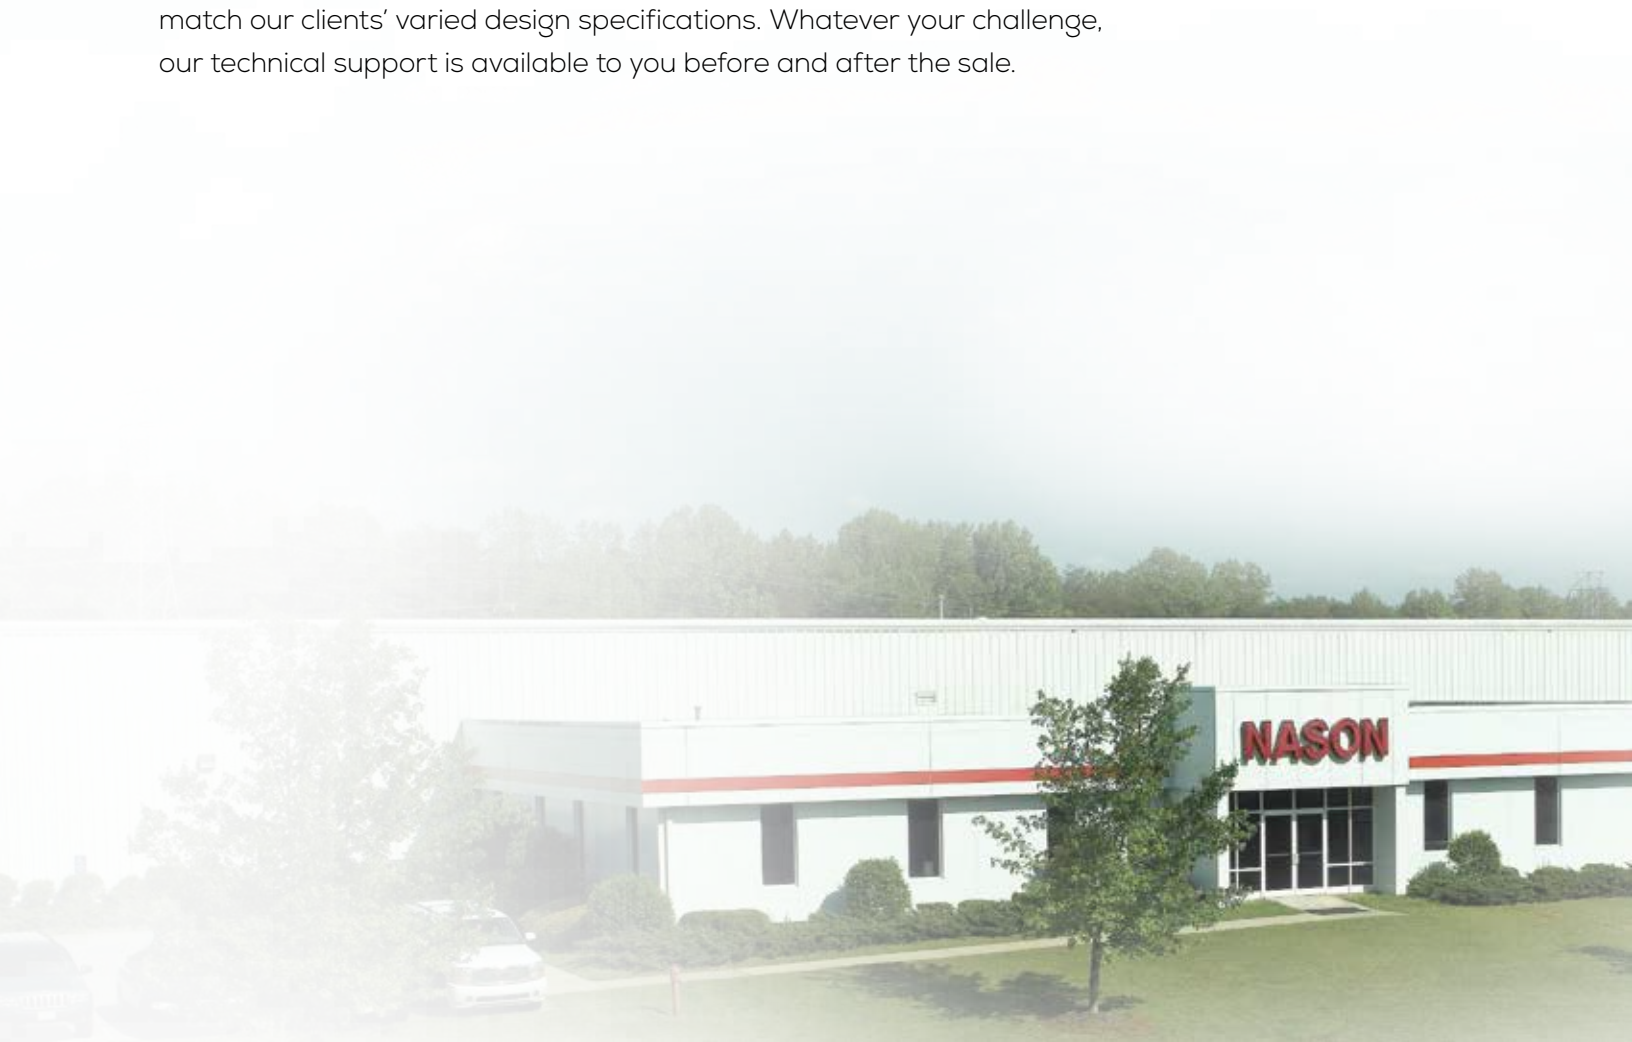

NASON SWITCH

DESIGNS ENSURE HIGH RELIABILITY

All of Nason's pressure switches use a snap-action electrical device activated by an elastomer diaphragm or piston, offering a precise and repeatable design. The snap-action design will maintain its state with contacts either open or closed, until a precise set point is reached when it will snap over center to a new state. It will remain in that state until a distinct change towards its original setting is sensed, at which time it will snap back to its original state. The design's snap-action feature prevents contact intermittency near its switch point, which is common in creeper designs. As system pressures fluctuate, our switches' inherent differential prevents searching. Nason uses only the highest quality snap-action switches. These switches and Nason's are UL, CSA, and military approved.

ACCURACY

Our elastomer diaphragm or piston, which moves a precise .040 of an inch, ensures accurate, instantaneous contact under all operating conditions. While nitrile is preferred for general use, we can also provide ethylene propylene, fluorocarbon, fluorosilicone, and neoprene, depending on your need. Nason tests 100% of its switches for accuracy.


RELIABILITY

Under most operating conditions, Nason switches have an operational life of over one million cycles. Smart design, quality components, and careful assembly make a switch that easily outlasts the competition.


FLEXIBILITY

We offer media connections in NPT, BSP, SAE, JIS, DIN, MS, and many more (refer to page 23) as well as all the electrical connections depicted on the facing page.

DIAPHRAGM TYPE

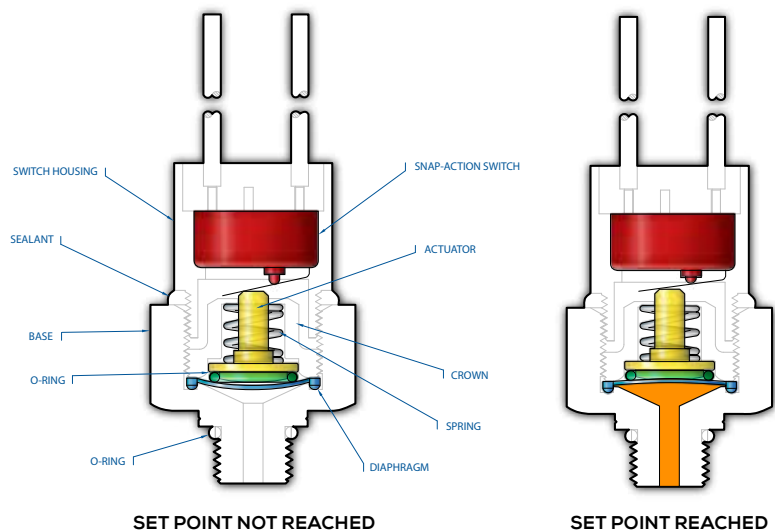

PISTON TYPE

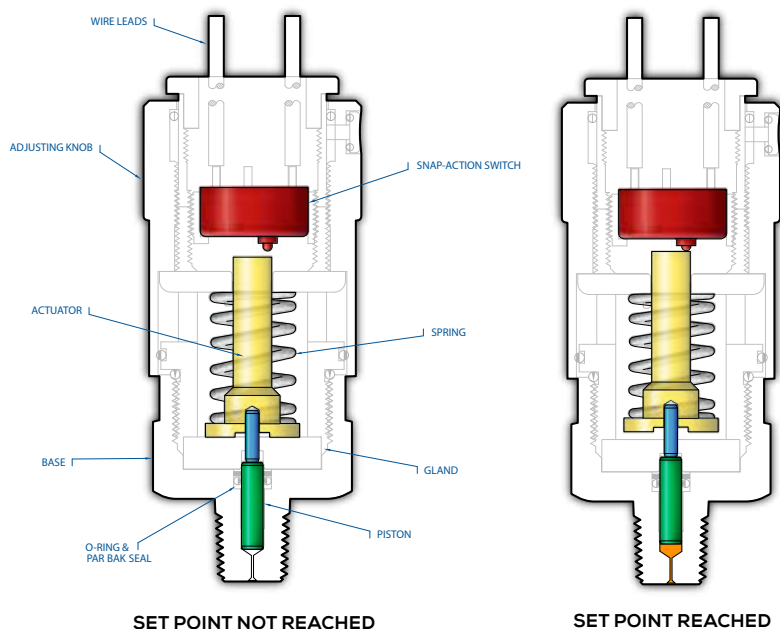

ELECTRICAL CONNECTION OPTIONS

MORE THAN THE COMPETITION

Nason knows that your designs are used in all types of applications imaginable, so we want to make sure you have a choice of how you configure electrical connections. We offer you a wide and growing selection of connections, and if you want something else, just ask our design engineers for it.



Screw
Terminals
#8 - 32

| | | | | | | | |
|--|---|---|-------------------------------------|--|---|---|-----------------------|
| | | | | | | | |
| HF | HH | HR | HP | HM | MP | NP | |
| DIN43650A 1/2" Conduit (Plug & Receptacle) IP65 | DIN43650A (Plug Only) | DIN43650A Strain Relief (Plug & Receptacle) IP67 | 9.4mm DIN (Plug Only) | 9.4mm DIN (Plug & Receptacle) IP65 | Metri-Pack Female 280 Series Sealed IP66 | Metri-Pack Male 280 Series Sealed IP66 | |
| | | | | | | | |
| CP | DP | PP | QC | WL | WP | TP | |
| Metri-Pack Female 150 Series Sealed IP66 | Metri-Pack Male 150 Series Sealed IP66 | Boot (Military Connector) | 1/4" Male Spade Quick Connect | Wire Leads | Weather Pack (Female) IP66 | Weather Pack (Male) IP66 | |
| | | | | | | | |
| EL | EF | WD | PD | ES | CL | SL | VL |
| 1/2" NPT Male Conduit | 1/2" NPT Female Conduit | Deutsch Receptacle IP67 | Deutsch Plug IP67 | M12 - 4PIN IP67 | Sheathed 18 AWG Primaries | SJO Cable | Convolute Covering |

Color Code:
Pin Assignments:
DIN Connector Pin Assignments:
M12 Connector Pin Assignments:

Black - Common
A - Normally Open
#1 - Common
#1 - Common

Red - Normally Open
B - Common
#2 - Normally Closed
#2 - Not Used


Blue - Normally Closed
C - Normally Closed
#3 - Normally Open
#3 - Normally Open

#4 - Not Used
#4 - Normally Closed

PRESSURE SWITCHES



- Low to high pressure switch models with 2 psi to 7500 psi set points
- High-quality snap-action design
- Long-life elastomer diaphragms
- Proven sealed piston sensor on high-pressure models
- Over one million operating cycles
- 100% tested for accuracy
- Models for both pneumatic and hydraulic applications
- Adjustable and factory preset models
- Customizable
- NEMA 4 and 13 available

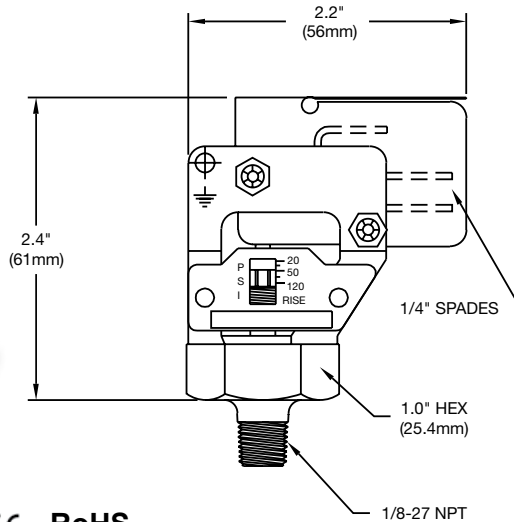

UL US CE RoHS

Features

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Fingertip adjustment
- Visual calibration
- Economical
- Quick delivery

Operating Specifications

| | | |
|----------------------------|---------------------|-----------------|
| Set Point Range | 2 — 120 PSI | (.14 — 8.3 Bar) |
| Set Point Tolerance | ±1 PSI or 5% | (.07 Bar) |
| Maximum Operating Pressure | 250 PSI | (17 Bar) |
| Proof Pressure | 750 PSI | (51 Bar) |
| Differential | 10 — 20% | |
| Current Rating | 10 A @ 125/250 VAC | 5 A @ 30 VDC |
| Media Connection | 1/8" NPT Male Brass | |
| Circuit Form | SPDT | |
| Electrical Connection | 1/4" Blades | |
| Diaphragm Material | Buna N | |
| Cycle Life | 1 Million | |
| Operating Temperature | -20°F - +220°F | |
| Unit Weight | .2 lbs | |

In-Stock Low Pressure Switches



Model SQ-1
Adjustment Range 2 — 10 PSI




Model SQ-2
Adjustment Range 6 — 30 PSI



Model SQ-3
Adjustment Range 20 — 120 PSI



Shown with HP electrical option

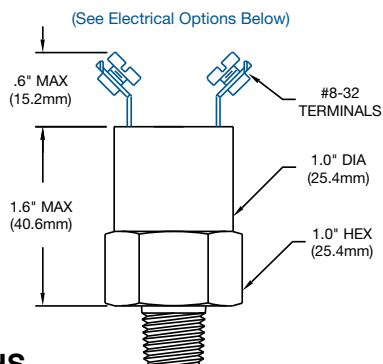

UL **CE** **RoHS**

Features

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Factory preset
- Available in a wide range of configurations
- Economical
- Pneumatic and hydraulic applications
- NEMA 4, 13

Operating Specifications

| | | |
|----------------------------|---|--------------------------|
| Set Point Range | 2 — 120 PSI | (.14 — 8.3 Bar) |
| Set Point Tolerance | ±1 PSI or 5% | (.07 Bar) |
| Maximum Operating Pressure | 250 PSI | (17 Bar) |
| Proof Pressure | 750 PSI | (51 Bar) |
| Differential | 8 — 16% | |
| Current Rating | 5 A @ 250 VAC | 5 A @ 30 VDC (Resistive) |
| Media Connection | Standard: Brass (Optional: Aluminum, Nickel Plating, Delrin, Zinc Plated Steel, 303 SS, 316 SS) | |
| Circuit Form | SPST-NO, SPST-NC or SPDT | |
| Electrical Connection | See Order Chart Below for Options | |
| Diaphragm Material | Buna N | |
| Cycle Life | 1 Million | |
| Operating Temperature | -20°F - +220°F | |
| Unit Weight | .13 lbs | |

CONTACT Airoyal to create your own custom CAD file

How to Order (Example: Part Number: **SM - 2A - 95R /**)


| Media Connection | | Circuit Form | | Fixed Set Point | | Set Point Direction | | Electrical Options | |
|------------------|---|--------------|---------|-----------------|-----|---------------------|---------|--------------------|------------------------------------|
| 1 | 1/4" NPT Male | A | SPST-NO | 2 — 120 | PSI | R | Rising | WL | Wire Leads 18" |
| 2 | 1/8" NPT Male | B | SPST-NC | | | F | Falling | QC | 1/4" Spade Connection |
| 6 | 7/16" SAE O-Ring (-4) | C | SPDT | | | | | WP | Weather Pack |
| 14 | 1/2" NPT Male 1/8" NPT Female | | | | | | | HR | DIN43650A Connector |
| 17 | 1/4" BSPP Male (G1/4) | | | | | | | MP | Metri-Pack |
| 28 | 1/8" BSPP Male (G1/8) | | | | | | | AT | 10 A @ 125/250 VAC 5 A @ 30 VDC |
| 41 | 7/16" — 20 Internal 45° Flare — SAE J 513 | | | | | | | GG | Internal Ground |
| 77 | M16 x 1.5 SAE J2244-3 | | | | | | | AU | Gold Plate/Alloy for low currents |

* Defaults to Screw Terminals

For more **media connections**, see pages 23-24.

For all available **optional configurations**, see page 22.

For more **electrical connections**, see page 7.

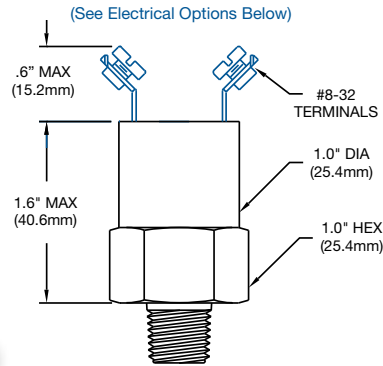

UL US CE RoHS

Shown with WP electrical option

Features

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Factory preset
- Available in a wide range of configurations
- Economical
- Pneumatic and hydraulic applications
- NEMA 4, 13

Operating Specifications

| | | |
|-----------------------------------|---|--------------------------|
| Set Point Range | 2 — 120 PSI | (.14 — 8.3 Bar) |
| Set Point Tolerance | ±1 PSI or 5% | (.07 Bar) |
| Maximum Operating Pressure | 600 PSI | (41 Bar) |
| Proof Pressure | 1800 PSI | (124 Bar) |
| Differential | 8 — 16% | |
| Current Rating | 5 A @ 250 VAC | 5 A @ 30 VDC (Resistive) |
| Media Connection | Standard: Brass (Optional: Aluminum, Nickel Plating, Delrin, Zinc Plated Steel, 303 SS, 316 SS) | |
| Circuit Form | SPST-NO, SPST-NC or SPDT | |
| Electrical Connection | See Order Chart Below for Options | |
| Diaphragm Material | Buna N | |
| Cycle Life | 1 Million | |
| Operating Temperature | -20°F - +220°F | |
| Unit Weight | .16 lbs | |

CONTACT Airoyal to create your own custom CAD file

How to Order (Example: Part Number: **MM - 6A - 80R / WL**)


| Media Connection | | Circuit Form | | Fixed Set Point | | Set Point Direction | | Electrical Options | |
|------------------|---|--------------|---------|-----------------|-----|---------------------|---------|--------------------|------------------------------------|
| 1 | 1/4" NPT Male | A | SPST-NO | 2 — 120 | PSI | R | Rising | WL | Wire Leads 18" |
| 2 | 1/8" NPT Male | B | SPST-NC | | | F | Falling | WP | Weather Pack |
| 6 | 7/16" SAE O-Ring (-4) | C | SPDT | | | | | HR | DIN43650A Connector |
| 14 | 1/2" NPT Male | | | | | | | MP | Metri-Pack |
| | 1/8" NPT Female | | | | | | | AT | 10 A @ 125/250 VAC 5 A @ 30 VDC |
| 17 | 1/4" BSPP Male (G1/4) | | | | | | | AU | Gold Plate/Alloy for low currents |
| 28 | 1/8" BSPP Male (G1/8) | | | | | | | | |
| 41 | 7/16" — 20 Internal 45° Flare — SAE J 513 | | | | | | | | |

* Defaults to Screw Terminals

For more [media connections](#), see pages 23-24.

For all available [optional configurations](#), see page 22.

For more [electrical connections](#), see page 7.

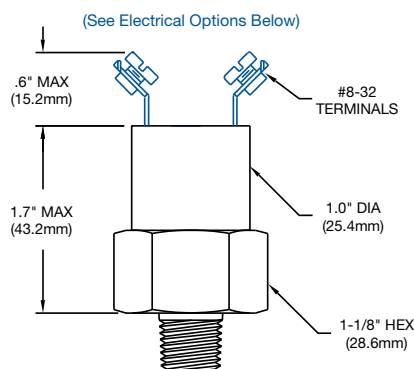

Shown with unibody housing and EF electrical option

UL **CE** **RoHS**

Features

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Factory preset
- Available in a wide range of configurations
- Economical
- Pneumatic and hydraulic applications
- NEMA 4, 13

Operating Specifications

| | | |
|-----------------------------------|--|--------------------------|
| Set Point Range | 10 — 300 PSI | (.69 — 20 Bar) |
| Set Point Tolerance | ±1 PSI or 5% | (.07 Bar) |
| Maximum Operating Pressure | 2000 PSI | (137 Bar) |
| Proof Pressure | 6000 PSI | (413 Bar) |
| Differential | 12 — 24% | |
| Current Rating | 5 A @ 250 VAC | 5 A @ 30 VDC (Resistive) |
| Media Connection | Standard: Brass (<i>Optional: Nickel Plating, Delrin, Zinc Plated Steel, 303 SS, 316 SS</i>) | |
| Circuit Form | SPST-NO, SPST-NC or SPDT | |
| Electrical Connection | See Order Chart Below for Options | |
| Diaphragm Material | Buna N | |
| Cycle Life | 1 Million | |
| Operating Temperature | -20°F - +220°F | |
| Unit Weight | .23 lbs | |

**CONTACT Airoyal to
create your own
custom CAD file**

How to Order (Example: Part Number: **LM - 6A - 250R / WL**)


| Media Connection | | Circuit Form | | Fixed Set Point | | Set Point Direction | | Electrical Options | |
|------------------|---|--------------|---------|-----------------|-----|---------------------|---------|--------------------|--------------------------------------|
| 1 | 1/4" NPT Male | A | SPST-NO | 10 — 300 | PSI | R | Rising | WL | Wire Leads 18" |
| 2 | 1/8" NPT Male | B | SPST-NC | | | F | Falling | WP | Weather Pack |
| 6 | 7/16" SAE O-Ring (-4) | C | SPDT | | | | | HR | DIN43650A Connector |
| 12 | M10 x 1 SAE J2244-3 | | | | | | | MP | Metri-Pack |
| 49 | M14 x 1.5 J2244/3 | | | | | | | AT | 10 A @ 125/250 VAC 5 A @ 30 VDC |
| 68 | 9/16" — 18 SAE O-Ring Face Seal (Female) | | | | | | | AU | Gold Plate/Alloy for low currents |

* Defaults to Screw Terminals

For more [media connections](#),
see pages 23-24.

For all available [optional configurations](#),
see page 22.

For more [electrical connections](#),
see page 7.

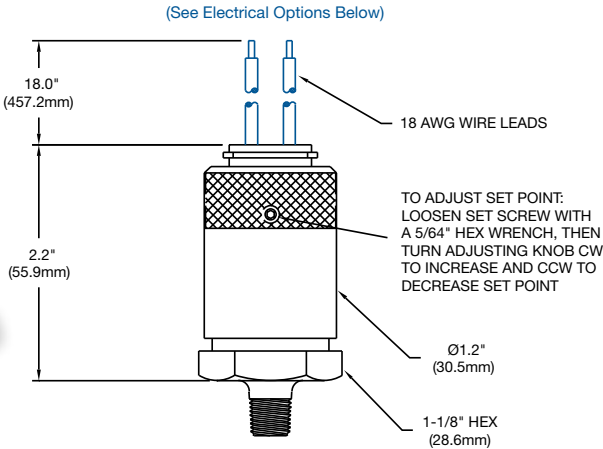

Shown with HM electrical option

UL **CE** **RoHS**

Features

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Field adjustable
- Compact design
- Easily customized
- Quick delivery
- NEMA 4, 13

Operating Specifications


| | | |
|----------------------------|--|--------------------------|
| Set Point Range | 3 — 120 PSI | (.21 — 8.3 Bar) |
| Set Point Tolerance | ±1 PSI or 5% | (.07 Bar) |
| Maximum Operating Pressure | 250 PSI (Ranges 1 — 3) | (17 Bar) |
| Proof Pressure | 750 PSI (Ranges 1 — 3) | (51 Bar) |
| Differential | 10 — 20% | |
| Current Rating | 3 A @ 125 VAC | 2 A @ 30 VDC (Resistive) |
| Media Connection | Standard: Brass (Optional: Aluminum, Nickel Plating, Delrin, 303 SS, 316 SS) | |
| Circuit Form | SPST-NO, SPST-NC or SPDT | |
| Electrical Connection | See Order Chart Below for Options | |
| Diaphragm Material | Buna N | |
| Cycle Life | 1 Million | |
| Operating Temperature | -20°F - +220°F | |
| Unit Weight | .42 lbs | |

CONTACT Airoyal to create your own custom CAD file

How to Order (Example: Part Number: **CJ - 1B3 - 60J / WL**)

| Media Connection | | Circuit Form | | Range | | Desired Set Point | | Set Point Direction | | Electrical Options | |
|------------------|-----------------------|--------------|---------|-------|----------------|-------------------|--|---------------------|--------------------|--------------------|-----------------------------------|
| 1 | 1/4" NPT Male | A | SPST-NO | 1 | 3 — 10 PSI | 3 — 120 PSI | | J | Rising Adjustable | WL | Wire Leads 18" |
| 2 | 1/8" NPT Male | B | SPST-NC | 2 | 6 — 30 PSI | *121 — 1500 PSI | | G | Falling Adjustable | WP | Weather Pack |
| 6 | 7/16" SAE O-Ring (-4) | C | SPDT | 3 | 20 — 120 PSI | | | | | HM | 9.4mm DIN |
| 12 | M10 x 1 SAE J2244-3 | | | 4* | 100 — 400 PSI | | | | | MP | Metri-Pack |
| 17 | 1/4" BSPP Male | | | 5* | 500 — 1500 PSI | | | | | AU | Gold Plate/Alloy for low currents |
| 28 | 1/8" BSPP Male | | | | | | | | | | |

* Not yet UL recognized

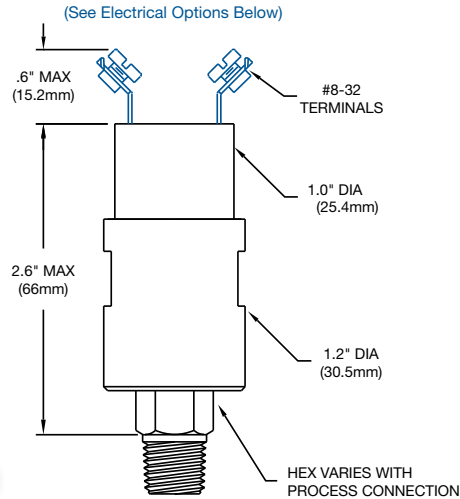

Shown with unibody housing and EL electrical option

UL **CE** **RoHS**

Features

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Factory preset
- Compact design
- Available in a wide range of configurations
- Proven in the most demanding mobile hydraulic applications
- NEMA 4, 13

Operating Specifications

| | | |
|-----------------------------------|--|--------------------------|
| Set Point Range | 40 — 4000 PSI | (1.3 — 275 Bar) |
| Set Point Tolerance | ±5 PSI or 5% | (.34 Bar) |
| Maximum Operating Pressure | 5000 PSI | (344 Bar) |
| Proof Pressure | 15000 PSI | (1034 Bar) |
| Differential | 8 — 16% | |
| Current Rating | 5 A @ 250 VAC | 5 A @ 30 VDC (Resistive) |
| Media Connection | Standard: Zinc Plated Steel (<i>Optional: Brass, Nickel Plating, 303 SS, 316 SS</i>) | |
| Circuit Form | SPST-NO, SPST-NC or SPDT | |
| Electrical Connection | See Order Chart Below for Options | |
| Diaphragm Material | Buna N | |
| Cycle Life | 1 Million | |
| Operating Temperature | -20°F - +220°F | |
| Unit Weight | .56 lbs | |

CONTACT Airoyal to create your own custom CAD file

How to Order (Example: Part Number: **XM - 1A - 1500R / WL**)


| Media Connection | | Circuit Form | | Fixed Set Point | | Set Point Direction | | Electrical Options | |
|------------------|-----------------------------|--------------|---------|-----------------|------------|---------------------|---------|--------------------|------------------------------------|
| 1 | 1/4" NPT Male | A | SPST-NO | 40 | — 4000 PSI | R | Rising | WL | Wire Leads 18" |
| 2 | 1/8" NPT Male | B | SPST-NC | | | F | Falling | WP | Weather Pack |
| 4 | 7/16" SAE 37° Flare (-4) | C | SPDT | | | | | HR | DIN43650A Connector |
| 6 | 7/16" SAE O-Ring (-4) | | | | | | | MP | Metri-Pack |
| 11 | 9/16" SAE O-Ring (-6) | | | | | | | AT | 10 A @ 125/250 VAC 5 A @ 30 VDC |
| 17 | 1/4" BSPP Male (G1/4) | | | | | | | AU | Gold Plate/Alloy for low currents |
| 47 | 1/4" — 19BSPP Female (G1/4) | | | | | | | | |

* Defaults to Screw Terminals

For more **media connections**, see pages 23-24.

For all available **optional configurations**, see page 22.

For more **electrical connections**, see page 7.

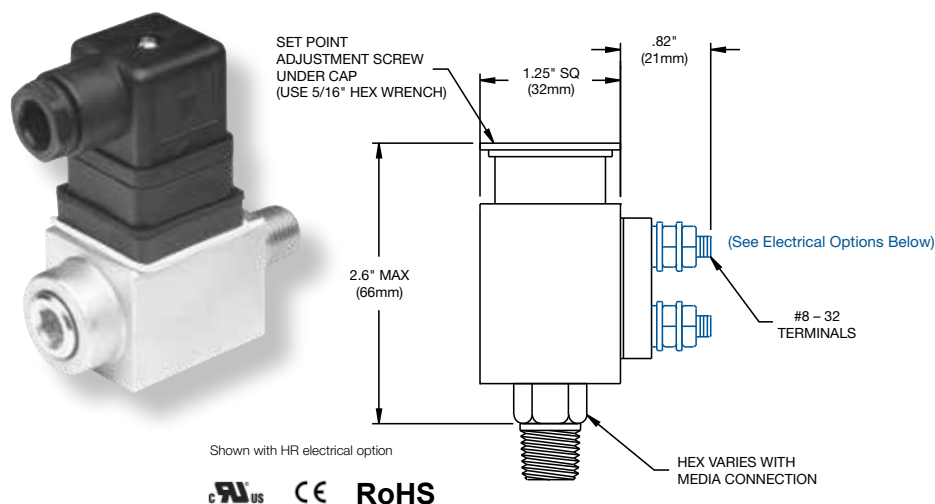

Features

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Field adjustable
- Compact design
- Available in a wide range of configurations
- Proven in the most demanding mobile hydraulic applications
- NEMA 4, 13

Operating Specifications

| | | |
|----------------------------|--|--------------------------|
| Set Point Range | 50 — 5000 PSI | (1.38 — 344 Bar) |
| Set Point Tolerance | ±5 PSI or 5% | (.34 Bar) |
| Maximum Operating Pressure | 5000 PSI | (344 Bar) |
| Proof Pressure | 15000 PSI | (1034 Bar) |
| Differential | 3 — 10% | |
| Current Rating | 5 A @ 250 VAC | 5 A @ 30 VDC (Resistive) |
| Media Connection | Standard: Zinc Plated Steel (<i>Optional: Brass, Nickel Plating, 303 SS, 316 SS</i>) | |
| Circuit Form | SPST-NO, SPST-NC or SPDT | |
| Electrical Connection | See Order Chart Below for Options | |
| Diaphragm Material | Buna N | |
| Cycle Life | 1 Million | |
| Operating Temperature | -20°F - +220°F | |
| Unit Weight | .80 lbs | |

CONTACT Airoyal to create your own custom CAD file

How to Order (Example: Part Number: **WX - 2A - 100J / HR** *)


| Media Connection | | Circuit Form | | Adjustment Range | | Set Point Direction | | Electrical Options | |
|------------------|---------------------------------|--------------|---------|------------------|---|---------------------|----|------------------------------------|--|
| 1 | 1/4" NPT Male | A | SPST-NO | 50 — 150 PSI | J | Rising Adjustable | WL | Wire Leads 18" | |
| 2 | 1/8" NPT Male | B | SPST-NC | 140 — 400 PSI | G | Falling Adjustable | QC | 1/4" Spade Connection | |
| 4 | 7/16" SAE 37° Flare (-4) | C | SPDT | 300 — 800 PSI | | | WP | Weather Pack | |
| 6 | 7/16" SAE O-Ring (-4) | | | 700 — 2500 PSI | | | HR | DIN43650A Connector | |
| 11 | 9/16" SAE O-Ring (-6) | | | 2000 — 5000 PSI | | | MP | Metri-Pack | |
| 17 | 1/4" BSPP Male (G1/4) | | | | | | AT | 10 A @ 125/250 VAC 5 A @ 30 VDC | |
| 39 | 1/4" — 18 NPTF SAE J516 (-4) | | | | | | GG | Internal Ground | |
| 67 | 9/16" — 18 SAE O-Ring Face Seal | | | | | | AU | Gold Plate/Alloy for low currents | |

* Defaults to Screw Terminals

For more [media connections](#), see pages 23-24.

For all available [optional configurations](#), see page 22.

For more [electrical connections](#), see page 7.

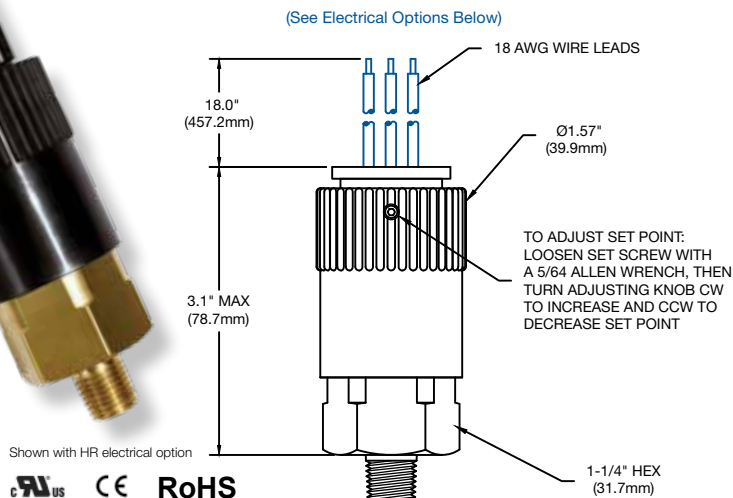

Features

- Long-life elastomer diaphragm (Ranges 1 – 3)
- Proven sealed piston sensor (Ranges 4 – 8)
- High-quality snap-action switch
- Field adjustable
- Easily customized
- Quick delivery
- NEMA 4, 13

Operating Specifications

| | | |
|----------------------------|--|--------------------------|
| Set Point Range | 10 – 7500 PSI | (.69 – 517 Bar) |
| Set Point Tolerance | ±5 PSI or 5% | (.34 Bar) |
| Maximum Operating Pressure | 1000 PSI (Ranges 1 – 3) | (69 Bar) |
| | 5000 PSI (Ranges 4 – 7) | (344 Bar) |
| | 7500 PSI (Range 8) | (517 Bar) |
| Proof Pressure | 3000 PSI (Ranges 1 – 3) | (206 Bar) |
| | 15000 PSI (Ranges 4 – 7) | (1034 Bar) |
| | 22500 PSI (Range 8) | (1551 Bar) |
| Differential | 10 – 20% | |
| Current Rating | 5 A @ 250 VAC | 5 A @ 30 VDC (Resistive) |
| Media Connection | Standard: Brass (Optional: Nickel Plating, 303 SS, 316 SS) | |
| Circuit Form | SPST-NO, SPST-NC or SPDT | |
| Electrical Connection | See Order Chart Below for Options | |
| Diaphragm Material | Buna (Ranges 1 – 3) Hardened Steel Piston (Ranges 4 – 8) | |
| Cycle Life | 1 Million | |
| Operating Temperature | -20°F - +220°F | |
| Unit Weight | .47 lbs (noryl adjustment knob); .70 lbs (metal adjustment knob) | |

**CONTACT Airoyal to
create your own
custom CAD file**

How to Order (Example: Part Number: **CD - 1B5 - 750J / EL**)

| Media Connection | Circuit Form | Range | Desired Set Point | Set Point Direction |
|---|---|--|----------------------|---|
| Piston | A SPST-NO B SPST-NC C SPDT | 1 10 – 40 PSI 2 25 – 100 PSI 3 50 – 200 PSI 4 100 – 400 PSI 5 250 – 1000 PSI 6 500 – 2000 PSI 7 1200 – 4500 PSI 8 2400 – 7500 PSI | 10 – 7500 PSI | J Rising Adjustable G Falling Adjustable |
| Diaphragms | | | | |
| 1 1/4" NPT Male 3 3/4" SAE Male (-8) 11 9/16" SAE Male | | | | |
| 1 1/4" NPT Male 9 3/8" NPT Male | | | | |


Electrical Options

- WL** Wire Leads 18"
- EL** Male Conduit 1/2" – 14
- EF** Female Conduit 1/2" – 14
- HR** DIN43650A Connector
- HH** DIN43650A Plug Only
- WP** Weather Pack
- MP** Metri-Pack
- WD** Deutsch
- AT** 10 A @ 125/250 VAC
5 A @ 30 VDC
- AU** Gold Plate/Alloy for low currents

For more [media connections](#), see pages 23-24.

For all available [optional configurations](#), see page 22.

For more [electrical connections](#), see page 7.

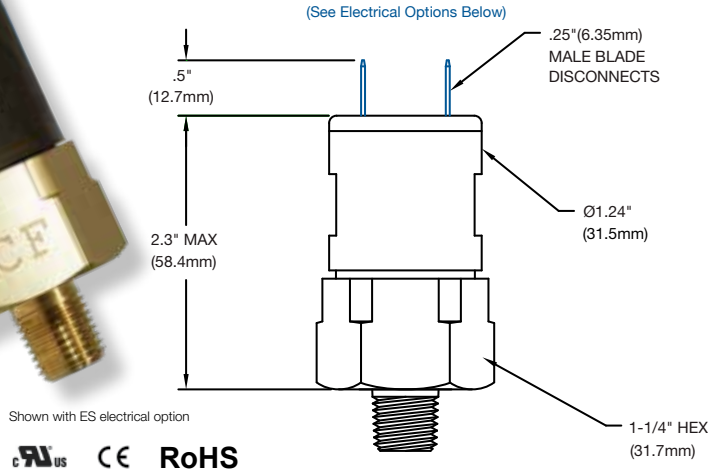

Features

- Long-life elastomer diaphragm (Set Points: 10 — 300 PSI)
- Proven sealed piston sensor (Set Points: 100 — 4500 PSI)
- High-quality snap-action switch
- Easily customized
- Quick delivery
- NEMA 4, 13

Operating Specifications

| | | |
|-----------------------------------|---|--------------------------|
| Set Point Range | 10 — 4500 PSI | (.69 — 310 Bar) |
| Set Point Tolerance | ±5 PSI or 5% | (.34 Bar) |
| Maximum Operating Pressure | 1000 PSI (Diaphragm Model) | (69 Bar) |
| | 5000 PSI (Piston Model) | (344 Bar) |
| Proof Pressure | 3000 PSI (Diaphragm Model) | (206 Bar) |
| | 15000 PSI (Piston Model) | (1034 Bar) |
| Differential | 10 — 20% | |
| Current Rating | 5 A @ 250 VAC | 5 A @ 30 VDC (Resistive) |
| Media Connection | Standard: Brass (<i>Optional: Nickel Plating, 303 SS, 316 SS</i>) | |
| Circuit Form | SPST-NO, SPST-NC or SPDT | |
| Electrical Connection | See Order Chart Below for Options | |
| Diaphragm Material | Buna (Diaphragm Design) | |
| | Hardened Steel Piston (Piston Design) | |
| Cycle Life | 1 Million | |
| Operating Temperature | -20°F - +220°F | |
| Unit Weight | .33 lbs (noryl switch housing); .38 lbs (metal switch housing) | |

**CONTACT Airoyal to
create your own
custom CAD file**

How to Order (Example: Part Number: **CF - 1B - 750R / EL**)

| | | | | | | | | | |
|----|---|---|----|---|---|---|---|---|---|
| CF | - | 1 | B | - | 7 | 5 | 0 | R | / |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | </ | | | | | | |

Electrical Options

- WL** Wire Leads 18"
- EL** Male Conduit 1/2" — 14
- EF** Female Conduit 1/2" — 14
- HR** DIN43650A Connector
- HH** DIN43650A Plug Only
- WP** Weather Pack
- MP** Metri-Pack
- WD** Deutsch
- AT** 10 A @ 125/250 VAC
5 A @ 30 VDC
- AU** Gold Plate/Alloy for low currents

For more [media connections](#), see pages 23-24.


For all available [optional configurations](#), see page 22.

For more [electrical connections](#), see page 7.

VACUUM SWITCHES



- 1" to 29" vacuum models available
- Long-life elastomer diaphragms
- High-quality snap-action design
- Factory preset or field adjustable
- Over one million operating cycles
- 100% tested for accuracy
- NEMA 4 and 13 available

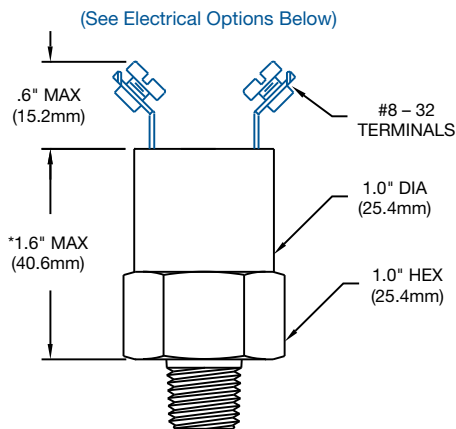

UL US CE RoHS

Features


- Long-life elastomer diaphragm
- High-quality snap-action switch
- Factory preset
- Available in a wide range of configurations
- Economical
- NEMA 4, 13

Operating Specifications

| | | |
|----------------------------|--|--------------------------|
| Set Point Range | 4" — 29" Hg | (102mm — 736mm Hg) |
| Set Point Tolerance | ±2" Hg | (50mm Hg) |
| Maximum Operating Pressure | 250 PSI | (17 Bar) |
| Differential | 20 — 40% | |
| Current Rating | 5 A @ 250 VAC | 5 A @ 30 VDC (Resistive) |
| Media Connection | Standard: Brass (Optional: Aluminum, Nickel Plating, Delrin, 303 SS, 316 SS) | |
| Circuit Form | SPST-NO, SPST-NC or SPDT | |
| Electrical Connection | See Order Chart Below for Options | |
| Diaphragm Material | Buna N | |
| Cycle Life | 1 Million | |
| Operating Temperature | -20°F - +220°F | |
| Unit Weight | .16 lbs | |

CONTACT Airoyal to create your own custom CAD file

How to Order (Example: Part Number: **VM - 11A - 10R / WP**)

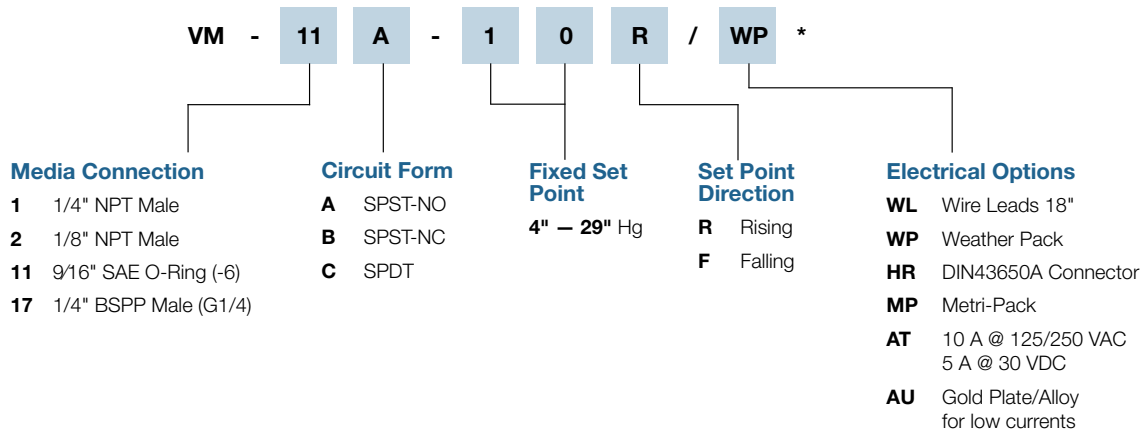


* Defaults to Screw Terminals

For more **media connections**, see pages 23-24.

For all available **optional configurations**, see page 22.

For more **electrical connections**, see page 7.

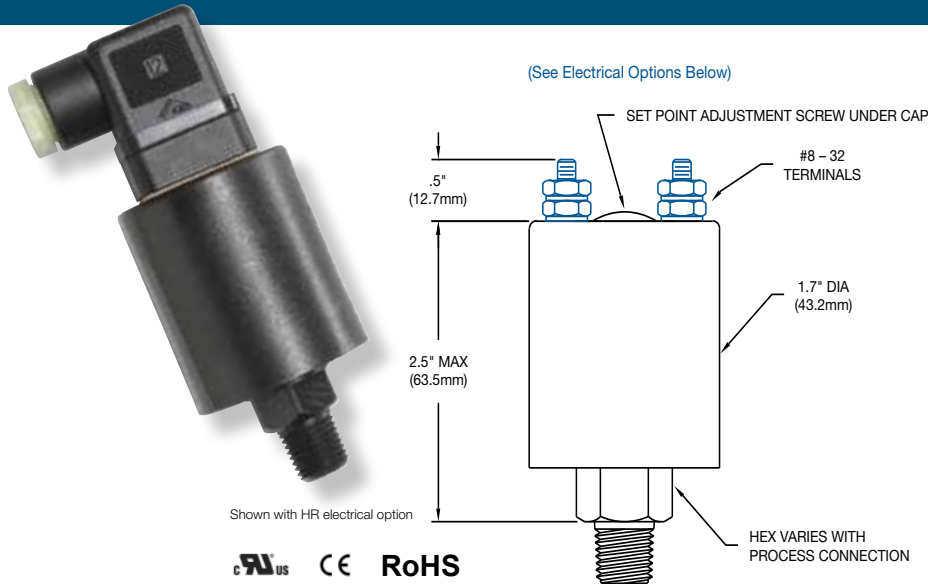

Features

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Factory preset or field adjustable
- Available in a wide range of configurations
- Economical
- NEMA 4, 13

Operating Specifications

| | | |
|-----------------------------------|--|--------------------------|
| Set Point Range | 3" — 29" Hg | (76mm — 736mm Hg) |
| Set Point Tolerance | ±2" Hg | (50mm Hg) |
| Maximum Operating Pressure | 250 PSI | (17 Bar) |
| Differential | 20 — 40% | |
| Current Rating | 5 A @ 250 VAC | 5 A @ 30 VDC (Resistive) |
| Media Connection | Standard: Brass (Optional: Aluminum, Nickel Plating, Delrin, 303 SS, 316 SS) | |
| Circuit Form | SPST-NO, SPST-NC or SPDT | |
| Electrical Connection | See Order Chart Below for Options | |
| Diaphragm Material | Buna N | |
| Cycle Life | 1 Million | |
| Operating Temperature | -20°F - +220°F | |
| Unit Weight | .48 lbs | |

CONTACT Airoyal to create your own custom CAD file

How to Order (Example: Part Number: NV- 1A - 20R / QC)

| NV - 1 A - 2 0 R / QC * | | | | |
|----------------------------|--------------|------------------|----------------------|---------------------------------------|
| Media Connection | Circuit Form | Adjustment Range | Set Point Direction | Electrical Options |
| 1 1/4" NPT Male | A SPST-NO | 3" — 12" Hg | R Rising | WL Wire Leads 18" |
| 3 3/4" UNF SAE O-Ring (-8) | B SPST-NC | 8" — 29" Hg | F Falling | WP Weather Pack |
| 17 1/4" BSPP Male (G1/4) | C SPDT | | J Rising Adjustable | HR DIN43650A Connector |
| | | | G Falling Adjustable | MP Metri-Pack |
| | | | | AT 10 A @ 125/250 VAC 5 A @ 30 VDC |
| | | | | AU Gold Plate/Alloy for low currents |

* Defaults to Screw Terminals


For more [media connections](#), see pages 23-24.

For all available [optional configurations](#), see page 22.

For more [electrical connections](#), see page 7.



(See Electrical Options Below)

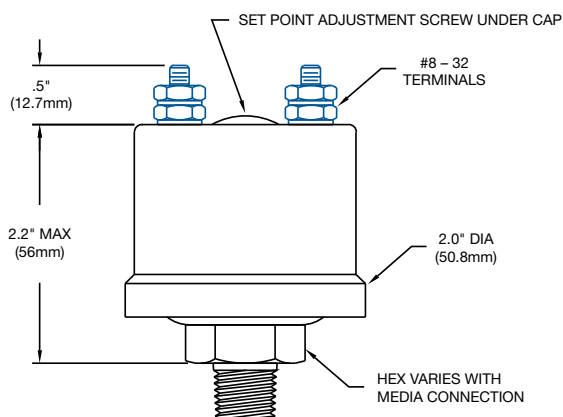

UL US CE RoHS

Features

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Factory preset or field adjustable
- Available in a wide range of configurations
- Economical
- NEMA 4, 13

Operating Specifications

| | | |
|----------------------------|-----------------------------------|---|
| Set Point Range | 1" — 29" Hg | (25mm — 736mm Hg) 14" — 394" H ₂ O |
| Set Point Tolerance | ±2" Hg | (50mm Hg) |
| Maximum Operating Pressure | 250 PSI | (17 Bar) |
| Differential | 20 — 40% | |
| Current Rating | 10 A @ 125/250 VAC | 5 A @ 30 VDC |
| Media Connection | Zinc Plated Steel | |
| Circuit Form | SPST-NO, SPST-NC or SPDT | |
| Electrical Connection | See Order Chart Below for Options | |
| Diaphragm Material | Buna N | |
| Cycle Life | 1 Million | |
| Operating Temperature | -20°F - +220°F | |
| Unit Weight | .43 lbs | |

**CONTACT Airoyal to
create your own
custom CAD file**

How to Order (Example: Part Number: **VP - 1A - 25R / MP**)

| VP - 1 A - 2 5 R / MP * | | | | |
|---------------------------------|------------------|--|-----------------------------|--|
| Media Connection | Circuit Form | Adjustment Range | Set Point Direction | Electrical Options |
| 1 1/4" NPT Male | A SPST-NO | 1" — 5" Hg (14" — 70" H₂O) | R Rising | WL Wire Leads 18" |
| 11 9/16" SAE O-Ring (-6) | B SPST-NC | 4" — 15" Hg (55" — 200" H₂O) | F Falling | WP Weather Pack |
| 13 1/2" SAE O-Ring (-5) | C SPDT | 10" — 29" Hg (140" — 394" H₂O) | J Rising Adjustable | HR DIN43650A Connector |
| 17 1/4" BSPP Male (G1/4) | | | G Falling Adjustable | MP Metri-Pack |
| | | | | AH 25 A @ 277 VAC 5 A @ 30 VDC |
| | | | | AU Gold Plate/Alloy for low currents |

* Defaults to Screw Terminals

For more [media connections](#),
see pages 23-24.

For all available [optional configurations](#),
see page 22.

For more [electrical connections](#),
see page 7.

Pressure / Vacuum Switch Part Number Configuration


(Complete open boxes only. Shaded boxes should have been previously completed on individual switch pages.)

**CONTACT Airoyal to
create your own
custom CAD file**

Wire Length Settings

- 1 3" Wire Length
- 2 6" Wire Length
- 3 12" Wire Length
- 4 18" Wire Length
- 5 24" Wire Length
- 6 36" Wire Length
- 7 48" Wire Length
- 8 60" Wire Length
- 9 Special Wire Length

Variant #*

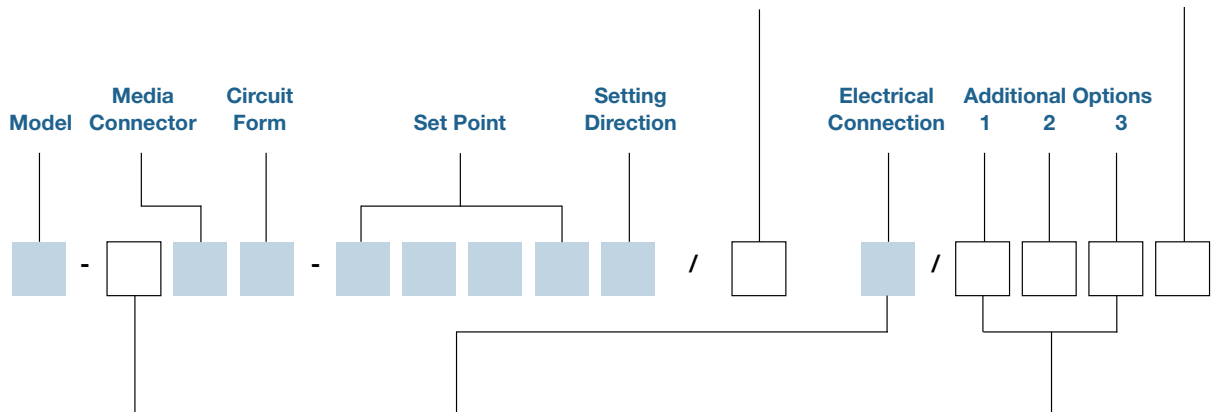

Media Connection Modifier

- A** Aluminum
- B** Brass
- N** Nickel Plating
- P** Delrin
- S** Zinc Plated Steel
- T** 303 Stainless Steel
- U** 316 Stainless Steel

Electrical Connection

- HF** DIN43650A 1/2" Conduit (Plug & Receptacle)
- HH** DIN43650A (Plug Only)
- HR** DIN43650A Strain Relief (Plug & Receptacle)
- HP** 9.4mm DIN (Plug Only)
- HM** 9.4mm DIN (Plug & Receptacle)
- MP** Metri-Pack Female 280 Series Sealed (Nason Standard)
- NP** Metri-Pack Male 280 Series Sealed
- CP** Metri-Pack Female 150 Series Sealed
- DP** Metri-Pack Male 150 Series Sealed
- PP** Boot (Military Connector)
- QC** 1/4" Male Spade Quick Connect
- WL** Wire Leads
- WP** Weather Pack (Female)
- TP** Weather Pack (Male)
- EL** 1/2" NPT Male Conduit
- EF** 1/2" NPT Female Conduit
- WD** Deutsch Receptacle (DT04)
- PD** Deutsch Plug (DT06)
- HL** Lighted DIN (Plug & Receptacle)
- PT** 10 — 32 Post
- ES** M12 - 4PIN
- CL** Sheathed 18 AWG
- SL** SJO Cable

Additional Options

1. Diaphragms

- BL** Buna 50 Durometer
- BT** Buna 431T
- EP** EP 559 PE
- FS** Fluorosilicone
- GJ** Viton 514 GJ
- HJ** HNBR, 574 HJ
- NE** Neoprene
- SI** 71418 Silicone 80 DUR
- VT** Viton 514 AD
- YP** Viton 514 YP

2. Contacts**

- AT** 10 A @ 125/250 VAC
5 A @ 30 VDC
- AU** Gold Plate/Alloy
for low currents
- AH** 25 A @ 277 VAC
5 A @ 30 VDC

3. Other

- VL** Convolute
(for wire leads)
- GG** Internal Ground
- NF** NSF Approved

* Variant # identifies this configuration as unique to a specific customer or application.

** Ask about our new environmentally sealed snap-action switch.

Pressure / Vacuum Switches

| Option | Base Thread Size* | SM | MM | LM | CJ | XM | WX | CD | VM | NV | VP |
|--------|--|----|----|----|----|----|----|----|----|----|----|
| 1 | 1/4 — 18 NPT Male | • | • | • | • | • | • | • | • | • | • |
| 2 | 1/8 — 27 NPT Male | • | • | • | • | • | • | • | • | • | |
| 3 | 3/4 — 16 UNF SAE O-Ring (-8) | • | • | | • | • | • | • | • | • | |
| 4 | 7/16 — 20 37° JIC Flare (-4) | | | • | | • | • | | | | |
| 5 | 1/4 — 18 NPT Female | • | • | | | • | • | • | | | |
| 6 | 7/16 — 20 O-Ring J514 (-4) | • | • | • | • | • | • | • | | • | • |
| 7 | 1/4 — 18 NPT Female (Obsolete) See Option 5 | | | | | | | | | | |
| 8 | 1/8 — 27 NPT Female | • | • | | | • | • | | • | • | • |
| 9 | 3/8 — 18 NPT Male | • | • | • | • | • | • | • | • | | |
| 10 | 1/4 Female Stainless Steel (Obsolete) See Option 5 | | | | | | | | | | |
| 11 | 9/16 — 18 SAE J514 O-Ring (-6) | • | • | • | • | • | • | • | • | | • |
| 12 | M10 x 1 SAE J2244-3 O-Ring | • | • | • | • | • | • | | | | |
| 13 | 1/2 — 20 UNF SAE O-Ring (-5) | • | • | | | • | • | • | • | | • |
| 14 | 1/2 NPT Male 1/8 NPT Female | • | • | | | | | | | • | |
| 15 | 7/16 — 20 Female SAE O-Ring (-4) | | | | | • | • | • | | | |
| 16 | 7/16 — 20 Female SAE J 514 37 DEG | | | • | | • | • | | | | |
| 17 | 1/4 BSPP Male (G1/4) | • | • | • | • | • | • | • | • | • | • |
| 18 | 7/16 — 20 SAE J1926 O-Ring (Adjustable) | | | | | • | • | | | | |
| 19 | 1/8 BSPT JIS (R1/8) | • | • | • | | • | • | | | | |
| 20 | Tri-Clover | | | | | • | • | | | | |
| 21 | 1/4 BSPP Extended (G1/4) | • | • | | | • | • | | • | | |
| 22 | 1/2 — 14 NPT Brass Male (IS Only) | | | | | | | | | | |
| 23 | 1/4 — 18 NPT SS Female (IS Only) | | | | | | | | | | |
| 24 | 10/32 INT 3/8 — 24 EXT | • | • | | | | | | | | |
| 25 | 1/4 NPT Plastic (Obsolete) See Option 1 | | | | | | | | | | |
| 26 | 9/16 — 18 Female 37 DEG SAE J 514 (-6) | | | • | | • | • | • | | | |
| 27 | 1/2 BSPT — Male (R1/2) | • | • | | | | | | • | | |
| 28 | 1/8 BSPP (G1/8) | • | • | | • | | | | | | |
| 29 | 3/8 — 24 SAE O-Ring J514 (-3) | • | • | | | • | • | | | | |
| 30 | 1/4 BSPT (JIS) (R1/4) | • | • | | | | | • | • | | |
| 31 | Flange (NS Only) | | | | | | | | | | |
| 32 | M12 — 1.5 Metric | • | • | | | | | | | | |
| 33 | NO LONGER AVAILABLE | | | | | | | | | | |
| 34 | 7/16 — 20 MS33649 Female* | | | | | • | • | | | | |
| 35 | 1/2 — 14 NPT (Male) | • | • | • | | • | • | | | | |
| 36 | 9/16 — O-Ring Ext Boss (-6) | | | • | | • | • | | | | |
| 37 | 3/8 — 24 2A Inverted Flare | • | • | • | | | | | | | |
| 38 | 9/16 — 12 UNC (SR Only) | • | • | | | | | • | | • | |
| 39 | 1/4 — 18 NPTF SAE J516 (-4) | | | | | • | • | • | | | |
| 40 | M10X1 SAE J2244-3 (Obsolete) See Option 12 | | | | | | | | | | |
| 41 | 7/16 — 20 Internal 45° Flare — SAE J 513 | • | • | | | | | | • | | |
| 42 | 9/16 — 18 SAE J1926 O-Ring (Adjustable) | | | | | | | | | | |
| 43 | M10 x 1 SAE J2244-3 Extended | • | • | | | | | | | | |
| 44 | 1/4 — 18 NPT Female Extended | | | | | • | • | | | | |
| 45 | 9/16 — 18 Female SAE J514 O-Ring (-6) | | | | | • | • | | | | |
| 46 | 1/8 NPT Male Clipped Hex | • | • | | | | | | | | |
| 47 | 1/4 — 19 BSPP Female (G1/4) | | | | | • | • | | | | |

*Call Nason at **800.229.4955** if you don't see the media connection that fits your application. **Note:** Consult factory for materials and stock.

Pressure / Vacuum Switches

| Option | Base Thread Size* | SM | MM | LM | CJ | XM | WX | CD | VM | NV | VP |
|--------|--|----|----|----|----|----|----|----|----|----|----|
| 48 | 9/16 — 18 SAE J514 O-Ring (-6) | | | | | | | | | | • |
| 49 | M14 x 1.5 J2244/3 O-Ring | • | • | • | | • | • | • | | | |
| 50 | .302 — 32 Female | • | • | | | | | | | | |
| 51 | M14 x 1.5 (19mm Hex) | | | • | | | | | | | |
| 52 | 3/8 — 24 UNF W/ 1/4 BARB | • | • | | | | | | | | |
| 53 | M12 x 1.5 SAE J2244/3 O-Ring | • | • | • | | • | • | • | | | |
| 54 | 1-1/8 Hex 1/4 NPT | | | | | • | • | | | | |
| 55 | 1/2 BSPP (G1/2) | | | | | • | • | | | | |
| 56 | M10 x 1 Metric Pipe Thread | • | • | | | • | • | | | | |
| 57 | 7/16 — 20 1-1/8 Hex | | | | | • | • | | | | |
| 58 | 9/16 — 18 1-1/8 Hex | | | | | • | • | | | | |
| 59 | 1-11 — 1/2 NPT | | | | | | | | | | |
| 60 | 1/4 SAE J513 Female Flare Deflator | • | • | | | • | • | | • | | |
| 61 | 9/16 — 18 SAE J514 37° Male | | | | | • | • | • | | | |
| 62 | NO LONGER AVAILABLE | | | | | | | | | | |
| 63 | 1/2 — 20 Extended | • | • | | | | | | | | |
| 64 | 3/8 — 19 BSPP (G3/8) | • | • | | | | | | | | |
| 65 | 3/4 — 14 NPT Male | | | • | | | | | | | |
| 66 | 1/4 Tube Plastic | • | | | | | | | | | |
| 67 | 9/16 — 18 SAE J1453 O-Ring Face Seal (-4) | | | • | | • | • | • | | | |
| 68 | 9/16 — 18 SAE O-Ring Face Seal (Female) | | | • | | • | | | | | |
| 69 | 11/16 — 16 SAE J1453 O-Ring Face Seal (-6) | | | | | • | • | • | | | |
| 70 | M10 x 1.25 Female Flare Deflator | • | • | | | | | | | | |
| 71 | DX Face Seal Mount | | | | | | | | | | |
| 72 | 11/16 — 16 SAE O-Ring Face Seal (Female) | | | • | | | | | | | |
| 73 | M18 x 1.5 SAE J2244/3 O-Ring | | | | | | | • | | | |
| 74 | Special SM/MM Port Seal | • | • | | | | | | | | |
| 75 | 1/8 — 27 Straight with 1/8 Barb | | | | | | | | | • | |
| 76 | M8 x 1 SAE J2244-2 O-Ring | • | • | | | | | | | | |
| 77 | M16 x 1.5 SAE J2244-3 O-Ring | • | • | | | | | | | | |
| 78 | M16 x 1.0 | | | | | | | • | | | |
| 79 | M14 x 1.5 For Washer Seal | | | | | | | | | | |
| 80 | 3/8 O-Ring Port Seal | • | • | | | | | | | | |
| 81 | 3/8 — 24 J512 (-3) 45° Flare | | | | | • | | | | | |
| 82 | 5/16 — 24 For #13 O-Ring Seal | • | • | | | | | | | | |
| 83 | M9 X 1.25 6G | | | | | • | | | | | |
| 84 | 3/8 — 24 UNF 2A (-3) 37° Flare | • | • | | | | | | | | |
| 85 | M10 X 1 DIN 3852 Type B | | | • | | | | | | | |
| 86 | 3/4 — 14 Male 1/4 — 18 NPT Female | | | | | | | | | | |
| 87 | Top Manifold Mount (Seal) | • | • | | | | | | | | |
| 88 | M16 X 1.5 For Copper Washer Seal | • | • | | | | | | | | |
| 89 | M16 O-Ring Port Seal | • | • | | | | | | | | |
| 90 | Stoelting Flange | • | | | | | | | | | |
| 91 | 1/2 NPT Male 1/4 NPT Female | • | • | | | • | | | | | |
| 92 | 3/8 BSPT (R3/8) | • | • | | | • | | | | | |
| 93 | 7/16 — 20 For Washer Seal | | | • | | | | | | | |

*Call Nason at **800.229.4955** if you don't see the media connection that fits your application. **Note:** Consult factory for materials and stock.

Pressure / Vacuum Switches

So we can better meet your application needs, please take a moment to fill out this operation specifications form. Nason will provide a sample to your specifications.

1 Maximum Operating Pressure: _____

2 Media: _____

3 Set Point: Rising _____ Falling _____

 Rising Adjustable _____ Falling Adjustable _____

4 Circuit Form: ☐ SPST-NO ☐ SPST-NC ☐ SPDT

5 Differential: _____

6 Circuit: Electrical ☐ AC _____ V ☐ DC _____ V

 Load (Amps) _____ ☐ Resistive ☐ Inductive Inrush _____

7 Media Connection: _____

8 Electrical Connection: _____

9 Temperature: Media _____ °F Ambient _____ °F

10 Cycles: _____ per hour Other (describe): _____

11 Other Special Requirements (attach separate sheet if necessary): _____

12 System: ☐ New Design ☐ Redesign

13 Application: What will switch control? (Attach circuit diagrams if available) _____

14 Prototype(s) Required by (Date): _____

15 Estimated Annual Usage: _____ Target Net Price: _____

Firm: _____


Address: _____

Project Number or Name: _____


Name & Title: _____ Phone: _____

Email Address: _____


TEMPERATURE SWITCHES

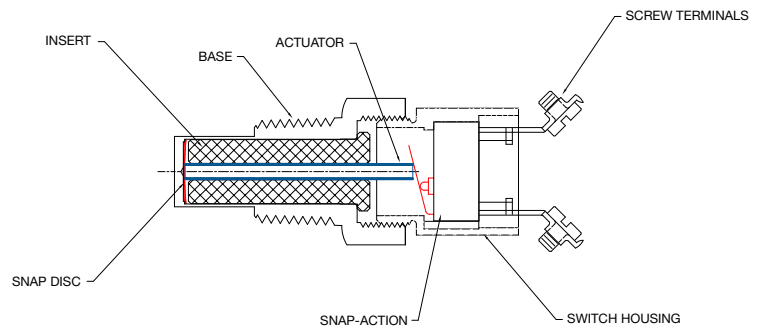

SNAP DISC THERMOSTAT DESIGN

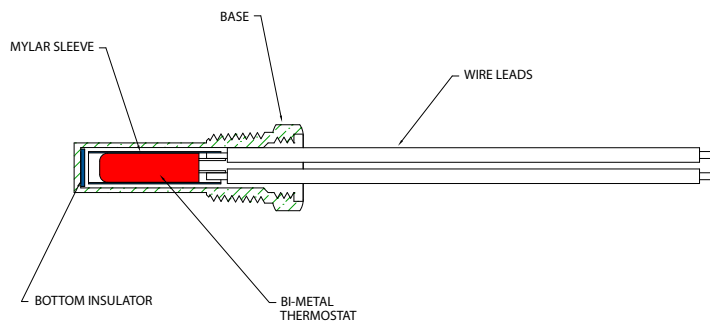


BI-METAL THERMOSTAT DESIGN

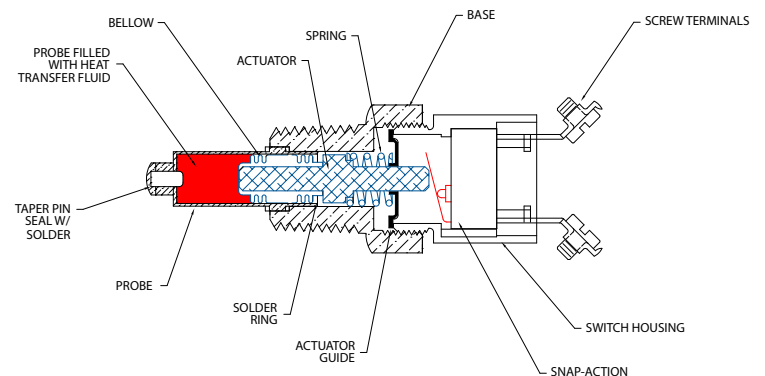


BELLOWS THERMOSTAT DESIGN

- Models TT, TD, TM, and HT
- TT – Bi-metal immersion temperature switch for low voltage/low current applications
- TD – Snap disc design for high reliability with shock and vibration
- TM and HT – Bellows design for high reliability with shock and vibration
- Available in a wide range of configurations
- NEMA 4 and 13 available
- 100% tested for accuracy

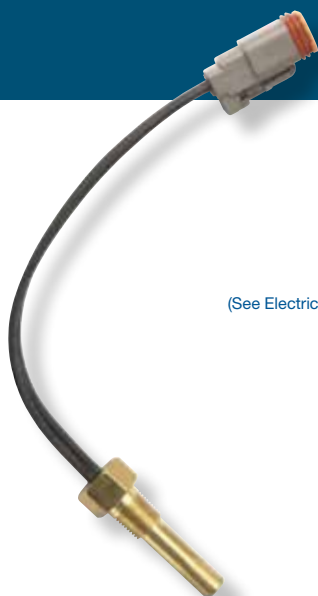

(See Electrical Options Below)

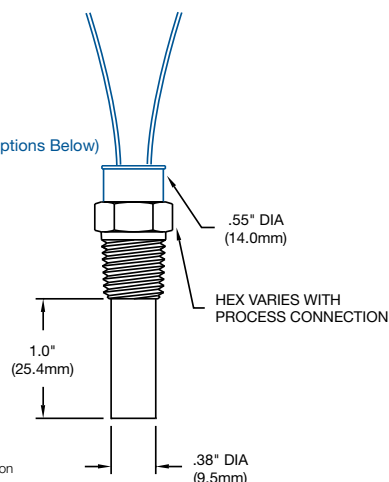

Shown with PD electrical option

UL **CE** **RoHS**

Features

- Bi-metal immersion temperature switch
- Factory preset temperature
- Direct action contacts/minimum hysteresis
- Gold diffused, fine silver contacts
- Available in a wide range of configurations
- Economical and compact
- NEMA 4, 13

Operating Specifications

| | | |
|---------------------------|---|--------------------------|
| Set Point Range | 40° — 300°F | (4° — 149°C) |
| Set Point Tolerance | ±5°F | (2.8°C) |
| Maximum Temperature | 325°F | (163°C) |
| Current Rating | 3 A @ 240 VAC | 2 A @ 24 VDC (Resistive) |
| Probe Length | 1" | |
| Media Connection | Standard: Brass (<i>Optional: 303 SS, 316 SS</i>) | |
| Circuit Form | SPST-NO or SPST-NC | |
| Electrical Connection | See Order Chart Below for Options | |
| Maximum External Pressure | 5000 PSI | |
| Unit Weight | .09 lbs | |
| Installation Torque | 15 ft lbs | |
| | Smaller than 3/8" NPT Male = 5 — 10 ft lbs | |

**CONTACT Airoyal to
create your own
custom CAD file**


How to Order (Example: Part Number: **TT - D3A - 100R / WL**)

| TT - D 3 A - 1 0 0 R / WL * | | | | | | |
|-----------------------------|------------------------|--------------|---------------------------------|---------------------|-------------------------------|--|
| Probe Length | Media Connection | Circuit Form | Fixed Set Point | Set Point Direction | Electrical Options | |
| D 1/2" | 1 1/2" NPT Male | A SPST-NO | 40°F — 300°F (5° Increments) | R Rising | WL Wire Leads 6" | |
| E 3/4" | 2 3/8" NPT Male | B SPST-NC | | F Falling | QC 1/4" Spade Connection | |
| F 1" | 3 1/4" NPT Male | | | | WP Weather Pack | |
| H 1-1/2" | 5 3/4" SAE O-Ring (-8) | | | | MP Metri-Pack | |
| J 2" | 6 M16 x 1.5 | | | | GG Internal Ground | |
| | 13 1/4" NPT (316SS) | | | | * Defaults to Screw Terminals | |
| | 35 M12 x 1.5 | | | | | |
| | 46 M14 x 1.25 | | | | | |

For more [media connections](#),
see pages 32-33.

For all available [optional configurations](#),
see page 34.

For more [electrical connections](#),
see page 7.

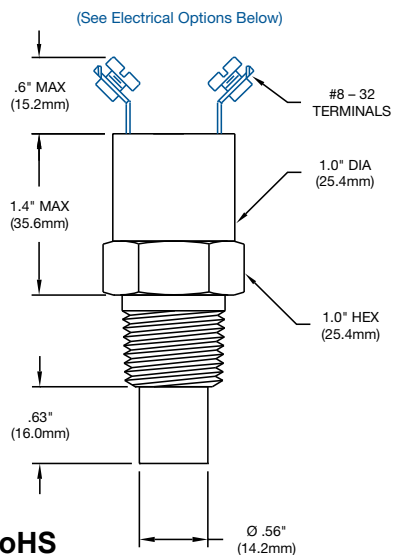

UL US CE RoHS

Features

- Utilizes snap disc approach to sense temperature
- High-quality snap-action switch
- Factory preset
- Shock and vibration resistant
- Available in a wide range of configurations
- Economical
- NEMA 4, 13

Operating Specifications

| | | |
|-------------------------------|---|--------------------------|
| Set Point Range | 150° — 300°F | (65° — 149°C) |
| Set Point Tolerance | ±5°F | (2.8°C) |
| Maximum Operating Temperature | 325°F | (163°C) |
| Differential | 8 — 16°F | |
| Current Rating | 5 A @ 250 VAC | 5 A @ 30 VDC (Resistive) |
| Media Connection | Standard: Brass (<i>Optional: 303 SS, 316 SS</i>) | |
| Circuit Form | SPST-NO, SPST-NC or SPDT | |
| Electrical Connection | See Order Chart Below for Options | |
| Maximum External Pressure | 2500 PSI | |
| Unit Weight | .21 lbs | |
| Installation Torque | 15 ft lbs | |
| | Smaller than 3/8" NPT Male = 5 — 10 ft lbs | |

**CONTACT Airoyal to
create your own
custom CAD file**

How to Order (Example: Part Number: **TD - 1C - 175R / WP**)


| Media Connection | Circuit Form | Fixed Set Point | Set Point Direction | Electrical Options |
|--|---|---|---------------------|---|
| 1 1/2" NPT Male 2 3/8" NPT Male 5 3/4" SAE O-Ring (-8) 17 M18 x 1.5 SAE J2244 23 1/2" BSPT (R1/2) 38 9/16" SAE-6 J514 | A SPST-NO B SPST-NC C SPDT | 150°F — 300°F (5° Increments) | R Rising | QC 1/4" Spade Connection WL Wire Leads 18" WP Weather Pack HR DIN43650A Connector MP Metri-Pack WD Deutsch AT 10 A @ 125/250 VAC 5 A @ 30 VDC AU Gold Plate/Alloy for low currents |

* Defaults to Screw Terminals

For more [media connections](#),
see pages 32-33.

For all available [optional configurations](#),
see page 34.

For more [electrical connections](#),
see page 7.

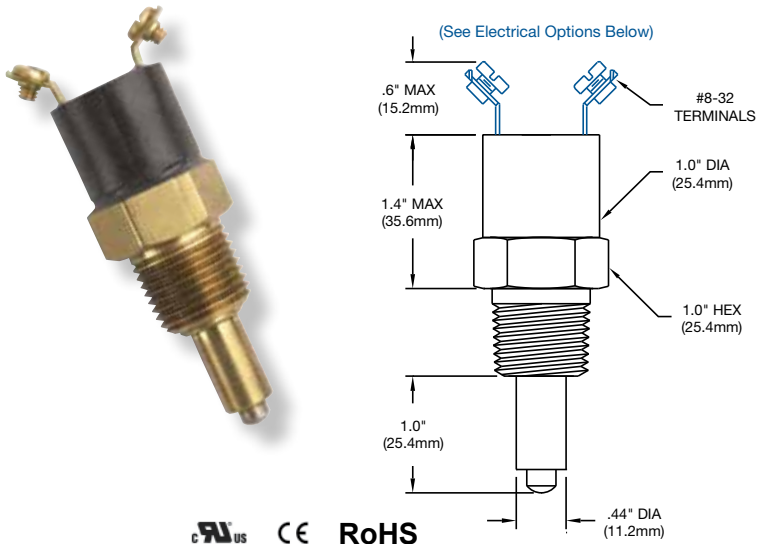

Features

- Utilizes bellows mechanism to sense temperature
- High-quality snap-action switch
- Factory preset
- Shock and vibration resistant
- Available in a wide range of configurations
- NEMA 4, 13

Operating Specifications

| | | |
|-------------------------------|---|--------------------------|
| Set Point Range | 40° — 300°F | (4° — 149°C) |
| Set Point Tolerance | ±5°F | (2.8°C) |
| Maximum Operating Temperature | 100°F above set point (325°F max) | |
| Differential | 8 — 16°F | |
| Current Rating | 5 A @ 250 VAC | 5 A @ 30 VDC (Resistive) |
| Media Connection | Standard: Brass (<i>Optional: 303 SS, 316 SS</i>) | |
| Circuit Form | SPST-NO, SPST-NC or SPDT | |
| Electrical Connection | See Order Chart Below for Options | |
| Maximum External Pressure | 500 PSI | |
| Unit Weight | .19 lbs | |
| Installation Torque | 15 ft lbs | |
| | Smaller than 3/8" NPT Male = 5 — 10 ft lbs | |

CONTACT Airoyal to create your own custom CAD file

How to Order (Example: Part Number: **TM - 6A - 120R / WL**)


| TM - 6 A - 1 2 0 R / WL * | | | | |
|--------------------------------|------------------|--|---------------------|--|
| Media Connection | Circuit Form | Fixed Set Point | Set Point Direction | Electrical Options |
| 1 1/2" NPT Male | A SPST-NO | 40°F — 300°F (5° Increments) | R Rising | WL Wire Leads 18" |
| 2 3/8" NPT Male | B SPST-NC | | F Falling | QC 1/4" Spade Connection |
| 6 M16 x 1.5 | C SPDT | | | WP Weather Pack |
| 7 1/2" BSPP Male (G1/2) | | | | HR DIN43650A Connector |
| 16 3/8" — 19 BSPT/JIS | | | | MP Metri-Pack |
| 27 M22 x 1.5 SAE J2244 | | | | AT 10 A @ 125/250 VAC 5 A @ 30 VDC |
| 45 1/2" BSPP 303 SS | | | | GG Internal Ground |
| | | | | AU Gold Plate/Alloy for low currents |

* Defaults to Screw Terminals

For more [media connections](#), see pages 32-33.

For all available [optional configurations](#), see page 34.

For more [electrical connections](#), see page 7.

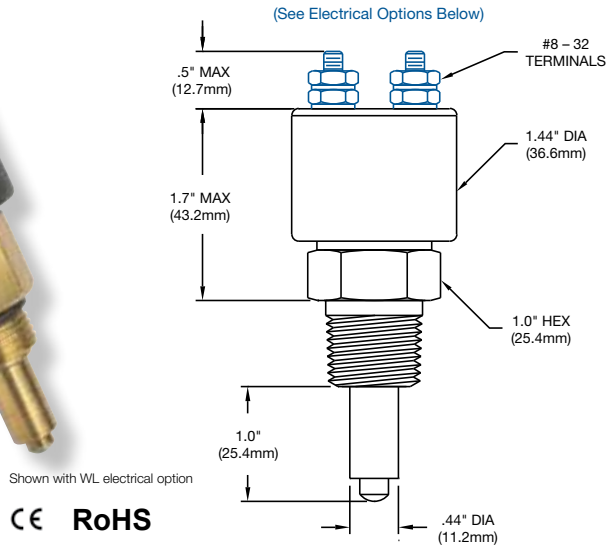

CE RoHS

Features

- Utilizes bellows mechanism to sense temperature
- High-quality snap-action switch
- Factory preset
- Shock and vibration resistant
- Available in a wide range of configurations
- NEMA 4, 13

Operating Specifications

| | | |
|-------------------------------|---|--------------|
| Set Point Range | 40° — 300°F | (4° — 149°C) |
| Set Point Tolerance | ±5°F | (2.8°C) |
| Maximum Operating Temperature | 100°F above set point (325°F max) | |
| Differential | 8 — 16°F | |
| Current Rating | 10 A @ 125/250 VAC | 5 A @ 30 VDC |
| Media Connection | Standard: Brass (<i>Optional: 303 SS, 316 SS</i>) | |
| Circuit Form | SPST-NO, SPST-NC or SPDT | |
| Electrical Connection | See Order Chart Below for Options | |
| Maximum External Pressure | 500 PSI | |
| Unit Weight | .23 lbs | |
| Installation Torque | 15 ft lbs | |
| | Smaller than 3/8" NPT Male = 5 — 10 ft lbs | |

CONTACT Airoyal to create your own custom CAD file

How to Order (Example: Part Number: HT - 2A - 100R / WL)


| Media Connection | | Circuit Form | | Fixed Set Point | | Set Point Direction | | Electrical Options | |
|------------------|-----------------------|--------------|---------|---------------------|-----------------|---------------------|---------|--------------------|-----------------------------------|
| 1 | 1/2" NPT Male | A | SPST-NO | 40°F — 300°F | (5° Increments) | R | Rising | WL | Wire Leads 18" |
| 2 | 3/8" NPT Male | B | SPST-NC | | | F | Falling | QC | 1/4" Spade Connection |
| 6 | M16 x 1.5 | C | SPDT | | | | | WP | Weather Pack |
| 7 | 1/2" BSPP Male (G1/2) | | | | | | | HR | DIN43650A Connector |
| 16 | 3/8" — 19 BSPT/JIS | | | | | | | MP | Metri-Pack |
| 27 | M22 x 1.5 SAE J2244 | | | | | | | AH | 25 A @ 277 VAC 5 A @ 30 VDC |
| 45 | 1/2" BSPP 303 SS | | | | | | | GG | Internal Ground |
| | | | | | | | | AU | Gold Plate/Alloy for low currents |

* Defaults to Screw Terminals

For more [media connections](#), see pages 32-33.

For all available [optional configurations](#), see page 34.

For more [electrical connections](#), see page 7.

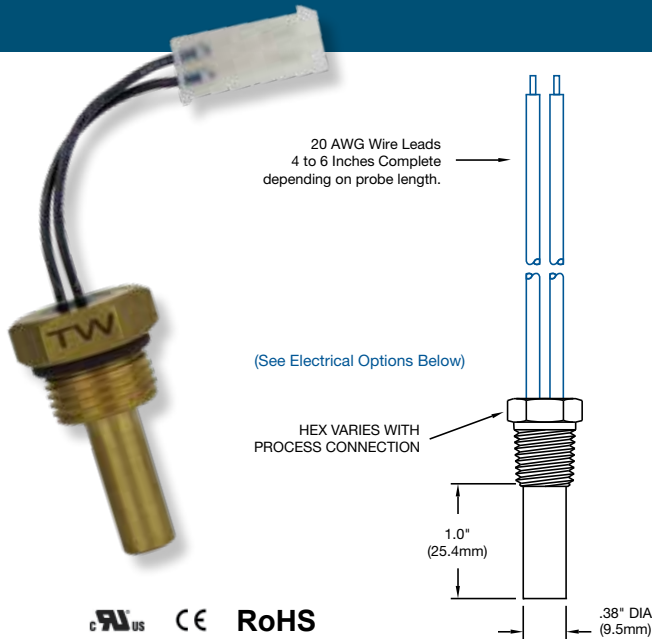

Features

- Snap action immersion temperature switch
- Factory preset temperature
- Hysteresis built in
- Available in a wide range of configurations
- Economical and compact
- NEMA 4, 13

UL US CE RoHS

Operating Specifications

| | | |
|---------------------------|---|---------------------------|
| Set Point Range | 120° — 285°F | (50° — 140°C) |
| Set Point Tolerance | ±5°F | (2.8°C) |
| Maximum Temperature | 325°F | (163°C) |
| Current Rating | 10 A @ 120 VAC | 5 A @ 240 VDC 4 A @ 12VDC |
| Differential | 30%C of the set point (<i>nominal</i>) | |
| Cycle Life | 10,000 cycles (<i>Depending on amp draw</i>) | |
| Probe Length | 1.0" standard | |
| Media Connection | Standard: Brass (<i>Optional: 303 SS, 316 SS</i>) | |
| Circuit Form | Normally close or normally open | |
| Electrical Connection | Wire leads standard - See options below | |
| Maximum External Pressure | 5000 PSI | |

**CONTACT Airoyal to
create your own
custom CAD file**

How to Order (Example: Part Number: **TW - F3A - 140R / WL**)

| TW - F 3 A - 1 4 0 R / WL * | | | | | | | |
|---|-------------------------------|------------------|----------------------|---------------------|----------------------------|--|--|
| Probe Length | Media Connection | Circuit Form | Fixed Set Point | Set Point Direction | Electrical Options | | |
| D 1/2" | 1 1/2" NPT Male | A SPST-NO | 120°F — 285°F | R Rising | WL Wire Leads | | |
| E 3/4" | 2 3/8" NPT Male | B SPST-NC | (5° Increments) | | QC 1/4" Disconnects | | |
| F 1" | 3 1/4" NPT Male | | | | WP Weather Pack | | |
| H 1-1/2" | 5 3/4" SAE O-Ring (-8) | | | | WD Deutsch DT04-2P | | |
| J 2" | 17 M18 x 1.5 SAE | | | | MP Metri-pack | | |
| | 26 M14 x 1.5 SAE | | | | | | |
| | 32 M16 x 1.5 SAE | | | | | | |

For more [media connections](#),
see pages 32-33.

For all available [optional configurations](#),
see page 34.

For more [electrical connections](#),
see page 7.

Temperature Switches

| Option | Base Thread Size* | TD | TM/HT | TT Model Probe Code | | | | | |
|--------|-------------------------------------|----|-------|---------------------|-----------------|---------------|-------------------|-------------------|---------------|
| | | | | D 1/2" Probe | E 3/4" Probe | F 1" Probe | G 1-1/4" Probe | H 1-1/2" Probe | J 2" Probe |
| 1 | 1/2 NPT Male | • | • | • | • | • | • | • | • |
| 2 | 3/8 NPT Male | • | • | • | • | • | | • | • |
| 3 | 1/4 NPT Male | | | • | • | • | | • | • |
| 4 | 3/8 NPT (1PC) | | • | | | | | | |
| 5 | 3/4 — 16 SAE O-Ring (-8) J514 | • | • | • | • | • | | • | • |
| 6 | M16 x 1.5 NON SAE | | • | • | • | • | | | • |
| 7 | 1/2 BSPP (G1/2) | • | • | | • | | | | • |
| 8 | 1/2 NPT (1PC) | | • | | | | | | |
| 9 | 3/8 NPT (Short) NON SAE | | • | | | | | | |
| 10 | M14 x 1.5 (Nickel Plated) NON SAE | | | | • | | | | |
| 11 | M14 x 1.5 NON SAE | | | | • | • | | | |
| 12 | 1/2 NPT (Nickel Plated) | | • | | | • | • | | |
| 13 | 1/4 NPT (316SS) | | | • | • | • | | | |
| 14 | 1/2 BSPP Extended | | • | | | | | | |
| 15 | 3/4 — 16 SAE O-Ring (-8) Short J514 | | • | | | | | | |
| 16 | 3/8 — 19 BSPT (R3/8) | • | • | • | | | • | | |
| 17 | M18 x 1.5 SAE J2244/3 O-Ring | • | • | • | • | • | | | |
| 18 | 1/4 NPT (Nickel Plated) | | | • | • | | | | |
| 19 | 1/2 NPT (316SS-1PC) | | • | | | | | | |
| 20 | 1/2 NPT (Very Short) | | • | | | | | | |
| 21 | 3/8 NPT (Very Short) | | • | | | | | | |
| 22 | M16 x 1.5 45° Flare | | | | • | | | | |
| 23 | 1/2 BSPT (R1/2) | • | • | | | • | | | |
| 24 | 1/2 NPT (316SS) | | | | | • | | | |
| 25 | 3/8 NPT (Nickel Plated) 1PC | | • | | | | | | |
| 26 | M14 x 1.5 SAE J2244/3 O-Ring | | | • | • | • | | | |
| 27 | M22 x 1.5 SAE J2244/3 O-Ring | • | • | | | • | | | |
| 28 | 1/4 — 19 BSPT (R1/4) | | | | • | | | | |
| 29 | 3/8 — 19 BSPP (G3/8) | | | | • | | | • | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

*Call Nason at **800.229.4955** if you don't see the media connection that fits your application. **Note:** Consult factory for materials and stock.

Temperature Switches


| Option | Base Thread Size* | TD | TM/HT | TT Model Probe Code | | | | | |
|--------|-------------------------------------|----|-------|---------------------|-----------------|---------------|-------------------|-------------------|---------------|
| | | | | D 1/2" Probe | E 3/4" Probe | F 1" Probe | G 1-1/4" Probe | H 1-1/2" Probe | J 2" Probe |
| 30 | 3/8 NPT (316SS) | | | • | • | • | | | |
| 31 | 3/4 — 16 UNF (304 SS) | | • | | | | | | |
| 32 | M16 x 1.5 (SAE) J2244/3 | | | | | | | | |
| 33 | 5/8 — 18 SAE J513 45° Flare | | | • | • | | | | |
| 34 | 1/2 NPT (Short) Male | | • | | | | | | |
| 35 | M12 x 1.5 SAE J2244/3 | | | • | | • | | | |
| 36 | 3/4 — 16 SAE O-Ring (Nickel Plated) | | | | | | | | |
| 37 | M14 x 1.5 Taper Thread | | | | | | | | |
| 38 | 9/16 — 18 SAE J514 O-Ring (-6) | • | | • | • | • | • | • | • |
| 39 | M16 x 2.0 | | | • | | | | | |
| 40 | 1/2 — 20 UNF SAE J514 O-Ring (-5) | | | • | | • | | | |
| 41 | 3/8 — 24 SAE J514 O-Ring (-3) | | | • | | | | | |
| 42 | 1/8 NPT Male | | | • | | • | | | |
| 43 | 1/4 — 19 BSPP (G1/4) | | | • | | • | | | |
| 44 | M16 x 1.5 303 SS | | | | | • | | | |
| 45 | 1/2 BSPP 303 SS (G1/2) | • | • | | | | | | |
| 46 | M14 x 1.25 | | | | | • | | | |
| 47 | M16 x 1.5 45° Flare | | | • | | • | | | |
| 48 | 7/16 — 20 SAE J514 O-Ring (-4) | | | • | | • | | | |
| 49 | 1 1/16 — 12 SAE J514 O-Ring (-12) | • | | • | | | | | |
| 50 | 1/8 — 28 BSPT (R1/8) | | | • | | | | | |
| 51 | M20X 1.5 Taper | | | | | | | | |
| 52 | 3/8 NPT 303 SS Male | | | | | | | | |
| 53 | M16 X 1.5 For Washer | | | • | • | • | | • | • |
| 54 | M10 X 1.5 | | | | | | | | |
| 55 | 1/8 — 28 BSPP (G 1/8) | | | • | | | | | |
| 56 | M12 x 1.5 For Washer | | | • | | | | | |
| 57 | 3/8 — 19 BSPP Washer (G3/8) | | | • | | | | | |
| 58 | 1/4 — 19 BSPP (G1/4) 316 SS | | | | | • | | | |
| 59 | 7/8 — 14 SAE J514 O-Ring (-10) | | • | | | | | | |
| 60 | 3/4 — 16 SAE J514 O-Ring (-8) | | • | | | | | | |
| 61 | M10 x 1.0 | | | | | | • | | |
| 62 | 3/4 — 16 for Washer Seal | | | • | | | | | |

*Call Nason at **800.229.4955** if you don't see the media connection that fits your application. **Note:** Consult factory for materials and stock.

Temperature Switch Part Number Configuration

(Complete open boxes only. Shaded boxes should have been previously completed on individual switch pages.)

**CONTACT Airoyal to
create your own
custom CAD file**

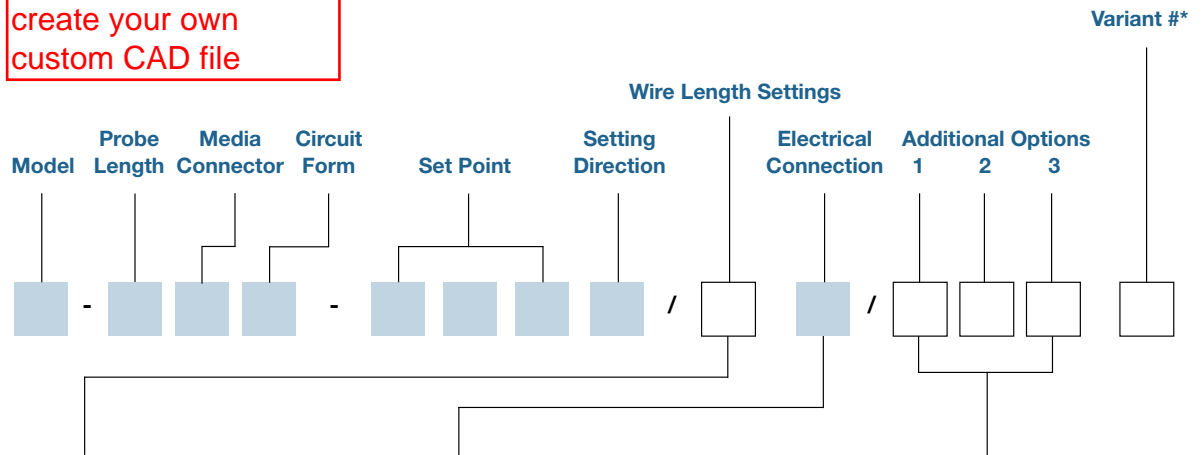

Wire Length Settings

- 1 3" Wire Length
- 2 6" Wire Length
- 3 12" Wire Length
- 4 18" Wire Length
- 5 24" Wire Length
- 6 36" Wire Length
- 7 48" Wire Length
- 8 60" Wire Length
- 9 Special Wire Length

Electrical Connection

- HF** DIN43650A 1/2" Conduit (Plug & Receptacle)
- HH** DIN43650A (Plug Only)
- HR** DIN43650A Strain Relief (Plug & Receptacle)
- HP** 9.4mm DIN (Plug Only)
- HM** 9.4mm DIN (Plug & Receptacle)
- MP** Metri-Pack Female 280 Series Sealed (Nason Standard)
- NP** Metri-Pack Male 280 Series Sealed
- CP** Metri-Pack Female 150 Series Sealed
- DP** Metri-Pack Male 150 Series Sealed
- PP** Boot (Military Connector)
- QC** 1/4" Male Spade Quick Connect
- WL** Wire Leads
- WP** Weather Pack (Female)
- TP** Weather Pack (Male)
- EL** 1/2" NPT Male Conduit
- EF** 1/2" NPT Female Conduit
- WD** Deutsch Receptacle (DT04)
- PD** Deutsch Plug (DT06)
- HL** Lighted DIN (Plug & Receptacle)
- ES** M12 - 4PIN
- CL** Sheathed 18 AWG Primaries
- SL** SJO Cable

Additional Options

1. Contacts**

- AT** 10 A @ 125/250 VAC
5 A @ 30 VDC
- AU** Gold Plate/Alloy (for low currents)
- AH** 25 A @ 277 VAC
5 A @ 30 VDC

2. Ground

- GG** Internal Ground

3. Other

- VL** Convolute (for wire leads)

* Variant # identifies this configuration as unique to a specific customer or application.

** Ask about our new environmentally sealed snap-action switch.

Temperature Switches

So we can better meet your application needs, please take a moment to fill out this operation specifications form. Nason will provide a sample to your specifications.

1 Media: _____

2 Set Point: Rising _____ (°F or °C) Falling _____ (°F or °C)

3 Differential: ☐ Yes ☐ No

4 Circuit Form: ☐ SPST-NO ☐ SPST-NC ☐ SPDT

5 Circuit: Electrical ☐ AC _____ V ☐ DC _____ V

 Load (Amps) _____ ☐ Resistive ☐ Inductive Inrush _____

6 Pressure: System (Normal) _____ (Maximum) _____

7 Temperature: System (Normal) _____ (Maximum) _____ (Minimum) _____

 Ambient (Normal) _____ (Maximum) _____ (Minimum) _____

8 Media Connection: _____

9 Electrical Connection: _____

10 Cycles: _____ per hour Other (describe): _____

11 Other Special Requirements (attach separate sheet if necessary): _____

12 System: ☐ New Design ☐ Redesign

13 Application: What will switch control? (Attach circuit diagrams if available) _____

14 Prototype(s) Required by (Date): _____

15 Estimated Annual Usage: _____ Target Net Price: _____

Firm: _____

Address: _____

Project Number or Name: _____

Name & Title: _____ Phone: _____

Email Address: _____

[illegible]

TRANSDUCERS



- New models – NT110, NT41, NES, NESD, NTBT, and NTBT-DL
- Basic to highly customized models
- Hydraulic and pneumatic designs
- Models with accuracy ranges of 1%, .4% and .25%
- Vacuum ranges to 10,000 PSI
- IP69K seal available for the NT25, enabling high-pressure wash down capability
- Compact designs
- Custom outputs and ranges available
- Multiple industry applications



Features

- Totally digital proprietary design
- Innovative redundant sensing elements
- 24V digital output for pressure or temp switch point
- Voltage and current outputs
- Custom pressure ranges and outputs available
- More standard pressure ranges, industry first
- Optional 4x over pressure is available up to 5,000 PSI
- 0.25% accuracy
- ASIC technology, no zero/span potentiometers
- All stainless steel welded housing
- IP-69K rated seal available (high pressure wash down)
- Innovative low current consumption, ideal for custom wireless solutions
- Programmable systems available for OEM/systems integrators for in-house configuring of outputs, ranges and set points to reduce inventory and lead times
- Calibration certificates available (contact customer service)

CE RoHS

Description

The NT25 Series digital/configurable is an industry first. This industrial pressure transducer features stability and accuracy over a wide temperature range. It is lower in cost than competitive units typically not found in older analog designs. It is also plug and play, which is not found in most lower-grade competitive units.

With its proprietary digital/ASIC technology, the NT25 Series features field-proven redundant sensing elements without the need for solder in resistors or trim pots that can drift over time. This provides years of excellent performance and reliability even in the harshest applications. This combined with optional

4x over pressure and the optional integrated temperature or pressure digital switch feature, makes the NT25 Series truly an industry first and second to none.

For extreme applications where power washers are used for wash down, the NT25 Series optional IP69K seal, another industry first, makes it ideal no matter what the environment.

With its flexible, low-power design and lower manufacturing costs, the NT25 Series offers outstanding value and makes it ideal for custom wireless applications.

How to Order (Example: Part Number: **NT25 - 03 - D - 1000 - G - Q00 - 2 - T40**)

| | | | | | | | | | | | | | | |
|------|---|-------------------------|---|---|--|------|---|-----------------------------|---|-----|------------------------------|---|---|--|
| NT25 | - | 03 | - | D | - | 1000 | - | G | - | Q00 | - | 2 | - | T40 |
| | | Media Connection | | | Output | | | Pressure Range (PSI) | | | Electrical Connection | | | Pressure or Temp Set Point (P or T) % of full pressure range (P) or degrees C (T) T40 |
| | | 03 = 1/4" NPT Male | | | B = 4-20mA | | | V000 0300 | | | Q00 = IP69K M12 | | | X = no SP |
| | | 09 = 7/16"-20 | | | C = 0-5 vdc | | | V015 0400 | | | D00 = 4 pin Mini | | | P or T10 = 10% of pressure range or 10°C |
| | | 10 = 9/16-18" UNF Male | | | D = 0-10 vdc | | | V045 0500 | | | ** 9.4 DIN | | | P or T20 = 20% of pressure range or 20°C |
| | | 13 = G1/4" Male | | | H = 1-5 vdc | | | V085 0600 | | | | | | P or T30 = 30% of pressure range or 30°C |
| | | ** | | | J = 1-6 vdc | | | V135 0700 | | | | | | P or T40 = 40% of pressure range or 40°C |
| | | | | | G = 0.5-5.5 vdc | | | V185 0800 | | | | | | P or T50 = 50% of pressure range or 50°C |
| | | | | | K = Ratio metric | | | V285 0900 | | | | | | P or T60 = 60% of pressure range or 60°C |
| | | | | | .5-4.5 vdc | | | 1000 | | | | | | P or T70 = 70% of pressure range or 70°C |
| | | | | | (voltage outputs are 3 wire non-ratiometric) | | | 0015 2000 | | | | | | P or T80 = 80% of pressure range or 80°C |
| | | | | | | | | 0025 3000 | | | | | | P90 = 90% of pressure range |
| | | | | | | | | 0050 4000 | | | | | | (P = % of the full pressure range selected) |
| | | | | | | | | 0100 5000 | | | | | | (full temp range is 10 to 80°C) |
| | | | | | | | | 0150 6000 | | | | | | M = Maintenance mode |
| | | | | | | | | 0200 010K | | | | | | |
| | | | | | | | | 0250 | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |

Specifications

Performance

| | |
|----------------------|--|
| Accuracy | Performance @ 25°C (77°F) |
| Overrange Protection | 0.25% BFSL (includes: non-linearity, hysteresis and non-repeatability) |
| Pressure Range | 2x Rated Pressure or optional 4x and 10x |
| Burst Pressure | see ordering chart - up to 6000 PSI (690 bar) (optional higher ranges available) |
| Pressure Cycles | 5x or 20,000 PSI, whichever is less |
| Update Time | >100 million |
| Digital Output | <=1msec |
| | Optional digital output for pressure or temp switch point |
| | (not available on 4-20mA output units) |

Environmental Data

| | |
|--------------------------|---|
| Temperature | |
| Compensated Temperatures | -40° to 100°C (-40 to 212°F) |
| Operating Temperatures | -40° to 100°C (-40 to 212°F) |
| Storage | -40° to 125°C (-40° to 250°F) |
| Total Error Band (TEB) | 0.9% |
| Stability | 0.25% FS typical (1 year) |
| Shock | 100g, 6 ms, 1/2 sine per EN 60068-2-27, EN 60068-2-29 |
| Vibration | 12g peak, 10 to 2000 Hz per EN60068-2-6, EN60068-2-64 |
| EMI/RFI Protection | Yes |
| Rating | Up to IP-69K available (high pressure wash down) |


Mechanical Configuration

| | |
|-----------------------|--|
| Pressure Connections | See ordering chart |
| Wetted Material | 17-4PH stainless steel (for other materials consult factory) |
| Electrical Connection | 9.4 Din, IP-69K 4 pin M12 Connector |
| Case (housing) | 304 stainless steel |

Electrical Data

| | |
|---|---|
| Excitation | 4.0-28 VDC, Typ (must be at least 0.3V above full output voltage) (7.5 VDC min for 4-20mA) |
| Output | see ordering chart |
| Output Load | 0-800 Ohms @ 10-28 VDC for current output 10K Ohms minimum for voltage outputs |
| Current Consumption | 25mA max (current output), <5mA (voltage output) without digital output, <8mA with digital output |
| Output Noise | <2mV RMS |
| Reverse Polarity Protection | Yes |
| Zero Offset | 1% |
| CE Approval | Yes. Shield must be attached to connector housing (not tested with cable lengths over 30 meters). |
| Set Point for Either Pressure or Temperature | For pressure, this is done by selecting a percentage of your transducer's full range and this will be the set point (40% of a 1000 PSI range will have the set point at 400 PSI) "P40". For temperature, simply select in degrees C where you want the set point to be (selecting 40°C will be represented by "T40" in the part number). |
| Maintenance Mode | The maintenance mode output indicates 1/2 bridge failure. |

Electrical Connections

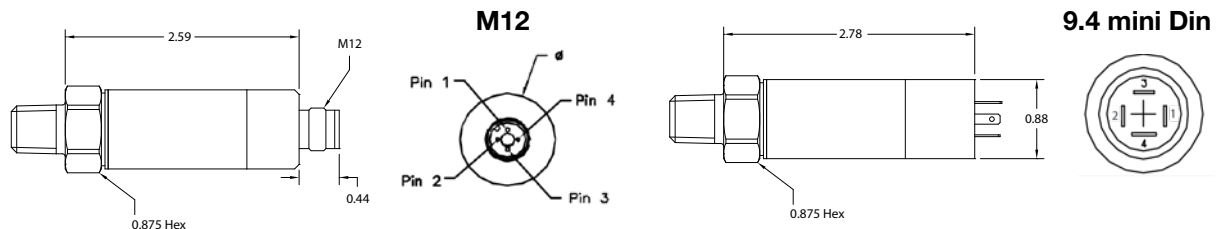

NT25 M12 Pin Assignments

| Voltage Units | Current Units |
|-----------------------------------|------------------------|
| Pin 1 = + Power Supply | Pin 1 = + Power Supply |
| Pin 2 = Output | Pin 2 = N/C |
| Pin 3 = Common | Pin 3 = Output |
| Pin 4 = Digital Output (optional) | Pin 4 = N/C |

NT25 9.4 Pin Assignments

| Voltage Units | Current Units |
|-----------------------------------|------------------------|
| Pin 1 = + Power Supply | Pin 1 = + Power Supply |
| Pin 2 = - Power Supply | Pin 2 = Output |
| Pin 3 = Output | Pin 3 = N/C |
| Pin 4 = Digital Output (optional) | Pin 4 = N/C |



CE RoHS

Features

- Vacuum ranges to 10,000 PSI
- Various outputs
- Compact designs
- 316 stainless steel wetted parts
- Low cost
- Better 0.4% accuracy
- Custom outputs and ranges available
- OEM tested and approved

Application

- Hydraulic/mobile hydraulic
- Pneumatic systems
- Food and beverage Industry
- Refrigeration systems
- Pumps and compressors
- Energy and water management
- Construction and agricultural equipment


Description

The NT40 Series Pressure Transducer utilizes piezoresistance technology in an all stainless steel body. It is compact in size, has long term stability, is easy to install, and is very economical, as well as reliable.

The NT40 sets a new price-performance standard for low cost, high volume commercial and industrial applications.

How to Order (Example: Part Number: **NT40 - 03 - B - 0500 - G - Q00 - 5**)

Model

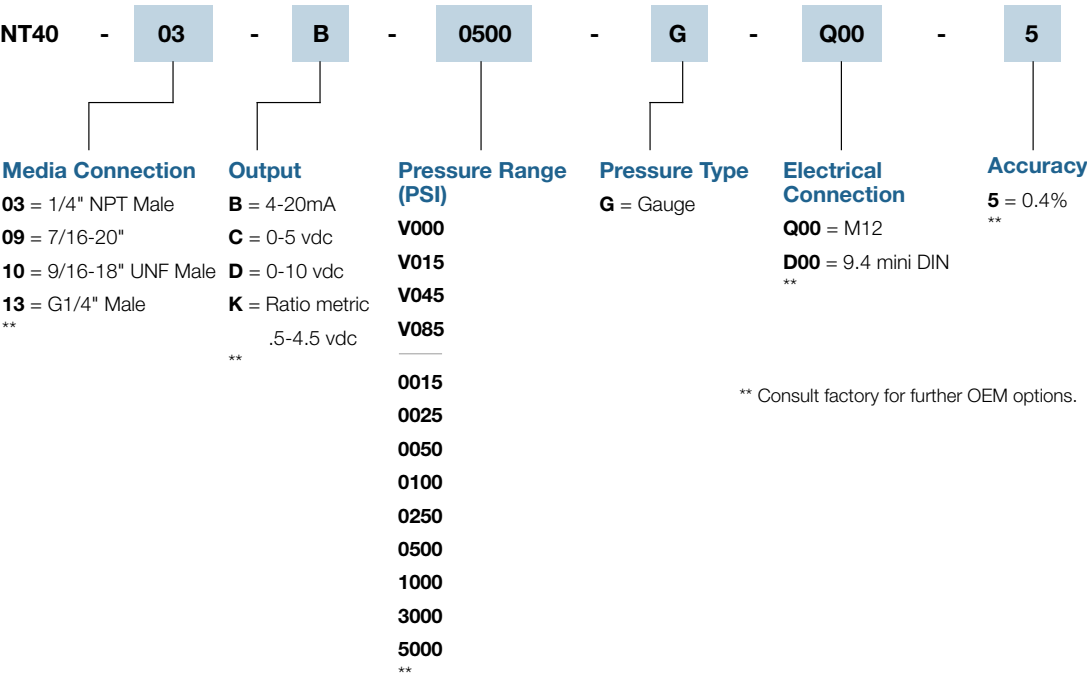

** Consult factory for further OEM options.


Specifications

| | |
|----------------|----------------------------|
| Input | |
| Supply Voltage | 8-28 VDC |
| Pressure Range | VAC to 10,000 PSI |
| Proof Pressure | 1.5 x full scale |
| Burst Pressure | 3 x full scale |
| Fatigue Life | More than 4 million cycles |

| | |
|--------------------------------|---------------------------|
| Performance | |
| Accuracy | 0.4% |
| Stability | 0.2% full scale |
| Compensated Temperatures | -10 to 75°C (14 to 167°F) |
| Operating Temperatures | -20 to 80°C (-4 to 176°F) |
| Zero and Span Offset Tolerance | 1.5% |

| | |
|---------------------------------|---|
| Mechanical Configuration | |
| Pressure Port | 1/4 NPT (standard) * |
| Electrical Connection | M12 * |
| Sealing Rating | IP67 when used with M12 cable assembly |
| Diaphragm Material | 0-75 PSI = 316 SS • 100-1500 PSI = Ceramic • 2,000-10,000 PSI = 17 - 4 SS |

For best performance, use shielded cables. Mating cable assemblies sold separately. * Consult factory for further OEM options.

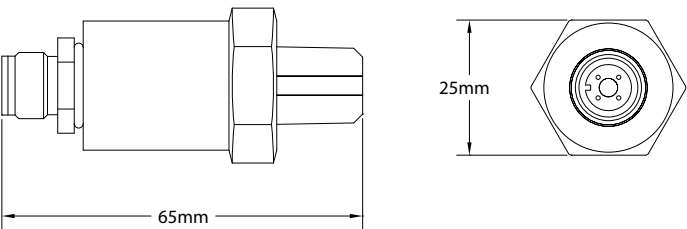

Electrical Connections

| Signal | Function | Color | Pin | Electrical Connector |
|--------|------------|-------|-----|----------------------------|
| 0-5V | Supply V + | Red | 1 | DIN 4 pin (9.4) |
| | Com | Black | 2 | |
| | Output | White | 3 | |
| 4-20mA | Supply V | Red | 1 | |
| | Output | Black | 2 | |
| 0-5V | Supply V + | Black | 1 | M12 |
| | Output + | Red | 2 | |
| | Com | White | 3 | |
| 4-20mA | Supply V + | Brown | 1 | |
| | Output | Blue | 3 | |



CE RoHS

Features

- Vacuum ranges to 285 PSI or 3 to 10,000 PSI
- Various outputs
- Compact designs
- 316 stainless steel housing
- All stainless steel wetted parts
- Low cost
- Better 0.4% accuracy
- Custom outputs and ranges available
- OEM tested and approved
- Low power consumption
- High 125°C (257°F) operating temperature

Application

- Hydraulic/mobile hydraulic
- Pneumatic systems
- Food and beverage Industry
- Refrigeration systems
- Pumps and compressors
- Energy and water management
- Construction and agricultural equipment

Description

The NT41 Series Pressure Transducer utilizes piezoresistance technology in an all stainless steel body. It is compact in size, has long term stability, is easy to install, and is very economical, as well as reliable.

The NT41 sets a new price-performance standard for low cost, high volume commercial and industrial applications.

How to Order (Example: Part Number: NT41 - 03 - B - 0500 - G - Q00 - 5)

Model

| | | | | | | | | | | | | | |
|------|---|---|---|---|--------------------------------|---------------------------------|---|---|----------------------|----------------------------------|---|---|-----------------|
| NT41 | - | 03 | - | B | - | 0500 | - | G | - | Q00 | - | 5 | |
| | | Media Connection (Pressure Port) | | | Output | Pressure Range (PSI) | | | Pressure Type | Electrical Connection | | | Accuracy |
| | | 03 = 1/4" NPT Male | | | B = 4-20mA | V000 | | | G = Gauge | D00 = 9.4 mini DIN | | | 5 = 0.4% ** |
| | | 09 = 7/16-20" | | | C = 0-5 vdc | V015 | | | | B00 = 3 pin Packard | | | |
| | | 10 = 9/16-18" UNF Male | | | D = 0-10 vdc | V045 | | | | W3P = 3 pin Deutsch | | | |
| | | 13 = G1/4" Male | | | K = Ratio metric .5-4.5 vdc | V085 | | | | W4P = 4 pin Deutsch | | | |
| | | ** | | | ** | V135 | | | | Q00 = M12 | | | ** |
| | | | | | | V185 | | | | | | | |
| | | | | | | V285 | | | | | | | |
| | | | | | | 015 | | | | | | | |
| | | | | | | 0025 | | | | | | | |
| | | | | | | 0050 | | | | | | | |
| | | | | | | 0100 | | | | | | | |
| | | | | | | 0250 | | | | | | | |
| | | | | | | 0500 | | | | | | | |
| | | | | | | 1000 | | | | | | | |
| | | | | | | 3000 | | | | | | | |
| | | | | | | 5000 | | | | | | | |
| | | | | | | ** | | | | | | | |

** Consult factory for further OEM options.

** Consult factory for further OEM options.


Specifications

| | |
|----------------|---|
| Input | |
| Supply Voltage | 8-28 VDC |
| Pressure Range | VAC to 10,000 PSI |
| Proof Pressure | 3 — 6,000 PSI = 3x 6,000 — 10k PSI = 2x |
| Burst Pressure | 3 — 6,000 PSI = 4x 6,000 — 10k PSI = 3x |
| Fatigue Life | More than 4 million cycles |

| | |
|--------------------------------|----------------------------|
| Performance | |
| Accuracy | 0.4% |
| Stability | 0.2% full scale |
| Compensated Temperatures | -10 to 100°C (14 to 212°F) |
| Operating Temperatures | -20 to 125°C (-4 to 257°F) |
| Zero and Span Offset Tolerance | 1.5% |

| | |
|---------------------------------|--|
| Mechanical Configuration | |
| Pressure Port | 1/4 NPT (standard) * |
| Electrical Connection | M12*, 3 pin Deutsch, 4 pin Deutsch |
| Sealing Rating | IP67 when used with M12 cable assembly |
| Wetted Parts | 316 stainless steel |


For best performance, use shielded cables. Mating cable assemblies sold separately. * Consult factory for further OEM options.

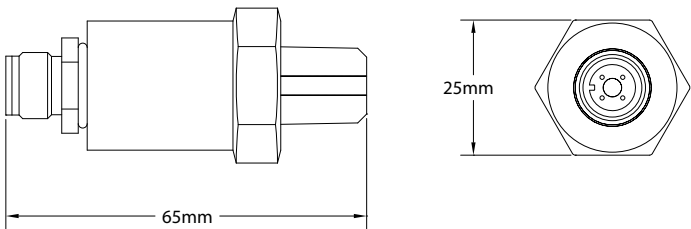

Electrical Connections

| Signal | Function | Color | Pin | Electrical Connector |
|--------|------------|-------|-----|----------------------|
| 0-5V | Supply V + | Brown | 1 | M12 |
| | Output + | White | 2 | |
| | Com | Blue | 3 | |
| 4-20mA | Supply V | Brown | 1 | |
| | Output | Blue | 3 | |

| x4 | Pin1 | Pin2 | Pin3 | Pin4 |
|----|---------|---------|------|---------|
| mA | Output+ | Supply+ | N/C | N/C |
| V | COM | Supply+ | N/C | Output+ |





CE RoHS

Features

- Vacuum ranges to 10,000 PSI
- Various outputs
- Compact designs
- 316 stainless steel wetted parts
- Low cost
- Industrial 1% accuracy
- Custom outputs and ranges available
- OEM tested and approved

Application

- Hydraulic/mobile hydraulic
- Pneumatic systems
- Food and beverage industry
- Refrigeration systems
- Pumps and compressors
- Energy and water management
- Construction and agricultural equipment

Description

The NT100 Series Pressure Transducer utilizes piezoresistance technology in an all stainless steel body. It is compact in size, has long term stability, is easy to install, and is very economical, as well as reliable.

The NT100 sets a new price-performance standard for low cost, high volume commercial and industrial applications.

How to Order (Example: Part Number: **NT100 - 03 - B - 0500 - G - D00 - 4**)

Model

| Media Connection | Output | Pressure Range (PSI) | Pressure Type | Electrical Connection | Accuracy |
|--|--|----------------------|------------------|----------------------------|---------------------|
| NT100 - 03 - B - 0500 - G - D00 - 4 | | | | | |
| 03 = 1/4" NPT Male | B = 4-20mA | 0500 | G = Gauge | D00 = 9.4 mini DIN | 4 = 1% ** |
| 09 = 7/16-20" | C = 0-5 vdc | V000 | | B00 = 3 pin Packard | |
| 10 = 9/16-18" UNF Male | D = 0-10 vdc | V015 | | Q00 = M12 | |
| 13 = G1/4" Male | K = Ratio metric ** .5-4.5 vdc | V045 | | | |
| | | V085 | | | |
| | | 0015 | | | |
| | | 0025 | | | |
| | | 0050 | | | |
| | | 0100 | | | |
| | | 0250 | | | |
| | | 0500 | | | |
| | | 1000 | | | |
| | | 3000 | | | |
| | | 5000 | | | |
| | | ** | | | |

** Consult factory for further OEM options.


Specifications

| | |
|----------------|----------------------------|
| Input | |
| Supply Voltage | 8-28 VDC |
| Pressure Range | VAC to 10,000 PSI |
| Proof Pressure | 1.5 x full scale |
| Burst Pressure | 3 x full scale |
| Fatigue Life | More than 4 million cycles |

| | |
|--------------------------------|---------------------------|
| Performance | |
| Accuracy | 1% |
| Stability | 0.2% full scale |
| Compensated Temperatures | -10 to 75°C (14 to 167°F) |
| Operating Temperatures | -20 to 80°C (-4 to 176°F) |
| Zero and Span Offset Tolerance | 1.5% |

| | |
|---------------------------------|----------------------------------|
| Mechanical Configuration | |
| Pressure Port | 1/4 NPT (standard) * |
| Electrical Connection | 9.4 mini DIN, 3 pin Packard * |
| Sealing Rating | IP65 with standard 9.4 DIN cable |
| Wetted Parts | 316 stainless steel |

For best performance, use shielded cables. Mating cable assemblies sold separately. * Consult factory for further OEM options.

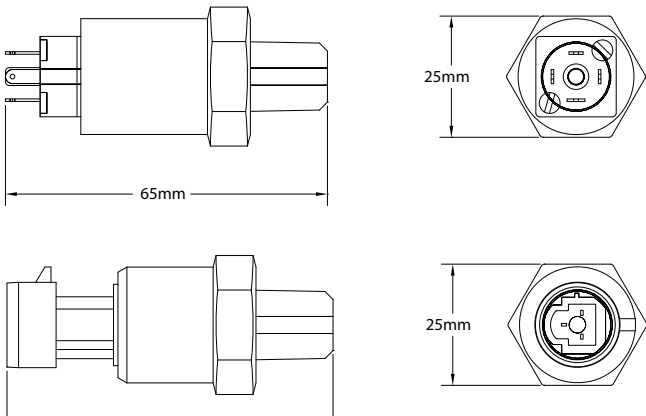

Electrical Connections

| Signal | Function | Color | Pin | Electrical Connector |
|--------|------------|-------|-----|----------------------------|
| 0-5V | Supply V + | Red | 1 | DIN 4 pin (9.4) |
| | Com | Black | 2 | |
| | Output | White | 3 | |
| | N/A | N/A | 4 | |
| 4-20mA | Supply V | Red | 1 | 3 pin Packard |
| | Output | Black | 2 | |
| 0-5V | Com | - | A | |
| | Supply + | - | B | |
| | Output + | - | C | |
| 4-20mA | Output | - | A | |
| | Supply + | - | B | |



Features

- Vacuum ranges to 285 PSI or 3 to 10,000 PSI
- Various outputs
- Compact designs
- 316 stainless steel housing
- All stainless steel wetted parts
- Low cost
- Industrial 1% accuracy
- Custom outputs and ranges available
- OEM tested and approved
- Low power consumption
- High 125°C (257°F) operating temperature

Application

- Hydraulic/mobile hydraulic
- Pneumatic systems
- Food and beverage industry
- Refrigeration systems
- Pumps and compressors
- Energy and water management
- Construction and agricultural equipment

CE RoHS

Description

The NT110 Series Pressure Transducer utilizes piezoresistance technology in an all stainless steel body. It is compact in size, has long term stability, is easy to install, and is very economical, as well as reliable.

The NT110 sets a new price-performance standard for low cost, high volume commercial and industrial applications.

How to Order (Example: Part Number: **NT110 - 03 - B - 0500 - G - D00 - 4**)

Model

| Media Connection (Pressure Port) | Output | Pressure Range (PSI) | Pressure Type | Electrical Connection | Accuracy |
|--|---------------------------------------|-------------------------|------------------|----------------------------|---------------------|
| NT110 - 03 - B - 0500 - G - D00 - 4 | | | | | |
| 03 = 1/4" NPT Male | B = 4-20mA | | G = Gauge | D00 = 9.4 mini DIN | 4 = 1% ** |
| 09 = 7/16-20" | C = 0-5 vdc | V000 | | B00 = 3 pin Packard | |
| 10 = 9/16-18" UNF Male | D = 0-10 vdc | V015 | | W3P = 3 pin Deutsch | |
| 13 = G1/4" Male | K = Ratio metric .5-4.5 vdc | V045 | | W4P = 4 pin Deutsch | |
| ** | ** | V085 | | Q00 = M12 | ** |
| | | V135 | | | |
| | | V185 | | | |
| | | V285 | | | |
| | | 0015 | | | |
| | | 0025 | | | |
| | | 0050 | | | |
| | | 0100 | | | |
| | | 0250 | | | |
| | | 0500 | | | |
| | | 1000 | | | |
| | | 3000 | | | |
| | | 5000 | | | |
| | | ** | | | |

** Consult factory for further OEM options.

Specifications

Input

| | |
|----------------|---|
| Supply Voltage | 8-28 VDC |
| Pressure Range | VAC to 285 PSI or 3 to 10,000 PSI |
| Proof Pressure | 3 — 6,000 PSI = 3x 6,000 — 10k PSI = 2x |
| Burst Pressure | 3 — 6,000 PSI = 4x 6,000 — 10k PSI = 3x |
| Fatigue Life | More than 4 million cycles |


Performance

| | |
|--------------------------------|---|
| Accuracy | 1% FS, BFSL |
| Stability | 0.2% full scale |
| Compensated Temperatures | -10 to 100°C (14 to 212°F) |
| Operating Temperatures | -20 to 125°C (-4 to 257°F) |
| Zero and Span Offset Tolerance | 1.5% |
| Current Consumption | Approx 3mA for voltage output, 22mA for current output (4-20mA) |
| Shock | 50g, 11ms, 1/2 sign |
| Vibration | 11g peak from 10 to 400 Hz |



Mechanical Configuration



| | |
|-----------------------|---|
| Pressure Port | 1/4 NPT (standard) * |
| Electrical Connection | 9.4 mini DIN, 3 pin Packard * |
| Ingress Rating | IP65 with standard 9.4 DIN cable |
| Housing | 316 stainless steel |
| Diaphragm Material | 316 SS <1500 psi, 17-4 SS >1500 PSI, wetted parts are SS, no internal O-Rings |
| Approvals | CE |

For best performance, use shielded cables. Mating cable assemblies sold separately. * Consult factory for further OEM options.

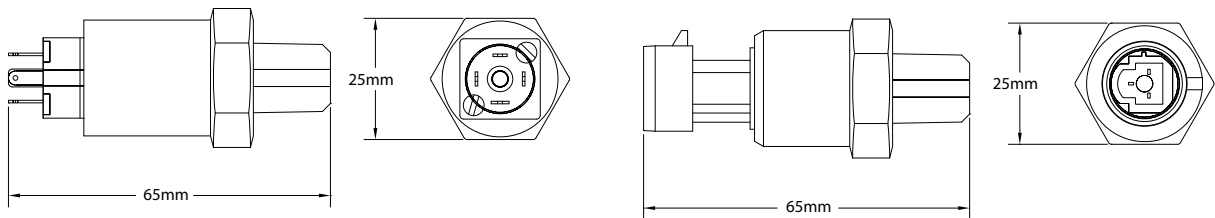

Electrical Connections

| Signal | Function | Color | Pin | Electrical Connector |
|--------|------------|-------|-----|--|
| 0-5V | Supply V + | Red | 1 | DIN 4 pin (9.4)  |
| | Com | Black | 2 | |
| | Output | White | 3 | |
| | N/A | N/A | 4 | |
| 4-20mA | Supply V | Red | 1 | Black |
| | Output | Black | 2 | |
| 0-5V | Com | Black | A | 3 pin Packard  |
| | Supply + | Red | B | |
| | Output + | White | C | |
| 4-20mA | Output | Black | A | |
| | Supply + | Red | B | |





Features


- **Operating temperature:** -40° C to 90° C
- **Power supply:** 9 VDC to 28 VDC
- **Power supply current:** 35mA maximum
- **Relay output:** 250 VAC/220 VDC, 10A maximum
- **Relay type:** normally open or normally closed
- **Media connection:** 1/4" NPT standard
(consult factory for other options)
- **Pressure ranges:** up to 10,000 PSI
- **Set point and hysteresis:** factory programmable
- **UL recognized component**

Description

The NES Electronic Pressure Switch Digital Technology brings a new level of performance to the pressure switch world. The NES features a solid stainless steel long life header/diaphragm for demanding applications where o-rings and creeper compatibility are a thing of the past. The NES houses the proprietary redundant

bridge circuit for high-shock and high-vibration environments making it ideal for off road/mobile hydraulic applications where downtime is not an option. These industry firsts combined with the factory programmable set-point and hysteresis allows for low-cost custom solutions with next day shipments.

How to Order (Example: Part Number: **NES - 3A3 - 50R / 015 HR AT**)

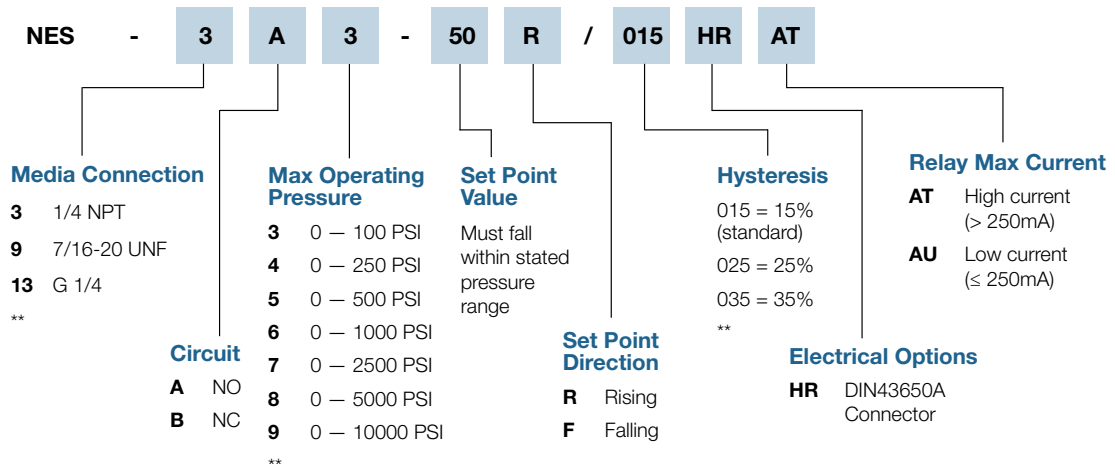

Pressure ranges and outputs listed above are quick ship versions.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use. While we provide application assistance personally, through our literature and the Nason website, it is up to the customer to determine the suitability of the product in the application.

Specifications

Performance

| | |
|-----------------------|--|
| Accuracy: | Performance @ 25° C (77° F) 0.5% of max operating pressure (see ordering code) |
| Overrange Protection: | 2x Rated Pressure and optional 4x see ordering chart |
| Pressure Range: | - up to 10,000 PSI (689 bar) |
| Burst Pressure: | 5x or 20,000 PSI, whichever is less |
| Relay Life: | >2 million @ 100mA at 240 VAC, Typ* |
| Update Time: | ≤1msec |
| Relay Output: | 250 VAC/220 VDC, up to 5A standard 10A Max |
| Relay Max Current: | Low Current ≤ 250mA, High Current > 250mA, 10A Max (increased current results in reduced lifecycle*) |

Environmental Data

| | |
|---------------------------|--|
| Compensated Temperatures: | -40° to 90° C (-40° to 194° F) |
| Operating Temperatures: | -40° to 90° C (-40° to 194° F) |
| Storage: | -40° to 125° C (-40° to 250° F) |
| TEB: | 1% of max operating pressure (see ordering code) |
| Long Term Drift: | 0.2% FS/year (non-cumulative) |
| Shock: | 2g, 11 ms, 1/2 sine |
| Vibration: | 4g, peak, 30 to 400 Hz |
| EMI/FRI Protection: | Yes |
| Rating: | IP65 |
| Approvals: | UL (approved connector, max ambient temperature at 55° C for L relay version; max ambient temperature at 20° C for H relay version) |

Mechanical Configuration

| | |
|------------------------|---|
| Media Connection: | 1/4" NPT Male (standard) |
| Wetted Material: | 17-4PH stainless steel |
| Electrical Connection: | Large DIN |
| Case: | (housing) 304 stainless steel/polycarbonate plastic |

Electrical Data


| | |
|------------------------------|--|
| Excitation: | 9-28 VDC, Typ |
| Output: | Relay output |
| Current Consumption: | 35mA max |
| Reverse Polarity Protection: | Yes |
| Set Points: | No set points in vacuum range, 5 PSI Min set point with <100 PSI, 10% of configured pressure min set point >100 PSI range |

Mating connectors and cable assemblies sold separately.

*Refer to relay datasheet for lifecycle information: TE connectivity, high current relay, product code PB114024, part number 9-1415029-1.

Electrical Connections

Large DIN per DIN-43650

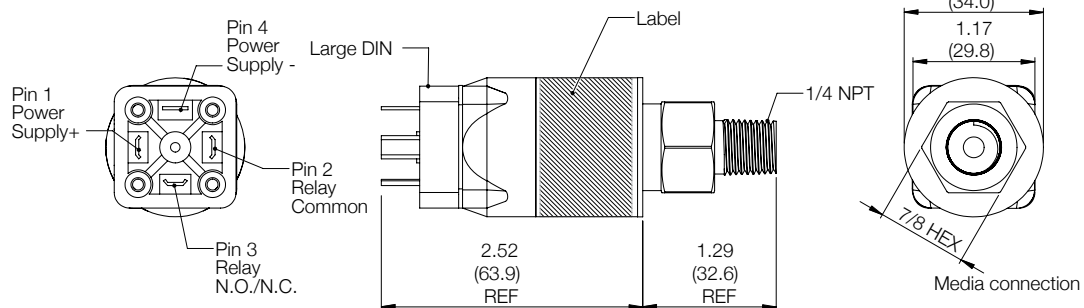

Large DIN per DIN-43650

| | |
|--------|---------------------------------|
| Pin 1: | Power supply +: 9 VDC to 28 VDC |
| Pin 2: | Relay common |
| Pin 3: | Relay N.O./N.C. |
| Pin 4: | Power supply - |

Dimensions are in inches (mm) and for reference only.



Features

- **Compensated temperature:** -40° C to 85° C
- **Operating temperature:** -40° C to 100° C
- **Power supply:** 10.5 VDC to 28 VDC
- **Display:** 4-digit, bi-color display (red or green)
- **Outputs:** Digital : 250 mA max (PNP) or 200 mA max (NPN), or optional analog output: up to 10.5 VDC or up to 28 VDC (field selectable)
- **Media connection:** 1/4" NPT, 7/16-20 UNF, G 1/4
- **Pressure ranges:** Wide variety up to 10K psig

Description

What makes the NESD model stand apart is the unique LED display - which allows for 360° scrolling, or you can lock the display in one location. It also features field-programmable set points and hysteresis.

The NESD model incorporates redundant sensing technology, allowing for notification that

the sensor needs to be replaced before it might fail (maintenance mode), eliminating operational downtime.

The NESD model pressure switch/transducer comes standard with one digital output (NPN or PNP), optional analog output, operates from 10.5 to 28 VDC, and is IP67 certified.

How to Order (Example: Part Number: **NESD - 3D1 - 0050 / ES**)

| Media Connection | | Version | | Pressure Range | | Electrical Options |
|------------------|---------------|-----------|---|----------------|-------------|-----------------------|
| 3 | 1/4" NPT Male | D1 | 1 switch output with display | 0015 | 1000 | ES M12 (5-pin) |
| 9 | 7/16-20 UNF | D2 | 2 switch outputs with display | 0025 | 2000 | |
| 13 | G 1/4 | D3 | 1 analog output, 1 switch output with display | 0050 | 3000 | |
| ** | | | | 0100 | 4000 | |
| | | | | 0250 | 5000 | |
| | | | | 0500 | 6000 | |
| | | | | 0750 | 010K | |
| | | | | ** | | |

** Consult factory for further OEM options. Pressure ranges and outputs listed above are quick ship versions.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use. While we provide application assistance personally, through our literature and the Nason website, it is up to the customer to determine the suitability of the product in the application.

Specifications

Performance

| | |
|-----------------------|---|
| Accuracy: | Performance @ 25° C (77° F) 0.5% of max operating pressure |
| Overrange Protection: | 2x Rated Pressure or optional 4x and 10x |
| Pressure Range: | see ordering chart - up to 10,000 PSI (689 bar) |
| Burst Pressure: | 5x or 20,000 PSI, whichever is less |
| Pressure Cycles: | >100 million |
| Update Time: | ≤1msec |

Environmental Data

| | |
|---------------------------|---|
| Compensated Temperatures: | -40° to 85° C (-40° to 185° F) |
| Operating Temperatures: | -40° to 100° C (-40° to 212° F) |
| Storage: | -40° to 125° C (-40° to 257° F) |
| TEB: | 1% BFSL (includes: Non-linearity, Hysteresis and Non-repeatability) |
| Long Term Drift: | 0.2% FS/year (non-cumulative) |
| Shock: | 50g, 11 ms, 1/2 sine |
| Vibration: | 10g, peak, 20 to 2400 Hz |
| EMI/FRI Protection: | Yes |
| Rating: | Up to IP67 |

Mechanical Configuration

| | |
|------------------------|---|
| Pressure Connections: | 1/4" NPT Male, 7/16-20 UNF, G1/4 Male |
| Wetted Material: | 17-4PH stainless steel (for other materials consult factory) |
| Electrical Connection: | M12 (5-pin) |
| Case: | (housing) 304 stainless steel and high-impact polycarbonate (display) |

Electrical Data



| | |
|------------------------------|--|
| Power Supply: | 10.5-28VDC |
| Output: | 10.5 VDC to 28 VDC at 250 mA max (PNP) or 200 mA max (NPN) (digital) up to 10 VDC or up to 20 mA (analog) |
| Field Programmable: | up to 10 VDC or up to 20 mA (analog) |
| Output Impedance: | <100 Ohms, Nominal |
| Current Consumption: | 30 mA at 24V/voltage output 40 mA at 12V/voltage output 50 mA at 24V/voltage output 60 mA at 12V/voltage output |
| Output Noise: | <2mV RMS |
| Reverse Polarity Protection: | Yes |

For best performance use shielded cables.

Mating connectors and cable assemblies sold separately.

Electrical Connections

5-Pin M12

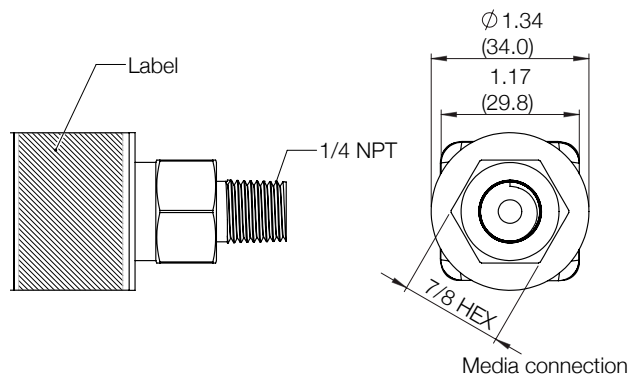

5-Pin M12

| | |
|--------|--|
| Pin 1: | Power supply: 10.5 VDC to 28 VDC |
| Pin 2: | Digital output #2 (optional) or analog output (optional) |
| Pin 3: | Power supply common |
| Pin 4: | Digital output #1 |
| Pin 5: | Maintenance mode output |

Dimensions are in inches (mm) and for reference only.



Features

- Connects to smartphones and tablets with BLE (Bluetooth® Low Energy)
- Certified Bluetooth® wireless technology
- Pressure ranges from vacuum to 10,000 psi
- Long battery life (proprietary technology)
- 1% standard accuracy with optional 0.25% ultra high accuracy
- Stainless steel and high-impact polycarbonate construction
- Alarm set points
- Secure field programmable naming
- Patent-pending design
- Schrader, NPT, SAE and G ¼ pressure connection

Description

Another industry first! The first Bluetooth®-certified wireless pressure transducer with long battery life and patent-pending design makes the NTBT a perfect fit for many applications for Industrial and Home Automation. Download the free app, install the transducer and wirelessly connect — no confusing wiring to figure out.

Choose the NTBT for virtually anywhere you’d like to monitor pressure without the use of wires — from pneumatic systems, mobile hydraulics, residential and commercial applications to water, hydraulic, irrigation, pools, medical and sprinkler systems. Because it is built on Nason proprietary technology, the NTBT ensures high quality and high accuracy with Nason’s quick deliveries and low costs.

How to Order (Example: Part Number: **NTBT - 03 - 0015 - 2**)

| | | | | | | |
|-------------|---|---------------------------|---|-----------------------|---|------------------|
| NTBT | - | 03 | - | 0015 | - | 2 |
| | | | | | | |
| | | Media Connection | | Pressure Range | | Accuracy |
| | | 3 1/4 NPT Male | | 0050 | | 2 = 0.25% |
| | | 9 7/16-20 UNF Male | | 0100 | | 4 = 1.00% |
| | | 13 G 1/4 Male | | 0250 | | |
| | | | | 0500 | | |
| | | | | 0650 | | |
| | | | | 1000 | | |
| | | | | 3000 | | |
| | | | | 5000 | | |
| | | | | 010K | | |

Specifications

Performance

| | |
|-----------------------|---|
| Pressure Accuracy: | Performance @ 25° C (77° F) 0.25% or 0.2 psi, whichever is greater, 1% BFSL (includes non-linearity, hysteresis, non-repeatability) |
| Overrange Protection: | 2x Rated Pressure |
| Pressure Range: | see ordering chart - up to 10,000 psi (690 bar) |
| Burst Pressure: | 5x or 20,000 psi, whichever is less |
| Pressure Cycles: | >100 million |
| Update Time: | Bluetooth® wireless technology (1sec) |

Environmental Data

| | |
|---------------------------|---|
| Compensated Temperatures: | -10° to 85° C (14 to 185° F) |
| Operating Temperatures: | -40° to 85° C (-40° to 185° F) |
| Storage: | -40° to 125° C (-40° to 257° F) without battery |
| TEB: | 3% BFSL (includes: Non-linearity, Hysteresis and Non-repeatability) |
| Long Term Drift: | 0.2% FS/year (non-cumulative) |
| Shock: | 50g, 11 ms, 1/2 sine |
| Vibration: | 10g, peak, 20 to 2400 Hz |
| EMI/FRI Protection: | Yes |
| Ingress Rating: | IP-67 |

Mechanical Configuration

| | |
|----------------------|---|
| Pressure Connection: | 1/4 NPT Male, 7/16-20 UNF Male, G1/4 Male |
| Wetted Material: | 17-4PH stainless steel (for other materials consult factory) |
| Case: | (housing) 304 stainless steel and high-impact polycarbonate I |

Electrical Data

| | |
|----------------------|--|
| Power Supply: | 3.6V Proprietary replacement battery. Battery life: 24 months, typical. Battery life is affected by high and low temperatures. |
| Battery Removal: | If the battery pack is removed, you must wait 90 seconds to reinstall or unit may lock up. |
| Connection Distance: | 250 feet (line of sight) |
| Compatible Devices: | Software: Android - (Version 4.3 or later) iOS - (Current version and previous one) Hardware: Android - Device supports Bluetooth Smart (Version 4.0 and later) iPad Gen 3 - (released March 16, 2012) iPad Gen 4 - (released November 2, 2012) iPad Mini Gen 1 - (released November 2, 2012) iPad Mini Gen 2 - (released November 12, 2013) iPad Air - (released November 1, 2013) iPhone 5 - (released September 21, 2012) iPhone 5C, 5S - (released September 20, 2013) iPhone 6, 6 Plus - (released September 19, 2014) iPhone 6S, 6S plus - (released Sept 25 2015) iPhone 7, 7 plus - (released Sept 16, 2016) iPhone 8, 8 plus iPhone X, Xs, Xs Max |

Features

- Connects to smartphones and tablets with BLE (Bluetooth® Low Energy)
- Certified Bluetooth® wireless technology
- Pressure ranges from vacuum to 10,000 psi
- Long battery life (proprietary technology)
- 1% standard accuracy with optional 0.25% ultra high accuracy
- Stainless steel and high-impact polycarbonate construction
- Alarm set points
- Secure field programmable naming
- Patent-pending design
- Number of individual logs: from 15,872 to 32,768
- Email logged files from the **FREE** app



Description

Another Industry First! The first Bluetooth® certified wireless pressure transducer with long battery life and patent- pending design makes the NTBT-DL a perfect fit for many applications for Industrial and Home Automation. The NTBT-DL includes data logging capability to save pressure and temperature data that can be emailed and opened in an excel spread sheet. Download the free app, install the transducer and wirelessly connect - no confusing wiring to figure out.

From HVAC in marine, campers, motorhomes, residential and commercial applications to water, hydraulic, irrigation, pools, medical and sprinkler systems or anywhere you need to monitor pressure without the need of wires.

Because it is built on Nason proprietary technology, the NTBT-DL ensures high quality and high accuracy with quick deliveries, and low costs.

How to Order (Example: Part Number: **NTBT-DL - 03 - 0500 - 2 - T24**)

| NTBT-DL | - | 03 | - | 0500 (psi) | - | 2 | - | T24 |
|---------|---|----------------------------|---|-----------------------|---|-----------------|---|-------------------------------|
| | | Pressure Connection | | Pressure Range | | Accuracy | | M5 / Temperature Probe |
| | | 03 = 1/4" NPT Male | | 0050 | | 2 = 0.25% | | (BLANK) = No M5 connector |
| | | 09 = 7/16- 20 UNF Male | | 0100 | | 4 = 1.00% | | (not temp probe capable) |
| | | 13 = G1/4 Male | | 0250 | | | | T24 = 24" cable with M5 |
| | | 42 = 7/16-20 UNF | | 0500 | | | | mating connector and external |
| | | Female | | 0650 | | | | temperature probe |
| | | w/ 45° flare & valve | | 1000 | | | | M5 = M5 connector alone |
| | | depressor (Schrader) | | 3000 | | | | (temp probe capable) |
| | | ** | | 5000 | | | | ** |
| | | | | 010K | | | | |
| | | | | ** | | | | |

** - Consult factory for further OEM options.
 Pressure ranges listed above are quick ship versions.
 All straight-thread o-rings are Viton. It is customer's responsibility to determine compatibility.

Specifications

Performance

| | |
|-----------------------|---|
| Pressure Accuracy: | Performance @ 25° C (77° F) 0.25% or 0.2 psi, whichever is greater, 1% BFSL (includes non-linearity, hysteresis, non-repeatability) |
| Temperature Accuracy: | ±1° C |
| Overrange Protection: | 2x Rated Pressure |
| Pressure Range: | see ordering chart - up to 10,000 psi (690 bar) |
| Burst Pressure: | 5x or 20,000 psi, whichever is less |
| Pressure Cycles: | >100 million |
| Update Time: | Bluetooth® wireless technology (1sec) |

Environmental Data

| | |
|---------------------------|---|
| Compensated Temperatures: | -10° to 85° C (14 to 185° F) |
| Operating Temperatures: | -40° to 85° C (-40° to 185° F) |
| Storage: | -40° to 125° C (-40° to 257° F) without battery |
| TEB: | 3% BFSL (includes: Non-linearity, Hysteresis and Non-repeatability) |
| Long Term Drift: | 0.2% FS/year (non-cumulative) |
| Shock: | 50g, 11 ms, 1/2 sine |
| Vibration: | 10g, peak, 20 to 2400 Hz |
| EMI/FRI Protection: | Yes |
| Ingress Rating: | IP-67 |
| Approvals: | CE |

Mechanical Configuration

| | |
|----------------------|--|
| Pressure Connection: | 1/4 NPT Male, 7/16-20 UNF Male, G1/4 Male, 7/16-20 UNF Female w/45° flare & valve depressor |
| Wetted Material: | 17-4PH stainless steel (for other materials consult factory) |
| Case: | (housing) 304 stainless steel and high-impact polycarbonate I |


Electrical Data

| | |
|----------------------|--|
| Power Supply: | 3.6V Proprietary replacement battery. Battery life: 24 months, typical. Battery life is affected by high and low temperatures. |
| Battery Removal: | If the battery pack is removed, you must wait 90 seconds to reinstall or unit may lock up. |
| Connection Distance: | 250 feet (line of sight) |
| Compatible Devices: | Software: Android - (Version 4.3 or later) iOS - (Current version and previous one) Hardware: Android - Device supports Bluetooth Smart (Version 4.0 and later) iPad Gen 3 - (released March 16, 2012) iPad Gen 4 - (released November 2, 2012) iPad Mini Gen 1 - (released November 2, 2012) iPad Mini Gen 2 - (released November 12, 2013) iPad Air - (released November 1, 2013) iPhone 5 - (released September 21, 2012) iPhone 5C, 5S - (released September 20, 2013) iPhone 6, 6 Plus - (released September 19, 2014) iPhone 6S, 6S plus - (released Sept 25 2015) iPhone 7, 7 plus - (released Sept 16, 2016) iPhone 8, 8 plus iPhone X, Xs, Xs Max |

Data Logging


| | |
|------------------------|---|
| Measurement Intervals: | From 50ms up to 1hr Fill Until Full: 50ms, 500ms, 1 sec, 5 sec, 10 sec, 30 sec, 1 min, 5 min, 10 min, 20 min, 30 min, 1 hr, 1 day FIFO: 500ms, 1 sec, 5 sec, 10 sec, 30 sec, 1 min, 5 min, 10 min, 20 min, 30 min, 1 hr, 1 day |
| Recording Temperature: | External temperature probe required to record temperature data |
| Storage Modes: | Fill Until Full: When memory is full, recording will stop FIFO (First in/First out): When memory is full, recording will start over from the beginning replacing the first recordings with the latest moving forward |

W3P Connector




| ELECTRICAL CONNECTIONS | | |
|------------------------|----------|-----|
| SIGNAL | FUNCTION | PIN |
| 0-5V | SUPPLY V | A |
| | OUTPUT + | B |
| | COM | C |
| | SUPPLY V | A |
| 4-20mA | N/C | B |
| | OUTPUT + | C |

W4P Connector




| ELECTRICAL CONNECTIONS | | |
|------------------------|-----------|-----|
| SIGNAL | FUNCTION | PIN |
| 0-5V | COM | 1 |
| | SUPPLY V+ | 2 |
| | N/C | 3 |
| | OUTPUT + | 4 |
| 4-20mA | OUTPUT + | 1 |
| | SUPPLY + | 2 |
| | N/C | 3 |
| | N/C | 4 |

3 PIN Packard Connector for B00 Option




| ELECTRICAL CONNECTIONS | | |
|------------------------|----------|-----|
| SIGNAL | FUNCTION | PIN |
| 0-5V | COM | A |
| | SUPPLY + | B |
| | OUTPUT + | C |
| | OUTPUT | A |
| 4-20mA | SUPPLY + | B |

M12 4 PIN Connector for Q00 Option




| ELECTRICAL CONNECTIONS | | |
|------------------------|-----------|-----|
| SIGNAL | FUNCTION | PIN |
| 0-5V | SUPPLY V+ | 1 |
| | OUTPUT | 2 |
| | COM | 3 |
| | N/C | 4 |
| 4-20mA | SUPPLY V+ | 1 |
| | N/C | 2 |
| | OUTPUT | 3 |
| | N/C | 4 |


0-5VDC OUTPUT



4-20mA OUTPUT




9.4 DIN Connector for D00 Option




| ELECTRICAL CONNECTIONS | | | |
|------------------------|-----------------|-------|-----|
| SIGNAL | FUNCTION | COLOR | PIN |
| 0-5V | +POWER SUPPLY | RED | 1 |
| | -COMMON | BLACK | 2 |
| | OUTPUT | WHITE | 3 |
| | *DIGITAL OUTPUT | GREEN | 4 |
| 4-20mA | +POWER SUPPLY | RED | 1 |
| | OUTPUT | BLACK | 2 |
| | N/C | N/C | 3 |
| | N/C | N/C | 4 |

*(OPTIONAL)


0-5VDC OUTPUT



4-20mA OUTPUT

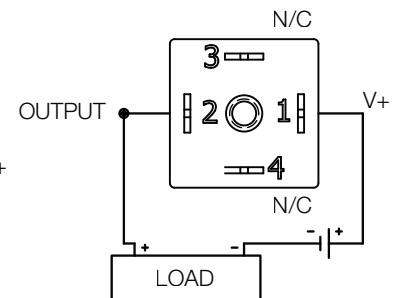


9.4mm DIN Cable Assembly

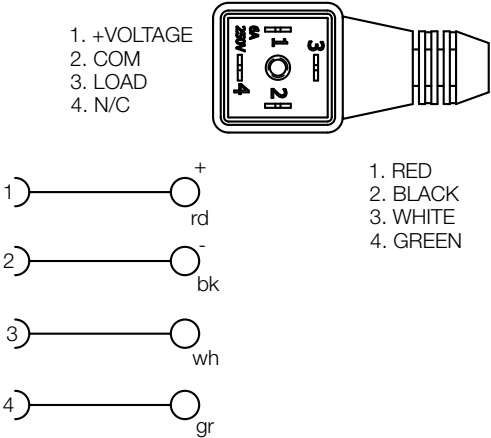

| PART # | * = LENGTH |
|--------|------------|
| NTC91 | 1 METER |
| NTC93 | 3 METERS |

CABLE: PUR - 4 X 22AWG SHIELDED


M12, 5 PIN IP67K Cable Assembly

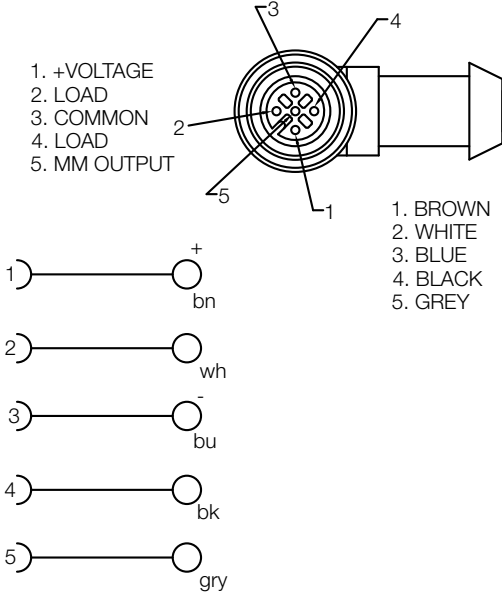

| PART # | * = LENGTH |
|----------|------------|
| NTCM1251 | 1 METER |
| NTCM1253 | 3 METERS |

CABLE: PVC - 5 X 22AWG SHIELDED


3 PIN Packard Cable Assembly

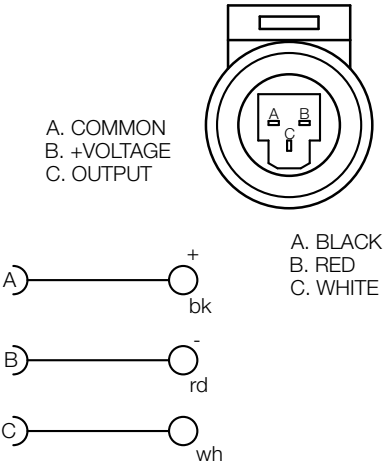

| PART # | * = LENGTH |
|---------|------------|
| NTCPAC1 | 1 METER |
| NTCPAC3 | 3 METERS |

CABLE: PVC - 4 X 22AWG

M12, 4 PIN IP69K Cable Assembly

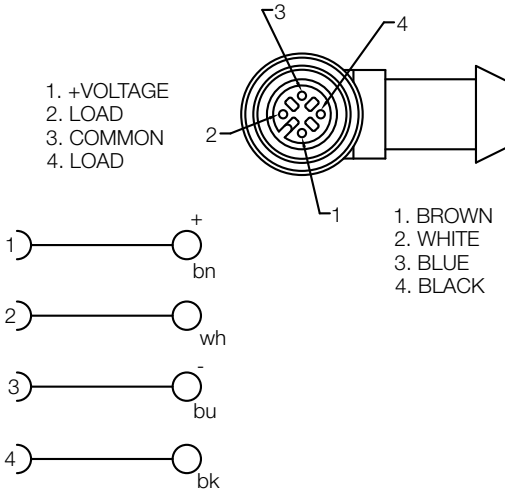

| PART # | * = LENGTH |
|---------|------------|
| NTCM121 | 1 METER |
| NTCM123 | 3 METER |

CABLE: PUR - 4 X 22AWG SHIELDED

Diaphragm Compatibility

| Media | Buna | EP | Viton |
|----------------------------|------|----|-------|
| Acetic Acid | | • | |
| Acetone | | • | |
| Acetylene | • | | |
| Air | • | | |
| Alcohols | • | | |
| Alkalies (Weak) | • | | |
| Alkalies (Strong) | | • | |
| Ammonia (Anhydrous) | • | | |
| Ammonia (Hydroxide) | | • | |
| Asphalt | | | • |
| Automotive Oils | • | | |
| Beer | • | | |
| Benzene | | | • |
| Boric Acid | • | | |
| Brake Fluid | | • | |
| Bunker Oil | • | | |
| Butane | • | | |
| Butyl Cellosolve | | • | |
| Carbon Dioxide | • | | |
| Carbon Monoxide | • | | |
| Cellulose | | • | |
| Chlorobenzene | | | • |
| Citric Acid | • | | |
| Coke Oven Gas | | | • |
| Coolanol | • | | |
| Diesel Fuels | • | | |
| Di-Ester Lube (MIL-L-7808) | | | • |
| Dowtherm A&E | | • | |
| Ethanol | • | | |
| Ether | | • | |
| Ethylene | • | | |
| Ethylene Glycol | • | | |
| Freon 11, 12, 112, 114 | • | | |
| Freon 22 | | • | |
| Fyrquel | | • | |
| Fuel Oil | • | | |
| Gasoline | • | | |
| Glycerin | • | | |
| Helium | • | | |
| Hexane | • | | |

| Media | Buna | EP | Viton |
|--------------------------|------|----|-------|
| Hydraulic Oil (PET Base) | • | | |
| Hydrocarbons | • | | |
| Hydrogen | • | | |
| Hydrogen Sulphide | | • | |
| Isopropanol | | • | |
| JP-3-6 | • | | |
| Kerosene | • | | |
| LPG | • | | |
| Lube Oil (PET base) | • | | |
| Methanol | • | | |
| MEK | | • | |
| Mineral Oil | • | | |
| Motor Oils | • | | |
| Naptha | | • | |
| Natural Gas | • | | |
| Nitric Acid | | • | |
| Nitrogen | • | | |
| Oleum Spirits | | | • |
| Oxygen | • | | |
| Ozone | | • | |
| Crude Oil | • | | |
| Phosphoric Acid | | | • |
| Propane | • | | |
| Propanol | • | | |
| Pydraul | | • | |
| Shell Iris 902 | • | | |
| Silicone Greases | • | | |
| Silicone Oils | • | | |
| Skydrol 500 & 7000 | | • | |
| Soap Solutions | • | | |
| Steam Below 320°F | | • | |
| Stoddard Solvent | • | | |
| Sulfuric Acid | | | • |
| Tolulene | | | • |
| Transmission Fluid A | • | | |
| Trisodium Phosphate | • | | |
| Turpentine | • | • | |
| Water to 220°F (104°C) | • | | |
| Water to 302°F (150°C) | | • | |

Other diaphragm materials are available. Consult factory for stock.

Temperature Conversions - [Formula °C = 5/9 (°F - 32°) °F = (9/5 °C) +32°]

| °C | °F | °C | °F | °C | °F | °C | °F | °C | °F |
|----|-------|----|-------|-----|-------|-----|-------|-----|-------|
| 40 | 104.0 | 62 | 143.6 | 84 | 183.2 | 106 | 222.8 | 128 | 262.4 |
| 41 | 105.8 | 63 | 145.4 | 85 | 185.0 | 107 | 224.6 | 129 | 264.2 |
| 42 | 107.6 | 64 | 147.2 | 86 | 186.8 | 108 | 226.4 | 130 | 266.0 |
| 43 | 109.4 | 65 | 149.0 | 87 | 188.6 | 109 | 228.2 | 131 | 267.8 |
| 44 | 111.2 | 66 | 150.8 | 88 | 190.4 | 110 | 230.0 | 132 | 269.6 |
| 45 | 113.0 | 67 | 152.6 | 89 | 192.2 | 111 | 231.8 | 133 | 271.4 |
| 46 | 114.8 | 68 | 154.4 | 90 | 194.0 | 112 | 233.6 | 134 | 273.2 |
| 47 | 116.6 | 69 | 156.2 | 91 | 195.8 | 113 | 235.4 | 135 | 275.0 |
| 48 | 118.4 | 70 | 158.0 | 92 | 197.6 | 114 | 237.2 | 136 | 276.8 |
| 49 | 120.2 | 71 | 159.8 | 93 | 199.4 | 115 | 239.0 | 137 | 278.6 |
| 50 | 122.0 | 72 | 161.6 | 94 | 201.2 | 116 | 240.8 | 138 | 280.4 |
| 51 | 123.8 | 73 | 163.4 | 95 | 203.0 | 117 | 242.6 | 139 | 282.2 |
| 52 | 125.6 | 74 | 165.2 | 96 | 204.8 | 118 | 244.4 | 140 | 284.0 |
| 53 | 127.4 | 75 | 167.0 | 97 | 206.6 | 119 | 246.2 | 141 | 285.8 |
| 54 | 129.2 | 76 | 168.8 | 98 | 208.4 | 120 | 248.0 | 142 | 287.6 |
| 55 | 131.0 | 77 | 170.6 | 99 | 210.2 | 121 | 249.8 | 143 | 289.4 |
| 56 | 132.8 | 78 | 172.4 | 100 | 212.0 | 122 | 251.6 | 144 | 291.2 |
| 57 | 134.6 | 79 | 174.2 | 101 | 213.8 | 123 | 253.4 | 145 | 293.0 |
| 58 | 136.4 | 80 | 176.0 | 102 | 215.6 | 124 | 255.2 | 146 | 294.8 |
| 59 | 138.2 | 81 | 177.8 | 103 | 217.4 | 125 | 257.0 | 147 | 296.6 |
| 60 | 140.0 | 82 | 179.6 | 104 | 219.2 | 126 | 258.8 | 148 | 298.4 |
| 61 | 141.8 | 83 | 181.4 | 105 | 221.0 | 127 | 260.6 | 149 | 300.2 |

Pressure Conversion Formulas

| Into > Multiply by To Convert | PSI | H2O (15°C) | mmHg (0°C) | "Hg (0°C) | Millibar | Bar | Kg/Cm2 | kPa |
|-------------------------------------|---------|------------|------------|-----------|----------|-----------|-----------|---------|
| PSI | • | 27.70 | 51.71 | 2.036 | 68.95 | 0.06895 | 0.07031 | 6.895 |
| "H2O (15°C) | 0.03609 | • | 1.867 | 0.07349 | 2.489 | 0.002489 | 0.002538 | 0.249 |
| mmHg (0°C) | 0.01934 | 0.5357 | • | 0.03937 | 1.3333 | 0.0013333 | 0.0013596 | 0.113 |
| "Hg (0°C) | 0.4912 | 13.61 | 25.40 | • | 33.86 | 0.03386 | 0.03453 | 3.386 |
| Millibar | 0.0145 | 0.4018 | 0.750062 | 0.02953 | • | 0.001 | 0.0010197 | 0.09998 |
| Bar | 14.50 | 401.8 | 750.062 | 29.53 | 1000 | • | 1.0197 | 99.98 |
| Kg/Cm2 | 14.22 | 394.05 | 735.559 | 28.96 | 980.7 | 0.9807 | • | 98.05 |
| kPa | 0.145 | 4.016 | 7.519 | 0.2953 | 10.002 | 0.010 | 0.0102 | • |

Glossary of Terms

Snap-Action Switches

Nason uses only the highest quality snap-action electrical switches which insure a positive, instantaneous electrical contact under all operating conditions. Nason electrical switches are UL, CSA, CE, and military listed. Ask about our new environmentally sealed snap-action switch.

Diaphragms

Nason pressure switches incorporate elastomer diaphragms to provide a positive media seal. Nitrile is the material of choice for most applications. Ethylene propylene, fluorocarbon, fluorosilicon, and neoprene are readily available for specific applications.

Differential

A distinct change in pressure (or temperature for temperature switches) is necessary to reset a Nason snap-action switch to its original electrical state. This feature prevents “searching” and maximizes switch and system life. Catalog ranges are typical mid-range and can be varied with special construction.

Electrical Connections

A wide variety of electrical connectors are readily available for most applications. Screw terminals, wire leads, blades, studs, conduit, automotive DIN and military connectors are stock items.

Media Connections

Nason’s offering of media connections is unmatched in the industry. NPT, BSP, SAE, JIS, DIN, MS and many others are readily available.

Electrical Circuits

A unique variety of electrical contact arrangements allows the system designer to achieve complex logic at minimal cost. Contact arrangements up to form ZZ and isolated dual set points are available.

Electrical Rating

Most Nason switches are available in a nominal 5 or 10 AMP rating. Gold plated contacts for low current and 25 AMP ratings are also available.

Life

The operational life of a Nason switch is normally in excess of one million cycles. Operating life depends on many variables, and specific tests should be run if marginal conditions exist.

Application

Nason switches are used successfully in a great variety of pneumatic and hydraulic applications. Military vehicles and equipment, aviation, marine, machine tools, farm and construction equipment, process equipment, medical equipment, and industrial machinery are typical applications.

Customization

Nason has the experience and willingness to customize any switch to meet specific application requirements. Special media connections, electrical connections, circuitry and construction materials can be designed and produced as needed.


Installation Torques

Pressure Switch - 10 ft lbs


Temperature Switch - 14-15 ft lbs.

Circuitry

Adjustable Pressure Switch
Component Symbol



Fixed Pressure Switch
Component Symbol





AIROYAL COMPANY

AUTHORIZED

NASON

Distributor

SALES@AIROYAL.BIZ | AIROYALCOMPANY.NET

NEW JERSEY

43 Newark Way, Maplewood, NJ 07040

973-761-4150 Fax 973-761-5731

PENNSYLVANIA

610-314-5566 Toll Free: 866-247-6645

DELAWARE & MARYLAND

Toll Free: 866-247-6645 Fax 410-235-0011

NEW YORK

306 Commack Rd. Ste. 200, Commack, NY 11725

516-248-4833 Fax 631-499-0119